




**Pomona
ACCESS**

FAX ON DEMAND This symbol indicates immediate Fax-On-Demand Technical Information is available. Dial (U.S.) (800) 444-6785, (Outside U.S.) (909) 469-2991. Enter the Pomona Access number (shown in italics) when prompted.

Patch Cords and Test Leads

BANANA PLUG TO BANANA JACK


18 AWG Wire, .144 O.D.
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90602	4702-12-*	12"	4.95
	4702-18-*	18"	4.95
	4702-24-*	24"	4.95
	4702-36-*	36"	4.95
	4702-48-*	48"	5.15
	4702-60-*	60"	5.15

RETRACTABLE SHEATH BANANA PLUG TO BANANA JACK

18 AWG Wire, .144 O.D.
RATING: 1000V AC/DC Max., 7 Amps, +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90629	5259-12-*	12"	6.65
	5259-24-*	24"	6.65
	5259-36-*	36"	6.65
	5259-48-*	48"	6.90

MINIGRABBER® TEST CLIP TO BANANA JACK


Hook attaches to component leads up to .060 O.D.
20 AWG Wire, .087 O.D.
RATING: 300V, 5 Amps, +50°C (+122°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90599	4649-12-*	12"	6.20
	4649-24-*	24"	6.20
	4649-36-*	36"	6.20
	4649-48-*	48"	6.60

ALLIGATOR TEST CLIP TO INSULATED SPADE LUG


Jaws open to .300.
18 AWG Wire, .144 O.D.
RATING: 150V, 5 Amps, +50°C (+122°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90420	1960-12-*	12"	6.80
	1960-24-*	24"	6.80
	1960-36-*	36"	6.80
	1960-48-*	48"	7.20
	1960-60-*	60"	7.20

MINIGRABBER® TEST CLIP TO MINIATURE STACKING BANANA PLUG


Hook attaches to component leads up to .060 O.D.
20 AWG Wire, .087 O.D.
RATING: 300V, 5 Amps, +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90583	3784-12-*	12"	4.10
	3784-24-*	24"	4.10
	3784-36-*	36"	4.10
	3784-48-*	48"	4.55
	3784-60-*	60"	4.55

MULTI-STACKING BANANA PLUG TO INSULATED SPADE LUG


18 AWG Wire, .144 O.D.
RATING: 5000 VDC, 15 Amps, +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.

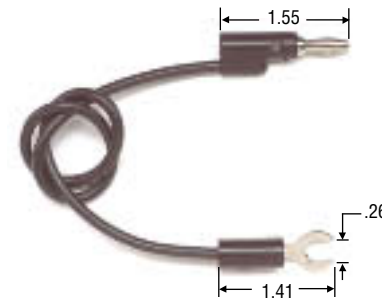

Pomona ACCESS	Part No.	Length	PRICE
90540	1370-12-*	12"	5.25
	1370-24-*	24"	5.25
	1370-36-*	36"	5.25
	1370-48-*	48"	5.40
	1370-60-*	60"	5.65

MINIATURE STACKING BANANA PLUG PATCH CORD


20 AWG Wire, .087 O.D.
RATING: 3000 VDC, 5 Amps +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90470	1081-4-*	4"	5.05
	1081-8-*	8"	5.05
	1081-12-*	12"	5.05
	1081-18-*	18"	5.05
	1081-24-*	24"	5.05
	1081-36-*	36"	5.05
	1081-48-*	48"	5.40
	1081-60-*	60"	5.40

INSULATED SPADE LUG PATCH CORD

18 AWG Wire, .144 O.D.
RATING: 5000 VDC, 7 Amps, +55°C (+131°F) Max.
*STD COLORS: -0 blk, -2 red.



Pomona ACCESS	Part No.	Length	PRICE
90834	1743-12-*	12"	7.35
	1743-24-*	24"	7.35
	1743-36-*	36"	7.35
	1743-48-*	48"	7.75
	1743-60-*	60"	7.75