

## Base strip - PC 6-16/ 5-GF-10,16 - 1913743

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 41 A, Rated voltage (III/2): 1000 V, Number of positions: 5, Pitch: 10.16 mm, Color: green, Contact surface: Silver, Mounting: Soldering, The nominal current of 76 A applies in connection with connectors from the PC 16 family. 41 A are reached in connection with PC 6 connectors (50 A in accordance with UL).

The illustration shows a 6-position version



### Key commercial data

Packing unit	50 pc
Minimum order quantity	50 pc
GTIN	 4 017918 179229
Weight per Piece (excluding packing)	22.09 g
Custom tariff number	85366990
Country of origin	Poland

### Technical data

#### Dimensions

Length	32 mm
Height	13.7 mm
Pitch	10.16 mm
Dimension a	40.64 mm

#### General

Range of articles	PC 6-16/..-GF
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1000 V
Nominal current I <sub>N</sub>	41 A
Color	green

# Base strip - PC 6-16/ 5-GF-10,16 - 1913743

## Technical data

### General

Number of positions	5
---------------------	---

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

---

#### Approvals

UL Recognized / SEV / cUL Recognized / CCA / EAC / IECCEB Scheme / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

## Approval details

# Base strip - PC 6-16/ 5-GF-10,16 - 1913743

## Approvals

UL Recognized			
	B	C	D
Nominal current IN	66 A	66 A	5 A
Nominal voltage UN	300 V	300 V	600 V

SEV	
Nominal current IN	76 A
Nominal voltage UN	1000 V

cUL Recognized			
	B	C	D
Nominal current IN	66 A	66 A	5 A
Nominal voltage UN	300 V	300 V	600 V

CCA	
Nominal current IN	76 A
Nominal voltage UN	1000 V

EAC
-----

IECEE CB Scheme	
Nominal current IN	76 A
Nominal voltage UN	1000 V

cULus Recognized	
------------------	--

## Accessories

Accessories

Coding element

# Base strip - PC 6-16/ 5-GF-10,16 - 1913743

## Accessories

Coding profile - CP-HCC 4 - 1600027

Coding profile, Number of positions: 1, Color: red



---

## Additional products

Printed-circuit board connector - PC 6/ 5-STF-10,16 - 1913604


Plug component, Nominal current: 41 A, Rated voltage (III/2): 1000 V, Number of positions: 5, Pitch: 10.16 mm, Connection method: Screw connection, Color: green, Contact surface: Silver



---

## Drawings

Dimensioned drawing

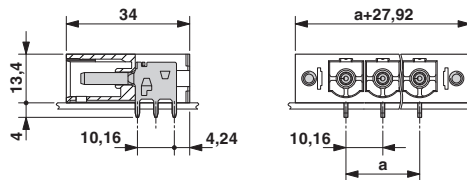

# Base strip - PC 6-16/ 5-GF-10,16 - 1913743

Drilling diagram

