





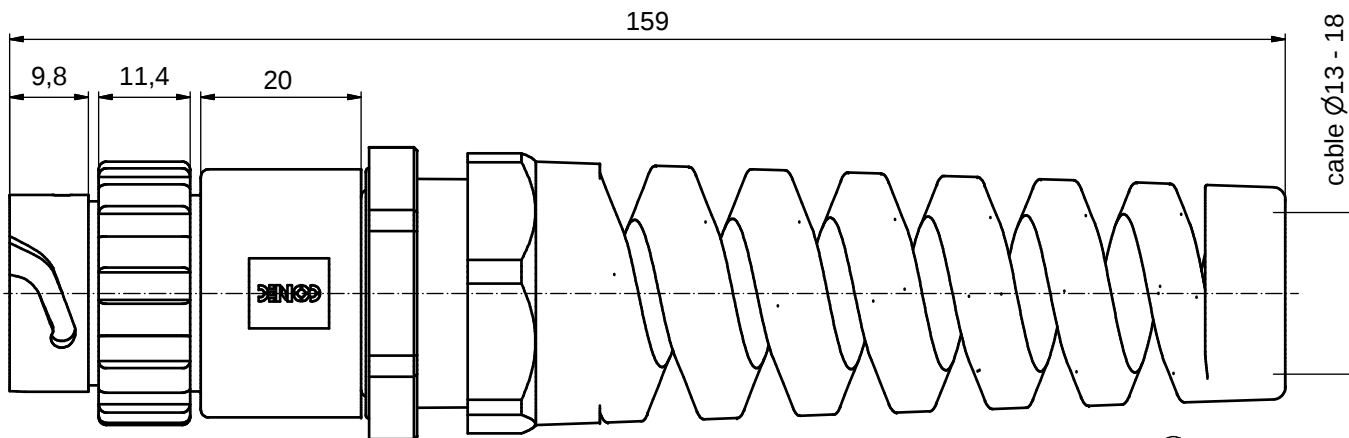


(c) NOTES:

- CONNECTOR KIT IS RECCOMENDED FOR USE WITH FOLLOWING CABLE TYPE:
3 CONDUCTOR AWG 12, TYPE SOOW
3 CONDUCTOR AWG 14, TYPE SOOW
- MATERIAL AND FINISH:
- COUPLER RING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- SOCKET HOUSING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- CABLE GLAND: PA (BLACK), UL94 V-0; UL (f1) RATED
- CABLE GLAND RUBBER RING: NBR; COLOR: BLACK
- CABLE FITTING: PA (BLACK); UL94 V-0; UL (f1) RATED
- INTERFACIAL SEAL: SILICONE; COLOR: BLUE
- RETAINING RING: STAINLESS STEEL
- HIGH POWER CONTACTS; CRIMP; 20A
- CAN BE CRIMPED WITH STRANDED COPPER WIRES: AWG 12 - 14
- MATERIAL: COPPER ALLOY
- PLATING, MATING AREA: GOLD FLASH OVER NICKEL
- PLATING, TERMINATION SIDE: 160 - 240µin TIN OVER 80µin NICKEL
- PROTECTION SLEEVE: NICKEL PLATED
- CONTACTS WILL BE SUPPLIED LOOSE
- CRIMPING: USE CRIMP TOOL 360X21079X WITH TOOL INSERT 36-000430
- TURRET POSITION: 12
- SELECTOR SITTINGS: 8 FOR AWG 12, 7 FOR AWG 14
- OPERATING TEMPERATURE: -40°C to +100°C
- WORKING VOLTAGE: max. 250V AC/DC
- IP67 RATED WHEN COVERED OR FULLY MATED WITH THE APPROPRIATE MATING CONNECTOR
- ASSEMBLY INSTRUCTION: AI-5041-POWER

3 CONTACTS WILL BE SUPPLIE LOOSE

STRIPPING DIMENSIONS

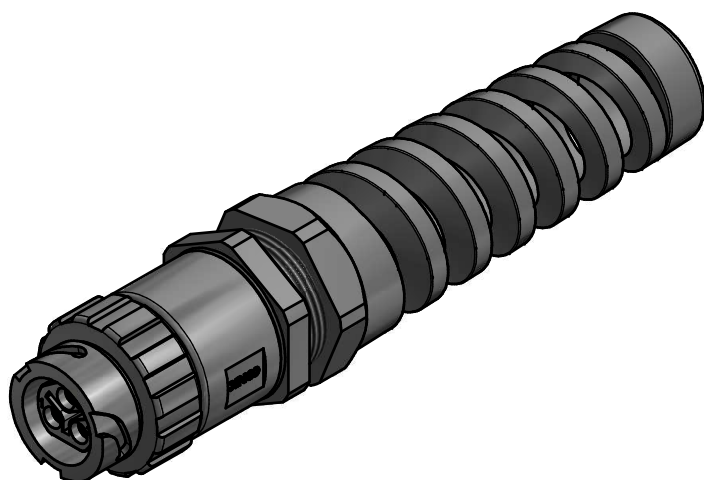

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				DO NOT ALTER CAD DRAWING BY HAND						scale: 1,5:1	
										material: see notes	
										title: IP67 POWER BAYONET 3pos. SOCKET KIT / CRIMP cable mount Ø13-18mm	
1 x c	Ä6229	06.07.16	M.H.	d-old			dwg no:		DIN-A3		
1 x b	Ä5820	16.09.2015	K.H.				17K1A422		sh: 1		
a	Original										
rev.	description	date	name						part no:		17-400163