
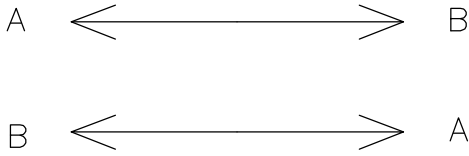


1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB
PLUS CABLE ATTENUATION OF 1.5 dB/km
at 1300nm. (SEE TABLE)

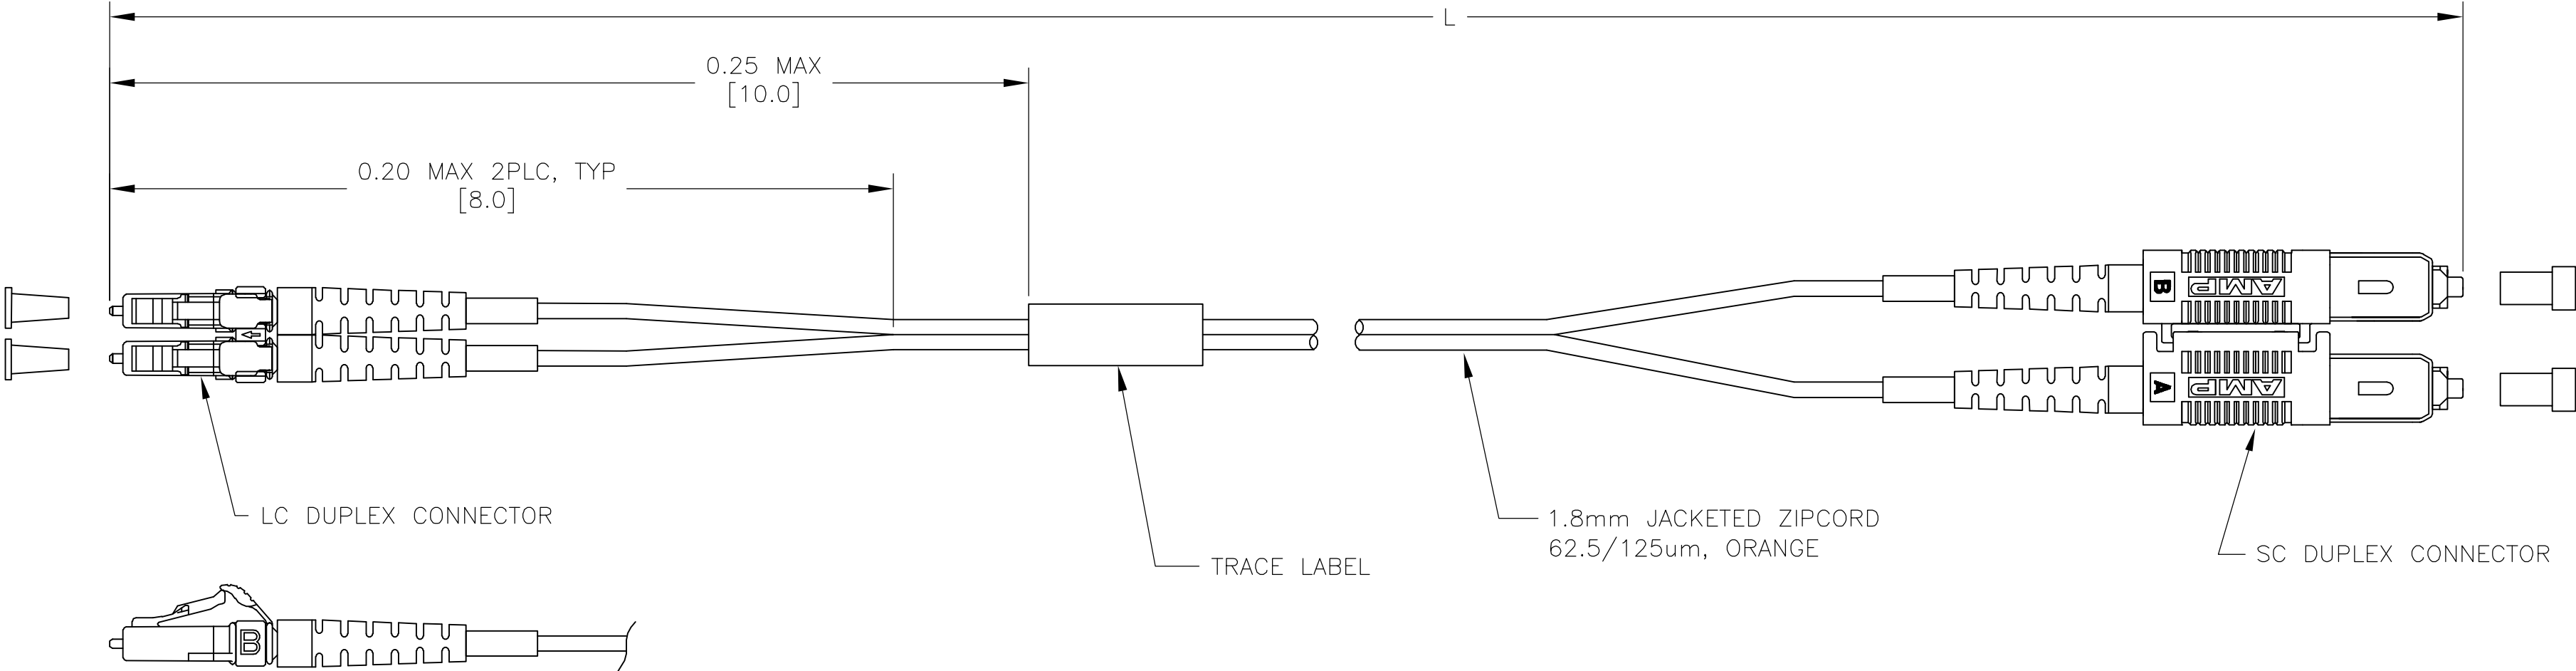

0.53	20.00±0.30 [787.0±12.0]	2-1828870-0
0.50	15±0.15 [590.6±6.0]	1-1828870-5
0.50	10±0.15 [393.7±6.0]	1-1828870-0
0.50	5.00±0.08 [196.9±3.0]	1828870-5
0.50	4.00±0.08 [157.5±3.0]	1828870-4
0.50	3.00±0.05 [122.8±2.0]	1828870-3
0.50	2.00±0.05 [78.7±2.0]	1828870-2
0.50	1.00±0.05 [39.4±2.0]	1828870-1
△CONNECTOR LOSS (dB)	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

19SEP05

KATHY HE

CHK

19SEP05

RECHARD ZHAO

APVD

19SEP05

J.DUNCAN

DIMENSIONS:

METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH -

MATERIAL

-

DWN

19SEP05

KATHY HE

CHK

19SEP05

RECHARD ZHAO

APVD

19SEP05

J.DUNCAN

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

NAME

CABLE ASSEMBLY, LC-SECURE/SC,DUPLEX
1.8mm ZIP, 62.5/125um, GREEN

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=1828870

—

SCALE

NTS

SHEET

1

OF

1

REV

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1828870-2](#)