

D

C

B


A

D

C



B

A

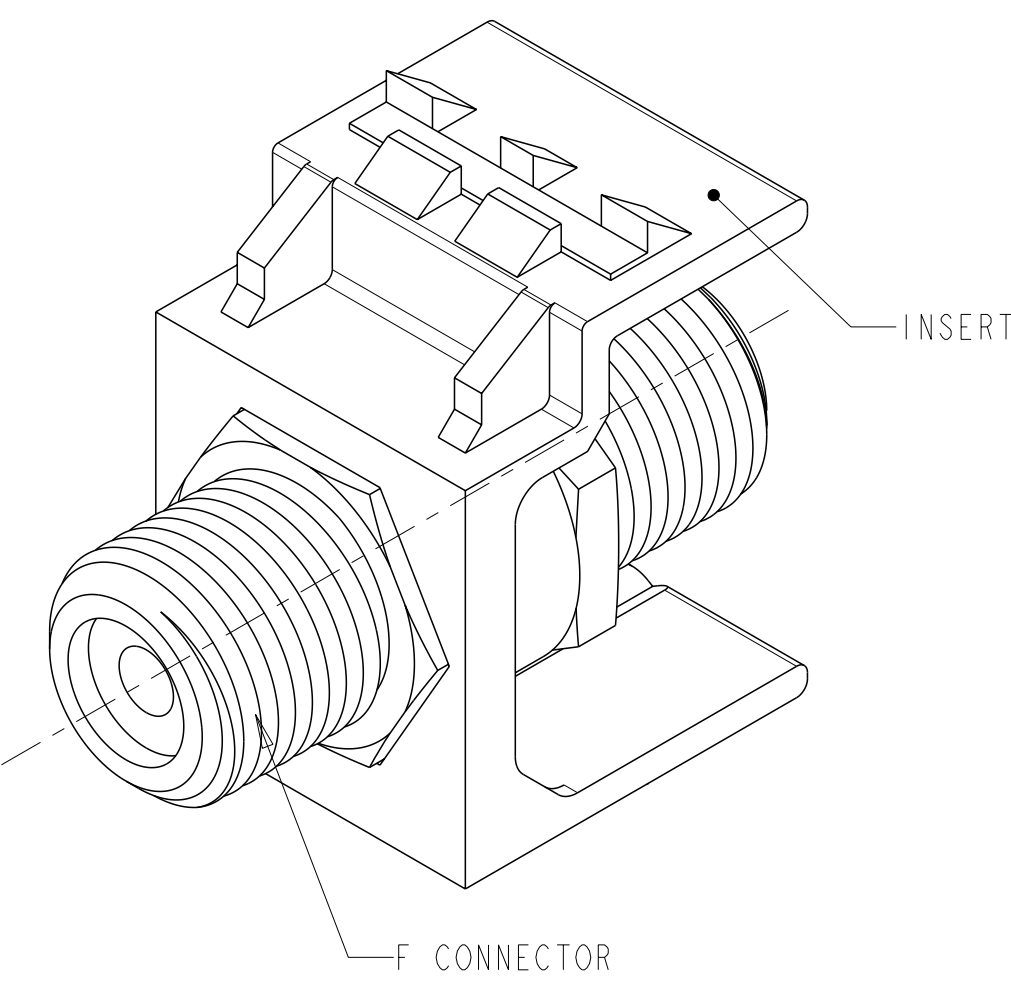

⚠ MATERIAL:
INSERT: POLYCARBONATE MOLDING COMPOUND.
SEE TABLE FOR COLOR.
CONNECTOR: NICKEL PLATED ZINC.

2. ELECTRICAL SPECIFICATION:
IMPEDANCE: 75 Ohms.
INSULATION RESISTANCE: 500M Ohms.
WITHSTAND VOLTAGE: 500 VAC ONE MINUTE.
VOLTAGE RATING: 150 VAC.
DURABILITY: 500 CYCLES.
BANDWIDTH: -41.25dB@1.0GHz
-29.85dB@2.0GHz
-26.48dB@2.5GHz
-21.12dB@3.0GHz

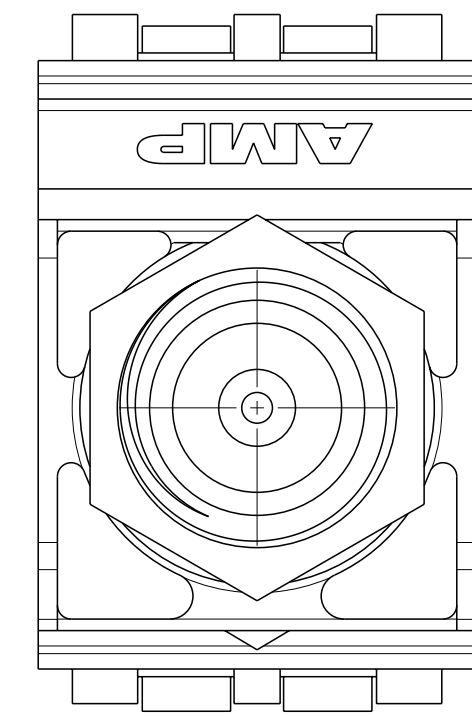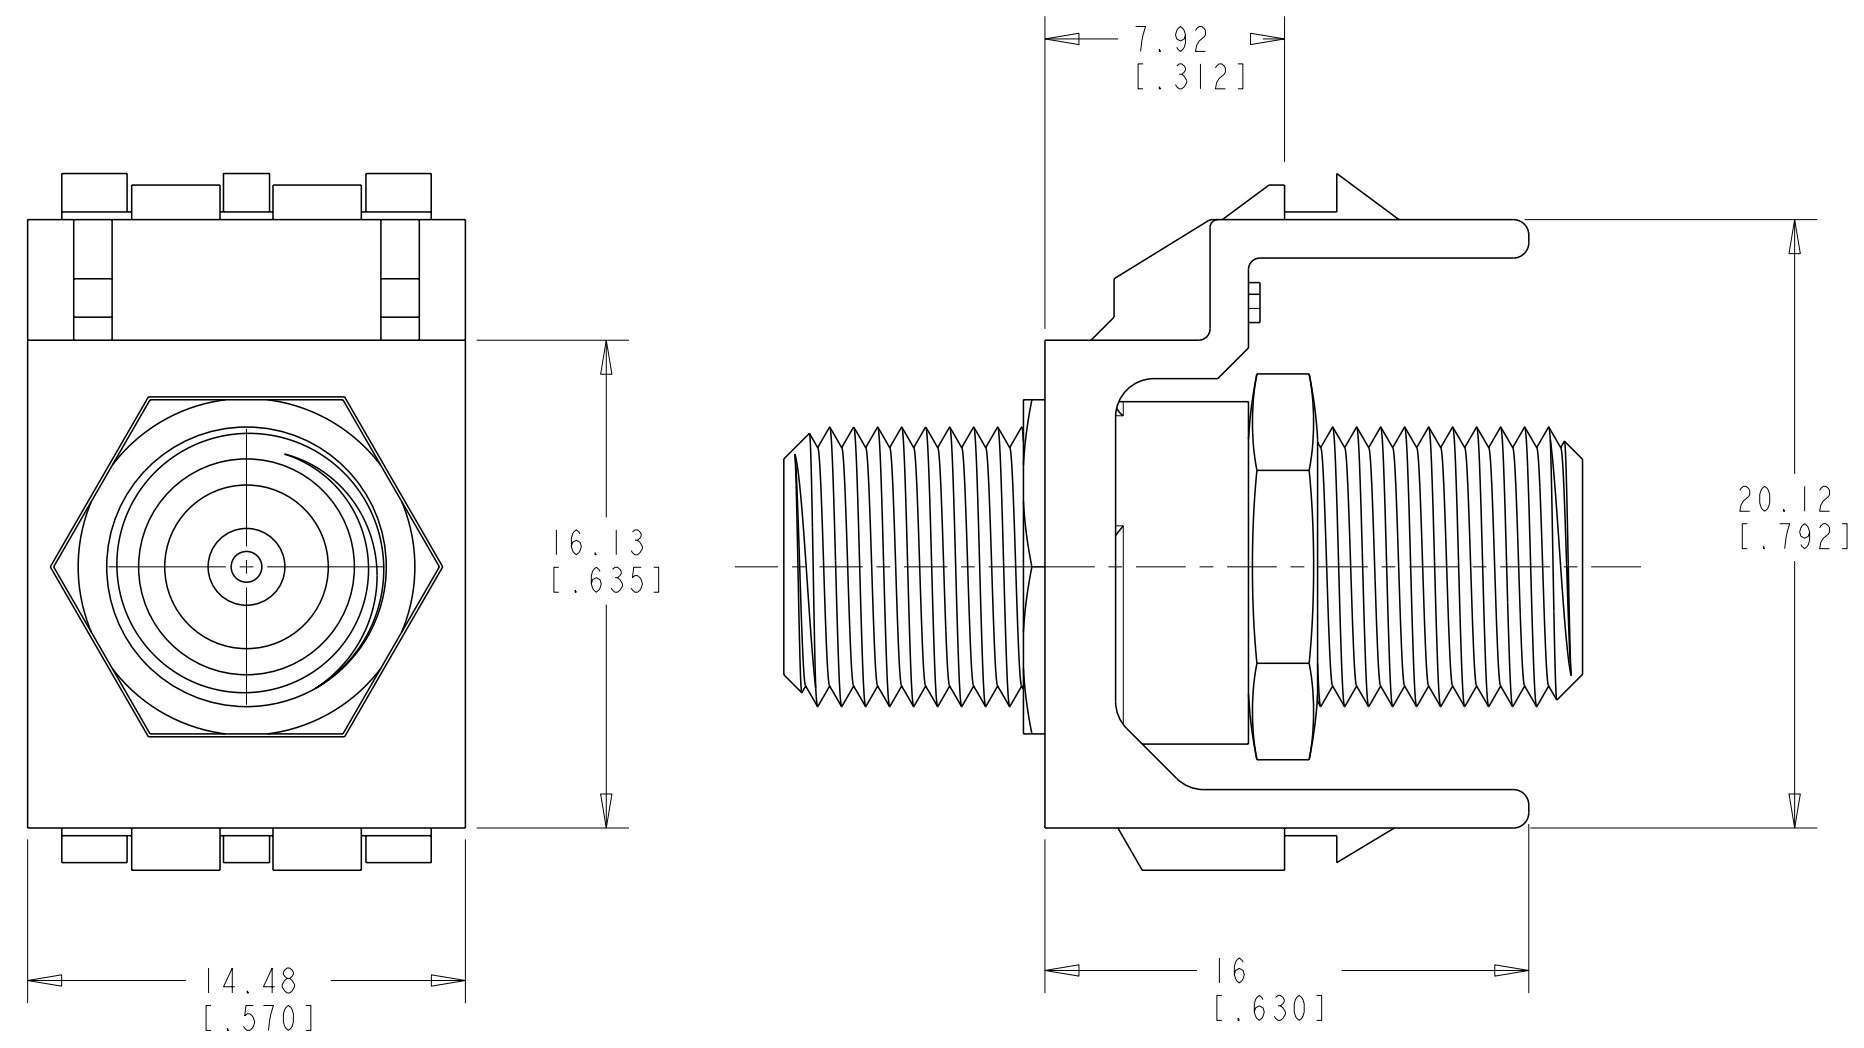

ALPINE WHITE	I-1499855-3
ELEC IVORY	I-1499855-1
GRAY	I499855-4
WHITE	I499855-3
BLACK	I499855-2
LT ALMOND	I499855-1
COLOR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±.13 [.005]
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	

MATERIAL

⚠

DWN J MCNEAL 16 JAN 2006

CHK G BOWMAN 23 MAR 2006

APVD G BOWMAN 23 MAR 2006

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME ASSY, F INSERT, 3 GHz, SL SERIES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C-1499855

-

SCALE

4:1

SHEET

1

OF

1

REV

D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1499855-3](#)