
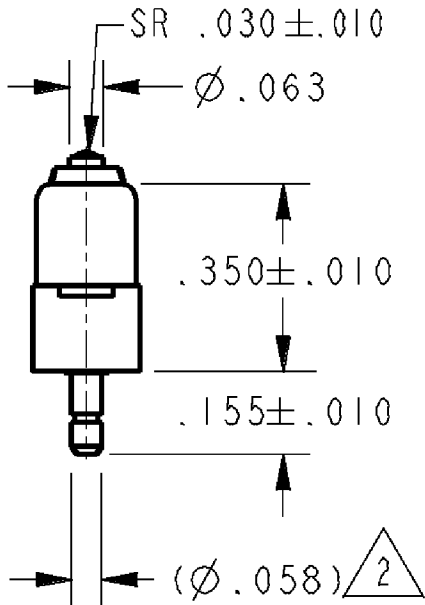


HONEYWELL PART NUMBER
12SX3-H58
PRODUCT CODE VDK1076
JG-NUMBER JG-83584

REV	DOCUMENT	CHANGED BY	CHECK
4	0038448	VS 28APR08	BLR

PLASTIC PLUNGER

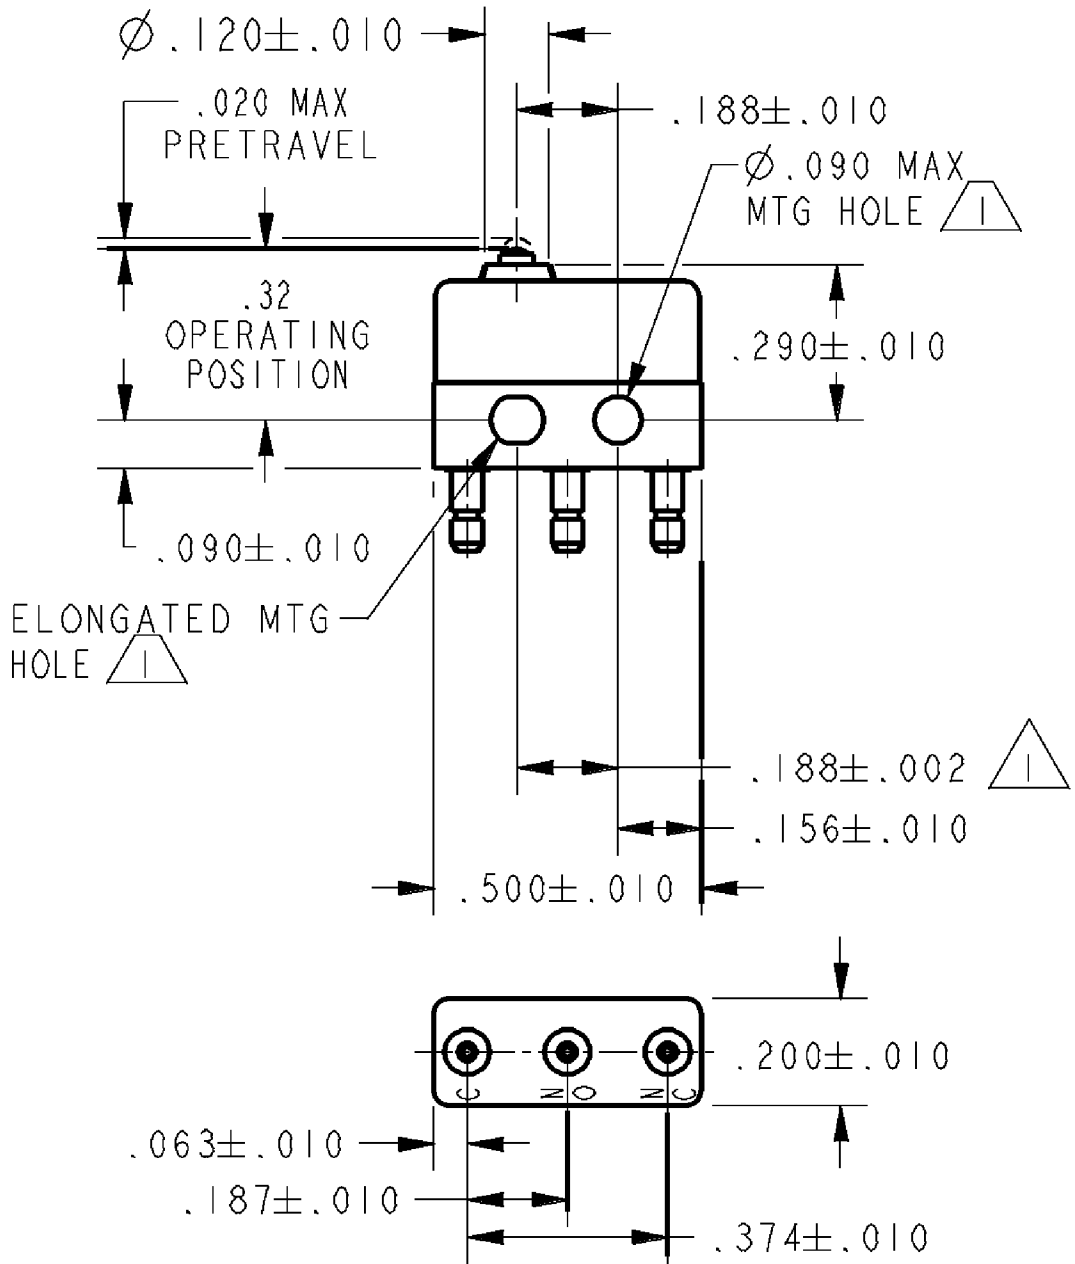

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.188 \pm .002$ CENTERS
 - 2 PLATED TERMINALS WILL ACCEPT "AMP INC" $\phi .058$ PIN RECEPTACLES
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF $250^{\circ}F$
 - 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD
 - 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-21701
REPLACES	X98008-SX

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	SPK	13FEB08	Honeywell															
OPERATING FORCE — — 2.5 - 5 OZ MAX		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK	RJ	13FEB08																
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC															
DIFFERENTIAL TRAVEL— — — .001 MAX					ONE PLACE .X ±																				
OVERTRAVEL — — — — — .004 MIN		SEA LEVEL 50,000 FT			TWO PLACE .XX ±																				
		INDUCTIVE .010 AMP			THREE PLACE .XXX ±																				
		RESISTIVE .010 AMP			FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B				TYPE I				DRAWING NAME 12SX3-H58				REV 4			
		-			ANGLES ±																				
		APPROVALS			THIRD ANGLE PROJECTION		RASTER			SCALE -				WEIGHT:.003 LB MAX				SHEET 1 OF 1							
		KEMA, CE 1A 250 V ~ T125 25E3  																							
		UL, CSA 1A 125 VAC   BRAND L22J																							