

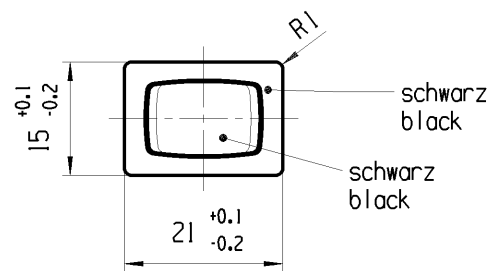
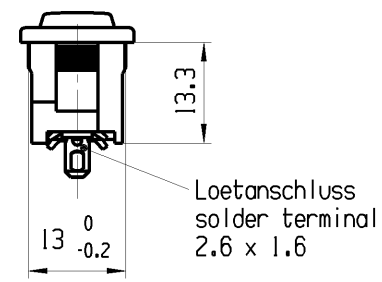


1	2	3	4
A	Empfohlener Ausschnitt fuer Rastbefestigung (Grat gegenueber Bestueckungsseite) recommended cut-out for snap-in fixing (ledge opposite to snap-in direction)		Ausschnittlaenge length of cut-out
	Wanddicke wall thickness		Ausschnittbreite width of cut-out
	0.75 to / bis 1.25		19.2 ^{-0.1}
	1.25 to / bis 2		19.4 ^{-0.1}
	2 to / bis 3		19.8 ^{-0.1}
			12.9 ^{+0.1}
			12.9 ^{+0.1}
			12.9 ^{+0.1}

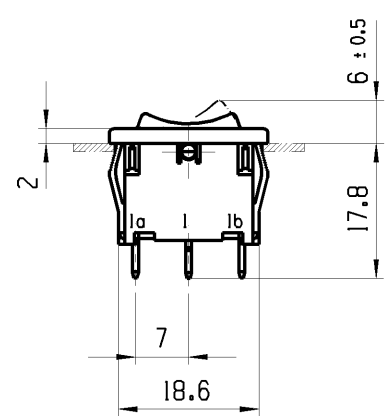

Aufschrift
marking

1808. μ
6(2)/250 ~T100/55
05

6A 125-250V AC
1/8HP
R58

Herstellort/-jahr/-woche nach DIN EN 60062
code of manufacture: place/year/week acc. to DIN EN 60062

Umschalter 1-polig
Mit Ausstellung in der Mitte
Tastfunktion einseitig
Fuer Gerate der Klasse II geeignet
SPDT
with centre-off
biased from one side
suitable for appliances of class II

fuer Form und Lage FOR SHAPE AND LOC.		⊙ =		Allgemeintoleranzen UNTOLERANCED DIMENSIONS					Pause COPY		Blatt SHEET 01		TYP	Zeichn./DRAWING NO.		Index			
				PROJEKTION		Abmasse und Nennmassbereiche Angaben in mm		Laenge LENGTH Radien RADI				Original		Masstab		K	18086202		a
fuer Winkel FOR ANGLE ± 2								ALL DIMENSIONS ARE IN MILLIMETRES				Din A4		SCALE 1 : 1		GERAETESCHALTER appliance switch			
												0 10 20 30mm							
												CAD: NX V6.0		 MARQUARDT					
a		64492		20.10.09		MUT						gez./DRAWN BY 05.10.06						MUT	
		48542		09.11.06		MUT						gepr./CHECKED BY							
Ausg. ISSUE		Aenderung REVISION		gez. DRAWN BY		Ausg. ISSUE		Aenderung REVISION		gez. DRAWN BY		Ersatz fuer/REPLACEMENT OF							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Marquardt:](#)

[1808.6202](#)