


## Panel mounted socket - Part no. 1461



- screw terminals
- TorsionSpringCONTACT
- straight
- receptacles with pilot contact: part no. + index P

|                       |                                       |
|-----------------------|---------------------------------------|
| Protection type       | IP 67                                 |
| Ampere                | 125 A                                 |
| Poles                 | 5p                                    |
| Voltage               | 400                                   |
| Hertz                 | 50-60Hz                               |
| Earth position        | 6h                                    |
| Contact               | standard                              |
| Connection technology | Screw terminals, TorsionSpringCONTACT |

Std. Pack. 5 Qty.

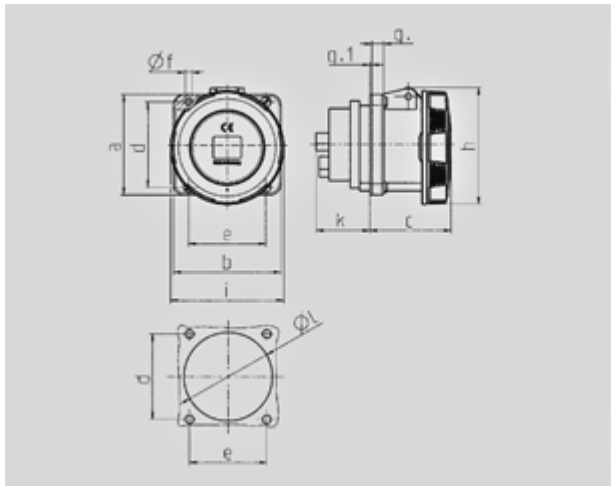

| Drawing                                          | Amp.  | 63  |     |     | 125 |     |
|--------------------------------------------------|-------|-----|-----|-----|-----|-----|
| 1 MB 212/258                                     | Poles | 3   | 4   | 5   | 4   | 5   |
| Dim. in mm                                       | a     | 107 | 107 | 107 | 130 | 130 |
|                                                  | b     | 100 | 100 | 100 | 130 | 130 |
|                                                  | c     | 81  | 81  | 81  | 119 | 119 |
|                                                  | d     | 85  | 85  | 85  | 104 | 104 |
|                                                  | e     | 77  | 77  | 77  | 104 | 104 |
|                                                  | f     | 6   | 6   | 6   | 6,5 | 6,5 |
|                                                  | g     | 12  | 12  | 12  | 18  | 18  |
|                                                  | g.1   | 2   | 2   | 2   | 2   | 2   |
|                                                  | h     | 117 | 117 | 117 | 129 | 129 |
|                                                  | i     | 113 | 113 | 113 | 126 | 126 |
|                                                  | k     | 55  | 55  | 55  | 43  | 43  |
|                                                  | l     | 88  | 88  | 88  | 95  | 95  |
| Terminal for cond. cross section (mm²) min.-max. |       | 6   | 6   | 6   | 25  | 25  |
|                                                  |       | -25 | -25 | -25 | -70 | -70 |