

图	电路	电流	端子英寸 (mm)	触动物	触动物长度英寸 (mm)	最大操作力 (克)	Digi-Key 零件编号	1	10	100	Cherry 零件编号	
4A	DPDT	10A	.187 QC (4.75)	瞬时	.875 (22.23)	680	CH157-ND	8.10	7.40	5.64	E79-00A	
4B	DPDT	10A	.187 QC (4.75)	推挽式 (复位)	.920 (23.37)	510	CH392-ND	7.16	6.36	4.58	E79-20A	
4B	DPDT	10A	.187 QC (4.75)	瞬时逃脱联锁	.980 (24.89)	757/567	CH158-ND	8.10	7.40	5.64	E79-30A	
防水和防尘密封 - E72 系列												
5	SPDT	10A	10" 导线	按片	.858 (21.79)	67	CH391-ND	9.38	8.68	7.27	E72-40HT	
线路中断开关 - F80												
6	SPST	16A	.250 QC (6.35)	仅有冲杆	—	866	CH307-ND	13.34	11.86	8.53	F82A-A120	
轻压和标准力开关 - E 系列												
7A	SPDT	0.1A	.187 QC (4.75)	仅有冲杆	—	75	CH331-ND	4.10	3.65	3.04	E21-00A	
7B	SPDT	0.1A	.187 QC (4.75)	长按片	1.40 (35.56)	35	CH333-ND	6.94	5.88	4.54	E21-50H	
7B	SPDT	3A	.187 QC (4.75)	轻压力 - 长按片	1.40 (35.56)	8	CH337-ND	5.13	4.25	3.19	E22-50HX	
7B	SPDT	3A	.187 QC (4.75)	轻压力 - 长按片	2.932 (74.47)	2	CH341-ND	5.37	4.44	3.33	E22-85HX	
7C	SPDT	3A	.187 QC (4.75)	长滚轴	1.34 (34.04)	35	CH339-ND	5.60	4.64	3.48	E22-50K	
7D	SPDT	3A	.187 QC (4.75)	短滚轴	.810 (20.57)	75	CH336-ND	4.81	3.98	2.99	E22-00K	
7A	SPDT	5A	.187 QC (4.75)	仅有冲杆	—	45	CH342-ND	3.48	3.10	2.23	E23-00AX	
7A	SPDT	5A	.187 QC (4.75)	仅有冲杆	—	170	CH343-ND	3.49	2.89	2.17	E23-00A	
7B	SPDT	5A	.187 QC (4.75)	轻压力 - 长按片	2.757 (70.03)	10	CH347-ND	4.73	4.20	3.50	E23-55HX	
7C	SPDT	5A	.187 QC (4.75)	长滚轴	1.34 (34.04)	86	CH346-ND	4.96	4.11	3.08	E23-50K	
7D	SPDT	5A	.187 QC (4.75)	短滚轴	.81 (20.57)	170	CH344-ND	5.77	4.78	3.59	E23-00K	
7B	SPDT	10A	.187 QC (4.75)	长按片	1.40 (35.56)	144	CH351-ND	3.69	3.06	2.29	E33-50H	
7C	SPDT	10A	.187 QC (4.75)	长按片	1.58 (40.13)	22	CH354-ND	3.35	2.98	2.14	E33-75HX	
7D	SPDT	10A	.187 QC (4.75)	短滚轴	.81 (20.57)	285	CH350-ND	4.81	3.99	2.99	E33-00K	
7B	SPDT	15A	.187 QC (4.75)	标准压力 - 按片	1.58 (40.13)	120	CH535-ND	4.19	3.72	2.68	E34-50HL	
7B	SPDT	15A	.187 QC (4.75)	轻压力 - 长按片	1.40 (35.56)	50	CH358-ND	4.73	3.92	2.94	E34-50HX	
7B	SPDT	15A	.187 QC (4.75)	轻压力 - 长按片	2.757 (70.03)	22	CH362-ND	4.14	3.43	2.57	E34-55HX	
用于 E34 系列的标准尺寸绝缘体								CH663-ND	.38	.34	.28	0015-005
用于 E62 系列的小尺寸绝缘体								CH664-ND	.64	.45	.31	0015-0052
用于 E34 系列的大尺寸黑色塑料绝缘体								CH665-ND	.81	.57	.39	0015-0054
微型、国际型 - D4 系列												
8A	SPDT	0.1A	.187 QC (4.75)	按钮	—	75	CH115-ND	5.54	4.59	3.44	D41C-R1AA	
8B	SPDT	0.1A	.187 QC (4.75)	标准比例按片	1.40 (35.56)	35	CH297-ND	6.03	5.00	3.75	D41C-R1LD	
8C	SPDT	0.1A	.187 QC (4.75)	标准比例滚轴	.81 (20.57)	75	CH117-ND	5.43	4.50	3.38	D41C-R1RA	
8B	SPDT	3A	.187 QC (4.75)	高比例按片	2.93 (74.47)	2	CH123-ND	5.34	4.42	3.32	D42L-R1XL	
8A	SPDT	5A	.187 QC (4.75)	按钮	—	170	CH125-ND	2.70	2.40	2.00	D43C-R1AA	
8A	SPDT	5A	.187 QC (4.75)	按钮	—	45	CH129-ND	2.92	2.60	1.87	D43L-R1AA	
8A	SPDT	10A	.187 QC (4.75)	按钮	—	285	CH130-ND	2.74	2.27	1.71	D44C-R1AA	
8A	SPDT	10A	.187 QC (4.75)	按钮	—	75	CH134-ND	3.31	2.74	2.06	D44L-R1AA	
8B	SPDT	10A	.187 QC (4.75)	标准比例按片	1.40 (35.56)	37	CH299-ND	3.16	2.62	1.97	D44L-R1LD	
8B	SPDT	10A	.187 QC (4.75)	高比例按片	2.93 (74.47)	10	CH133-ND	3.94	3.27	2.45	D44L-R1ML	
8C	SPDT	10A	.187 QC (4.75)	标准比例按片	.810 (20.57)	75	CH301-ND	4.44	3.68	2.76	D44L-R1RA	
8A	SPDT	15A	.187 QC (4.75)	按钮	—	100	CH139-ND	3.14	2.60	1.95	D45L-R1AA	
8B	SPDT	15A	.187 QC (4.75)	标准比例按片	.865 (21.97)	400	CH136-ND	3.43	3.05	2.20	D45C-R1LA	
8B	SPDT	15A	.187 QC (4.75)	高比例按片	2.93 (74.47)	13	CH138-ND	4.09	3.39	2.54	D45L-R1ML	
微型、国际型 - D4 系列 - 美国型												
8B	SPDT	0.1A	.187 QC (4.75)	标准比例铅按片	1.40 (35.56)	8	CH578-ND	5.21	4.64	3.86	D41L-R1YD	
8B	SPDT	3A	.187 QC (4.75)	标准比例按片	1.40 (35.56)	35	CH579-ND	3.02	2.69	1.94	D42C-R1LD	
8B	SPDT	3A	.187 QC (4.75)	标准比例铅按片	1.40 (35.56)	8	CH581-ND	4.62	4.11	2.95	D42L-R1YD	
8A	SPDT	15A	.250 QC (6.35)	按钮	—	400	CH594-ND	3.08	2.74	2.28	D45C-V1AA	

图7 E系列




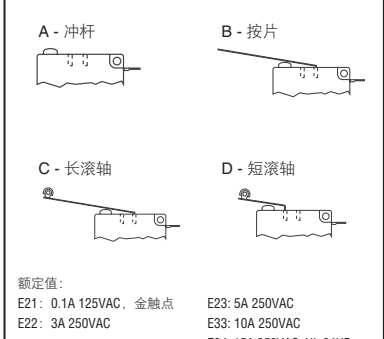


图8 D4系列

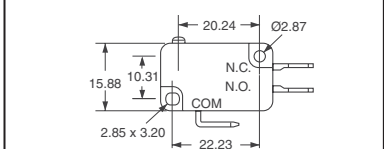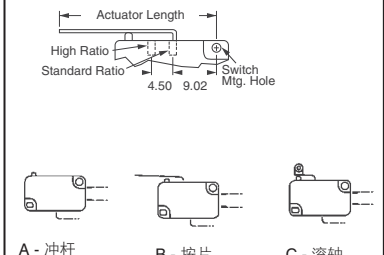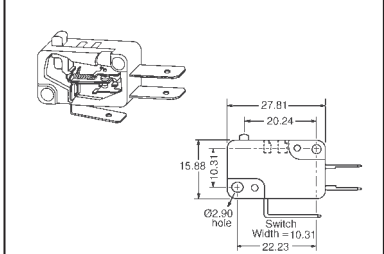

额定值: 187 QC 端子。
 D41: 0.1A 125VAC, 金交叉触点
 D42: 3A 125/250VAC
 D43: 5A, 1/4 H.P., 125/250VAC
 D44: 10A, 1.2 H.P., 125/250VAC
 D45: 15A, 1/2 H.P., 125/250VAC.

全部产品均以美元计价。\$30美元基本运费

2552 (CN2011-ZH) www.digikey.cn — 免费电话: 4008 824 440, 电话: (852) 3104 0500 — 传真: (852) 3104 0686