



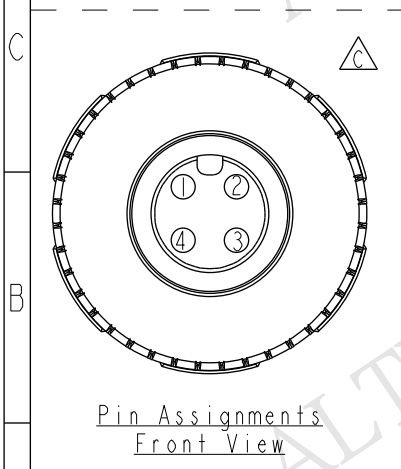
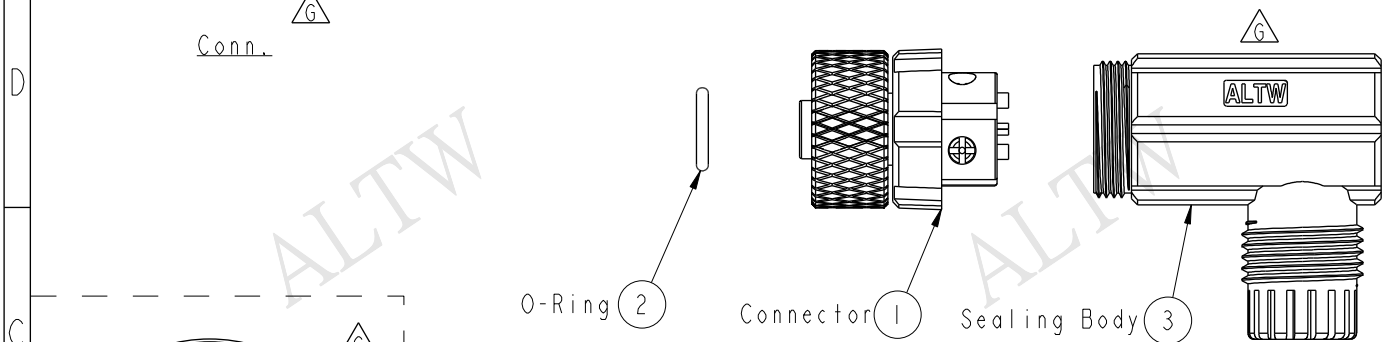


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	LE31190024	2011/06/22	Tao-Cheng	Change Connector Material
F	LEN1350115	2013/05/09	Ruru	Modify Seals For Cable OD
G	LEN15A0244	2015/09/23	Ruru	Change Logo

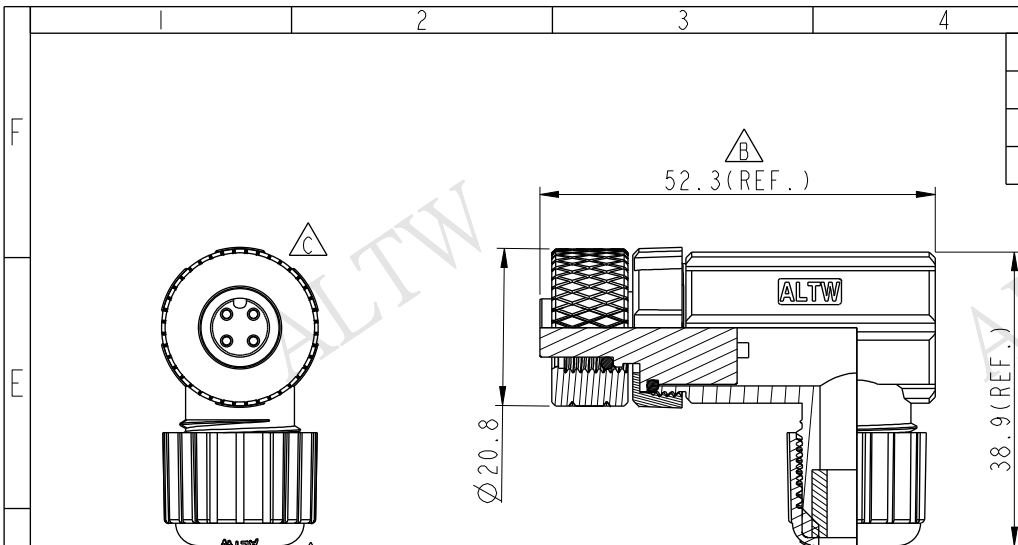

- Note:**
- * **QC** Important Dimensions.
 - * Waterproof Rate: IP67
 - * Connector: M-PPE 540Z, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring 1: Viton, Green.
 - * O-Ring 2: EPDM, Black.
 - * Holder: Nylon+GF, Black
 - * Clamp Ring: Nylon 66, Black.
 - * Gasket: EPDM, Black.
 - * Sealing Nut: Nylon 66, Black.
 - * Nut: Copper Alloy, Nickel Plated
 - * **F** Seals For Cable OD $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
 - * Temperature Range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		M12 Screw In Female Conn 4Pin A Code		12-04BFFB-SR7001		Ruru		2015-09-23	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		1:1		12-04BFFB-SR7001		Rita		2015-09-23	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Lisa		2015-09-23	
ANGLES ±1°		WC-REV.							
		G							
		A.1							
		QC : Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.