

3005 Refrigerator Door Switches Splashproof



3005 25W 25T85 5E4 (50,000 Operations) 250Vac
3006 65W 25T85 5E4 (50,000 Operations) 250Vac



UL 0.3A 250Vac
UL 0.2A 125Vac



RoHS compliant

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.
Technical data on pages 4 & 5.


- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splash Resistant
- ▶ Choice of terminal orientation
- ▶ Choice of actuators



C3005CB



C3005BL

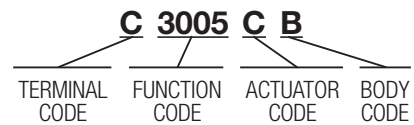


ORDER FORMAT

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BEZEL / TERM ORIENTATION	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>3005</p> <p>ON - OFF (momentary OFF) 1mm max travel to OFF position</p>	<p>B</p> <p>26.0</p>	<p>R L B</p> <p>Terminal direction (viewed from hinge end)</p> <p>Panel cut-out: 12.1/12.2 x 25.4/25.5</p> <p>Bezel: 14.0 x 30.2</p> <p>Bezel Profile: 5.0</p>	<p>Finish Gloss finish only</p> <p>Color White is standard</p> <p>Call factory for custom colors A full range is available for large orders</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>3006</p> <p>ON - OFF (momentary ON) 3mm min travel to ON position</p>	<p>C</p> <p>13.0</p>	<p>R L B</p> <p>Terminal direction (viewed from hinge end)</p> <p>Panel cut-out: 12.1/12.2 x 25.4/25.5</p> <p>Bezel: 14.0 x 30.2</p> <p>Bezel Profile: 5.0</p>	<p>Finish Gloss finish only</p> <p>Color White is standard</p> <p>Call factory for custom colors A full range is available for large orders</p>

Dimensions (mm) (C terminals shown)

3005

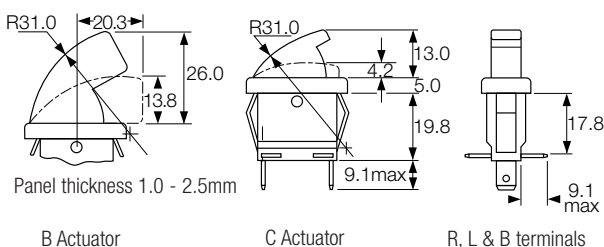

3006

