

Ultra-Miniature 01005 Size Accu-P® **AVX** RF

Thin-Film RF Microwave Capacitor

ACCU-P® TECHNOLOGY

The use of silicon oxide, a very low - loss dielectric material, in conjunction with highly conductive electrode metals, results in low ESR and high Q. These high - frequency characteristics change at a slower rate with increasing frequency than for ceramic microwave capacitors.

ACCU-P® meets the fast - growing demand for low - loss (high - Q) capacitors for use in surface mount technology, especially for the wireless communications market at frequencies up to and above 5.8GHz.

ACCU-P® is currently unique in its ability to offer very low capacitance values (0.05 pF) and ultra tight capacitance tolerances (± 0.01 pF).



APPLICATIONS

- RF Modules
- Mobile communications
- Satellite TV
- Global positioning systems
- Filters
- VCO's
- Matching networks

FEATURES

- Ultra Miniature standard 01005 chip size.
- Ultra tight capacitance tolerances (± 0.01 pF).
- Low ESR and high Q at VHF, UHF and microwave frequencies.
- TC ± 30 , ± 60 ppm/ $^{\circ}$ C.
- Nickel/Solder - coated terminations provide excellent solderability and leach resistance.
- High insulation resistance: IR $\geq 10^{10}$ Ohm.
- Orientation provides high SRF uniformity.
- Repeatable C_{EFF} , ESR and Q vs. Frequency parameters, both lot to lot and within lots, for increased production yields.

HOW TO ORDER



P/N Example: C 0 0 5 Y K 1 R 0 A B S T R

QUALITY AND RELIABILITY

Finished parts are tested for standard electrical parameters and visual / mechanical characteristics.

Each production lot is 100% evaluated for:

- Capacitance
- Q Factor
- DWV at $12.5 \times V_{RATED}$

Each production lot is evaluated on a sample basis for:

- Dimensions
- Insulation Resistance
- Breakdown Voltage
- ESR
- Solderability

In addition, production is periodically evaluated for:

- Mechanical stability
- Endurance (Life)
- Temperature Coefficient
- Accelerated Damp Heat Load (THB)
- Temperature Cycling

Ultra-Miniature 01005 Size Accu-P® **AVX** RF

Thin-Film RF Microwave Capacitor


ACCU-P® 01005 CAPACITANCE RANGE

| Capacitance [pF] | Part Number | Tolerances Z = ±0.01pF P = ±0.02pF Q = ±0.03pF A = ±0.05pF | TC J = ±30ppm/°C K = ±60ppm/°C | Voltage (V) |
|------------------|----------------|--|--------------------------------------|-------------|
| 0.05 | C005YJR05_BSTR | Z, P, Q, A | J | 16 |
| 0.10 | C005YJ0R1_BSTR | Z, P, Q, A | J | 16 |
| 0.15 | C005YJR15_BSTR | Z, P, Q, A | J | 16 |
| 0.20 | C005YJ0R2_BSTR | Z, P, Q, A | J | 16 |
| 0.25 | C005YJR25_BSTR | Z, P, Q, A | J | 16 |
| 0.30 | C005YJ0R3_BSTR | Z, P, Q, A | J | 16 |
| 0.35 | C005YJR35_BSTR | Z, P, Q, A | J | 16 |
| 0.40 | C005YJ0R4_BSTR | Z, P, Q, A | J | 16 |
| 0.45 | C005YJR45_BSTR | Z, P, Q, A | J | 16 |
| 0.50 | C005YJ0R5_BSTR | Z, P, Q, A | J | 16 |
| 0.55 | C005YJR55_BSTR | P, Q, A | J | 16 |
| 0.60 | C005YJ0R6_BSTR | P, Q, A | J | 16 |
| 0.65 | C005YJR65_BSTR | P, Q, A | J | 16 |
| 0.70 | C005YJ0R7_BSTR | P, Q, A | J | 16 |
| 0.75 | C005YJR75_BSTR | P, Q, A | K | 16 |
| 0.80 | C005YK0R8_BSTR | P, Q, A | K | 16 |
| 0.85 | C005YKR85_BSTR | P, Q, A | K | 16 |

| Capacitance [pF] | Part Number | Tolerances Z = ±0.01pF P = ±0.02pF Q = ±0.03pF A = ±0.05pF | TC J = ±30ppm/°C K = ±60ppm/°C | Voltage (V) |
|------------------|----------------|--|--------------------------------------|-------------|
| 0.90 | C005YK0R9_BSTR | P, Q, A | K | 16 |
| 0.95 | C005YKR95_BSTR | P, Q, A | K | 16 |
| 1.00 | C005YK1R0_BSTR | P, Q, A | K | 16 |
| 1.10 | C005YK1R1_BSTR | P, Q, A | K | 16 |
| 1.20 | C005YK1R2_BSTR | P, Q, A | K | 16 |
| 1.30 | C005YK1R3_BSTR | P, Q, A | K | 16 |
| 1.40 | C005YK1R4_BSTR | P, Q, A | K | 16 |
| 1.50 | C005YK1R5_BSTR | P, Q, A | K | 16 |
| 1.60 | C005YK1R6_BSTR | P, Q, A | K | 16 |
| 1.70 | C005YK1R7_BSTR | P, Q, A | K | 16 |
| 1.80 | C005YK1R8_BSTR | P, Q, A | K | 16 |
| 1.90 | C005YK1R9_BSTR | P, Q, A | K | 16 |
| 2.00 | C005YK2R0_BSTR | P, Q, A | K | 16 |
| 2.10 | C005YK2R1_BSTR | P, Q, A | K | 16 |
| 2.20 | C005YK2R2_BSTR | P, Q, A | K | 16 |
| 2.30 | C005YK2R3_BSTR | P, Q, A | K | 16 |
| 2.40 | C005YK2R4_BSTR | P, Q, A | K | 16 |


Intermediate capacitance values are available

DIMENSIONS - mm (inches)

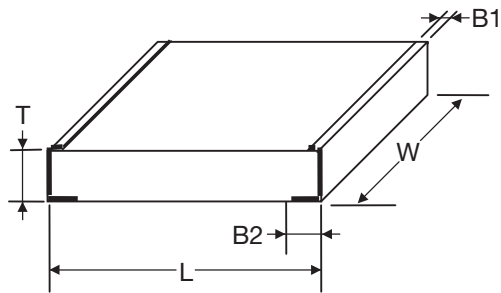

| | |
|----------|---|
| L | 0.405 ± 0.020 (0.016 ± 0.001) |
| W | 0.215 ± 0.020 (0.0085 ± 0.001) |
| T | 0.145 ± 0.020 (0.006 ± 0.001) |
| B | Top (B1): 0.0 +0.10/-0.0 (0.0 +0.004/-0.0) |
| | Bottom (B2): 0.10 ± 0.03 (0.004 ± 0.001) |

RECOMMENDED PAD LAYOUT - mm (inches)

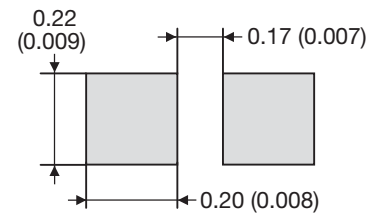

PACKAGING SPECIFICATION - mm (inches)

Standard Packaging: 5,000 / 10,000 / 20,000pcs in 4" / 7" reels

Materials: Reel – Polystyrene

Tape – Paper: 8.00 (0.315)

Component pitch: 2.00 (0.079)

