
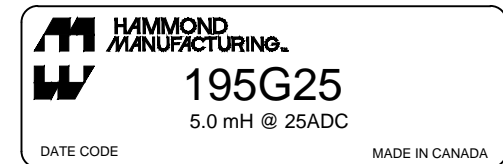
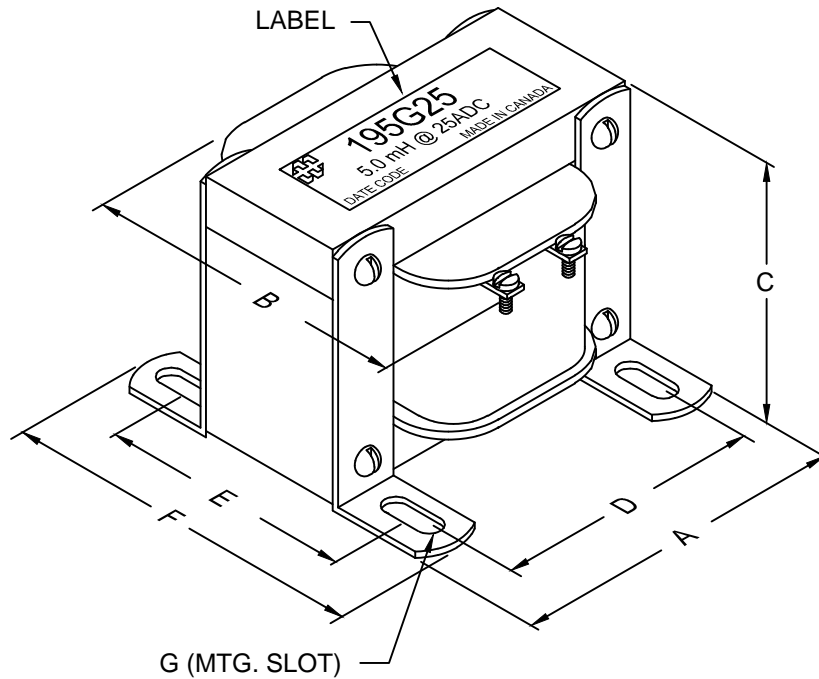


# DIMENSIONS:

A	5.25" ±0.063
B	6.00" MAX.
C	4.435" ±0.063
D	4.375" ±0.063
E	3.625" ±0.063
F	4.75" ±0.063
G	0.281" X 0.563" ±0.015

# SCHEMATIC



# ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 5V, 60Hz,	1.91 - 2.58A
Inductance	@ 25ADC =	5.0mH ± 15%
DCR	@ 20°C, LUG - LUG =	0.014 Ω ±20%
	OPERATING VOLTAGE	750 VAC max.
	OPERATING VOLTAGE	600 VDC max.
	OPERATING TEMPERATURE	CLASS B 130°C
HIPOT	PRMARY - CORE	2500V, 60Hz, 1 SEC
WEIGHT		18 LBS.

# PROPERTY AND COPYRIGHT NOTICE

THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	11/25/2013	52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. BACIK	CHK'D BY:	TITLE: HIGH CURRENT	DWG. NO.
			DATE: 11/25/2013	APP'D. BY:	INDUCTOR	195G25
				DIMENSIONS: IN(X) MM( )		