

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1704805022](#)  
**Status:** **Active**  
**Overview:** [Impact™ Backplane Connector and Cable Assembly System](#)  
**Description:** [Impact™ 85 Ohm Plus 5 Pair Right Angle Daughtercard, Right Guided, 12 Columns, 180 Circuits, Plated Through Hole Dimension 0.39mm, Lead Free](#)

**Documents:**

[3D Model](#) [Application Specification AS-76060-990-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-170540-999-001 \(PDF\)](#)

**Agency Certification**


UL E29179

**General**

Product Family [Backplane Connectors](#)  
Series [170480](#)  
Application [Conventional, Daughtercard](#)  
Application Tooling Documents [TM-622018799](#)  
Component Type [PCB Receptacle](#)  
Overview [Impact™ Backplane Connector and Cable Assembly System](#)  
Product Name [Impact™](#)  
UPC [884982710887](#)

**Physical**

Circuits (Loaded) 180  
Circuits (maximum) 180  
Color - Resin Gray  
Durability (mating cycles max) 200  
First Mate / Last Break No  
Flammability 94V-0  
Guide to Mating Part Yes  
Keying to Mating Part None  
Material - Metal High Performance Alloy (HPA)  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Net Weight 27.743/g  
Number of Columns 12  
Number of Pairs 5  
Number of Rows 15  
Orientation Right Angle  
PC Tail Length 1.20mm  
PCB Locator No  
PCB Retention None  
PCB Thickness - Recommended 1.00mm  
Packaging Type Tray  
Pitch - Mating Interface 1.35mm, 1.90mm  
Pitch - Termination Interface 1.35mm, 1.90mm  
Plating min - Mating 0.762µm  
Polarized to PCB No  
Stackable No  
Surface Mount Compatible (SMC) No  
Temperature Range - Operating -55°C to +85°C  
Termination Interface: Style Through Hole - Compliant Pin

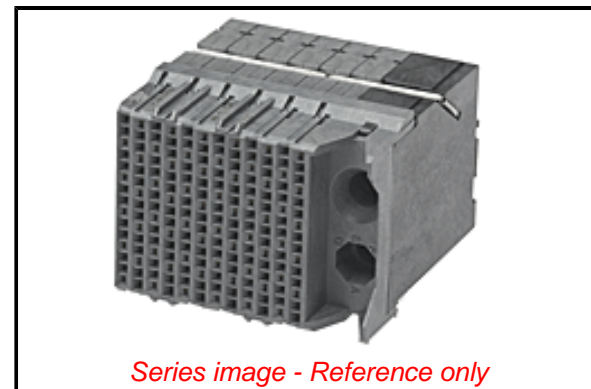

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/21/2016 (20 June  
2016)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[170480](#) Series

**Mates With**

[170475](#) Impact™ 85 Ohm Plus Vertical Header

**Electrical**

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	85Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

**Solder Process Data**

Lead-free Process Capability	N/A
------------------------------	-----

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-76060-990-001
Electrical Model Document	EE-170480-0001
Product Specification	PS-170540-999-001
S-Parameter Model	SP-170480-0003
Sales Drawing	SD-170480-0004
Symbol/Footprint Data	SYM-170480-5022

This document was generated on 01/17/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[170480-5022](#)