

# Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing D7, for single locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, height: 52.8 mm, cable gland: none, gland: Yes, 1x M20, Standard



## Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4055626159683

## Technical data

### Dimensions

Height	52.8 mm
Width	40.7 mm
Length	26.9 mm

### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 125 °C

### General

Note	for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12
Size	D7
Housing type	Sleeve housing
Color	gray aluminum
Locking type	for single locking latch
No. of cable outlets	1
Cable outlet	lateral
Screw connection	none

# Housing - HC-STA-D07-HHFS-1STM20-EL-AL - 1419235

## Technical data

### General


Type of the screw connection	1x M20
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated

### Standards and Regulations

Note	for contact inserts HC-A03, A04, D07, D08, Q02, Q03, Q04, Q05, Q07, Q12
------	---

## Drawings

Dimensional drawing

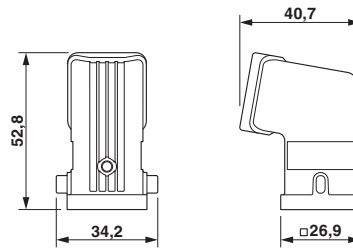

## Approvals

### Approvals

Approvals

EAC / EAC / GL

Ex Approvals

### Approval details

EAC		EAC-Zulassung
-----	--	---------------

EAC		RU C- DE.AI30.B.01102
-----	--	--------------------------

GL		<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	6196614 HH
----	--	---	------------

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>