

V-EA-Series - UL508 Manual Motor Controller - 1 pole E-Trip



UL508 Listed
E137938



One Pole

Standard Pack: 12



Weight:

0.3A - 32A

1.68kg (3.7 lb.)

40A - 63A


1.92kg (4.23 lb.)




For ring tongue terminal version, replace "U" with "R" in part number. For example 1BR20 instead of 1BU20.

Rated Current	Type/ Cat. No.	Approvals
0.3A	1EU03	UL SF
0.5A	1EU05	UL SF
0.75A	1EU075	UL SF
0.8A	NA	
1.0A	1EU1	UL SF
1.6A	1EU1.6	UL SF
2.0A	1EU2	UL SF
2.5A	1EU2.5	UL SF
3.0A	1EU3	UL SF
3.5A	1EU3.5	UL SF
4.0A	1EU4	UL SF
5.0A	1EU5	UL SF
6.0A	1EU6	UL SF
8.0A	1EU8	UL SF
10A	1EU10	UL SF
12A	1EU12	UL SF
12.5A	1EU125	UL SF
13A	1EU13	UL SF
15A	1EU15	UL SF
16A	1EU16	UL SF
20A	1EU20	UL SF
25A	1EU25	UL SF
30A	1EU30	UL SF
32A	1EU32	UL SF
40A	1EU40	UL SF
50A	1EU50	UL SF
60A	1EU60	UL SF
63A	1EU63	UL SF

V-EA-E Trip
0.3A Through 10A Rated Current

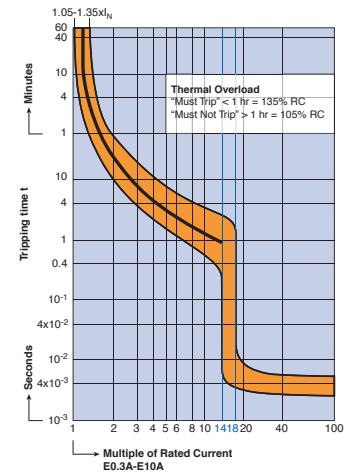

V-EA-E Trip
12A Through 60A Rated Current

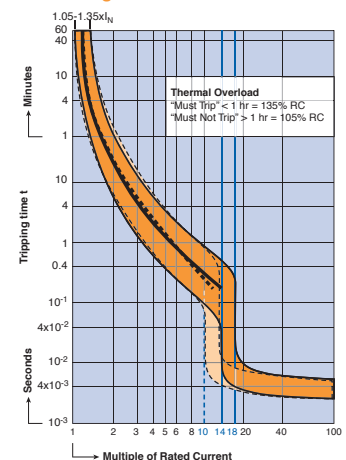

Voltage Rating	277VAC 0.3-25A: 1 pole - 42VDC 30-60A: 1 pole - 24VDC
Short Circuit Withstand Rating (UL/CSA - Ratings)	0.3-60A (RC): 10kA with UL-listed RK5 back-up fuse or MCCB
Group Short Circuit Withstand Rating (UL/CSA - Ratings)	0.3-10A (RC): 10kA; 12-60A (RC): 5kA no branch circuit protection required
Interrupting Capacity (VDE - Ratings)	0.3-63A (RC): 10kA
Calibration Temperature	40°C (104°F)
Terminal Size Acceptability	Top: 18-3 AWG; Bottom: 18-2 AWG
Terminal Torque	20 lb.in.
Terminal Protection Degree	IP20

SHORT CIRCUIT WITHSTAND RATINGS FOR V-EA MANUAL MOTOR CONTROLLER

Trip Curve	Amp Range	Backup Protection	UL-Listed RK5-Fuse up to 10kA	UL-Listed MCCB up to 10kA	No BCP Required up to:
all	0.3 - 10A		4xRC* min 15A, max 70A	4xRC* min 15A, max 70A	10kA
all	12 - 30/32A		4xRC* max 125A	4xRC* max 125A	5kA
all	40 - 50A		4xRC* max 200A	4xRC* max 200A	5kA
all	60 / 63A		4xRC* max 250A	4xRC* max 250A	5kA

*up to nearest rated current