



SECTION A-A
CONDUCTOR WINGS

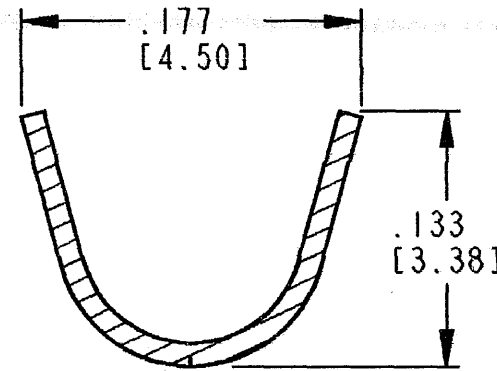

SECTION B-B
INSULATION WINGS

REV
G 1060-16-01 **

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
D	REVISED PER E.O. A14783	01-17-95	R.D.R.
E	REDESIGNED/REDRAWN PER E.O. P16391	11-05-99	R.D.R.
F	REVISED PER E.O. P16998	12-08-00	R.D.R.
G	REVISED PER E.O. P19555	7-11-07	RDR

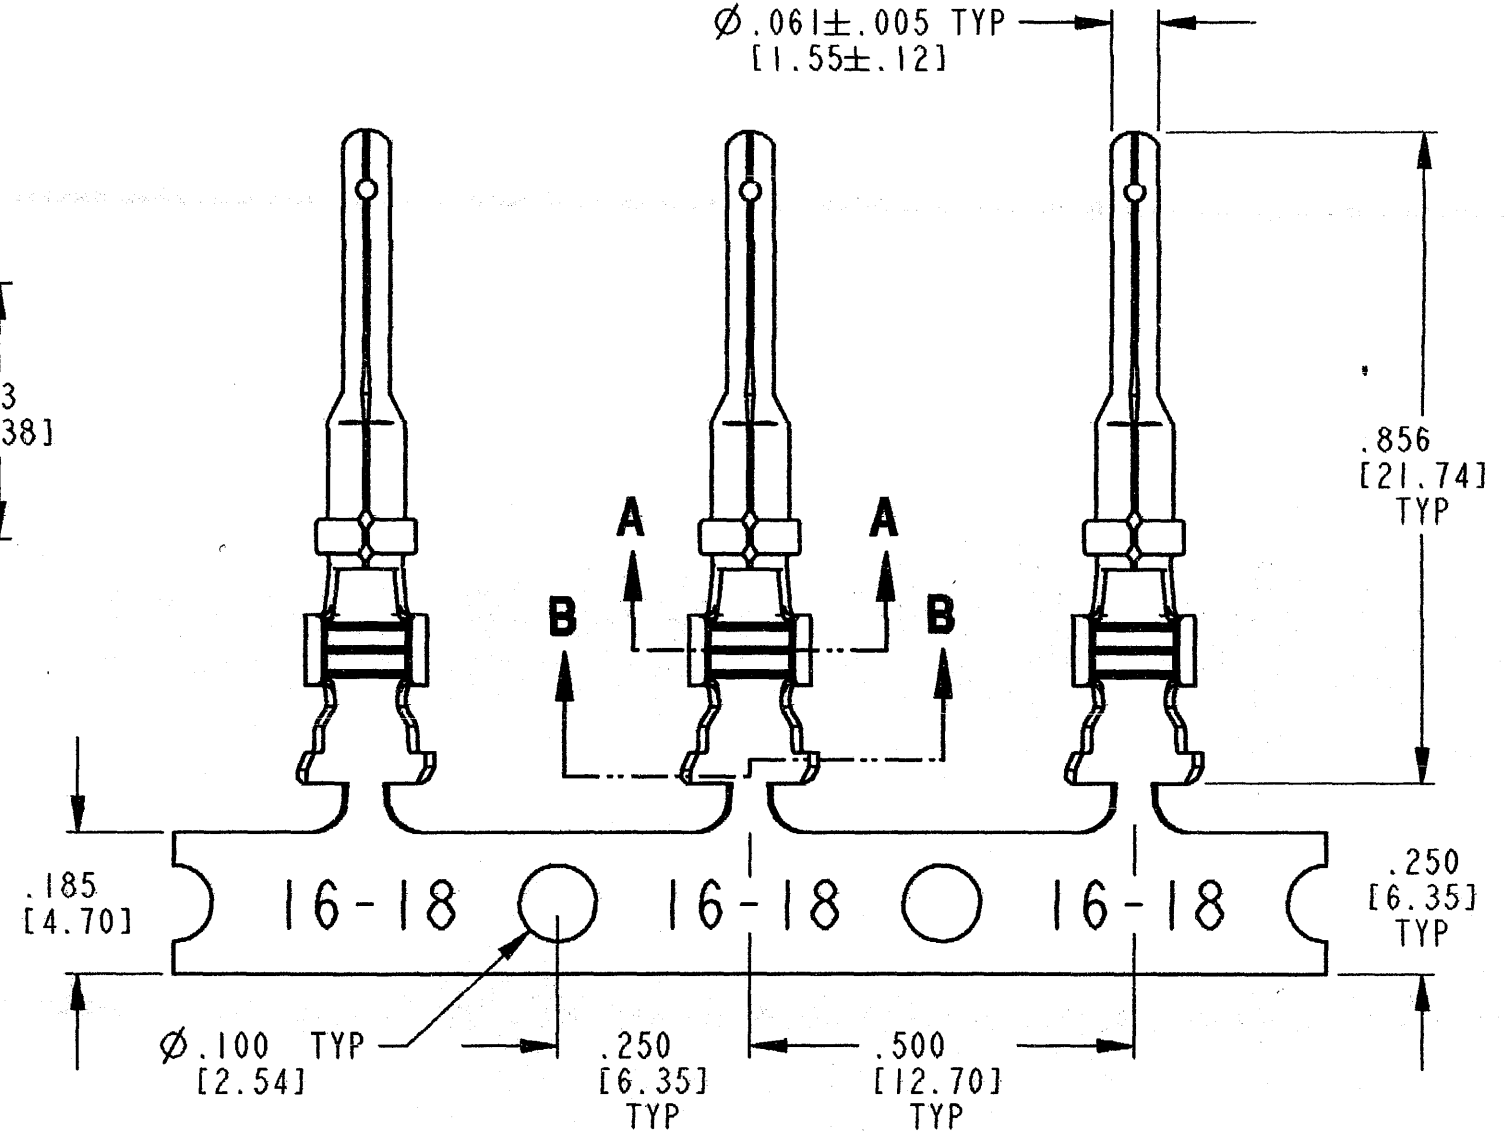

7. CONTACT MATERIAL CONTAINS 98% COPPER MINIMUM.
6. WHEN ** = 22 PLATING IS NICKEL.
** = 44 PLATING IS GOLD.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT16-02-00 AUTOMATIC DIE, DTT-16-00 OR DTT-16-01 HAND TOOLS. SEE DRAWING 0425-203-0000 FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE, AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
2. DIMENSIONAL TOLERANCE: ±.025 [0.63].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	M. BLUM 11/04/99
CHK	B. Byrd 7/11/07
PE	D. Meyer 7/10/07
APPD	R. Reid 7-11-07
SCALE	NONE WT

**STAMPED CONTACT
PIN
SIZE 16**

ENVELOPE

EP	MATL. CODE
The Deutch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
B	1060-16-01 **
DWG SIZE	CODE 11139 SHEET OF