
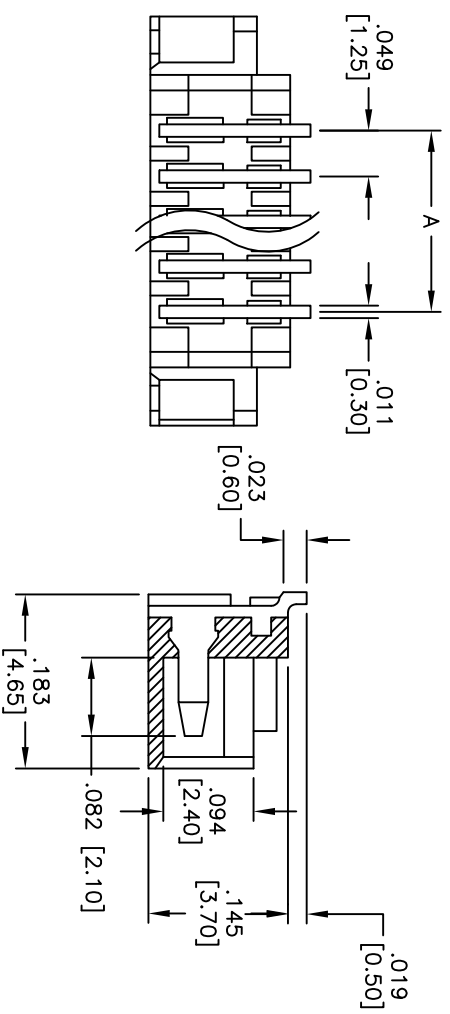
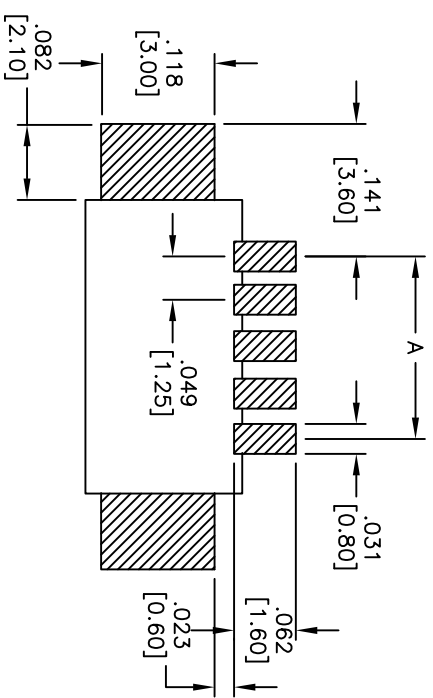


Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	

APPROVED: _____
 DATE: _____ TITLE: _____

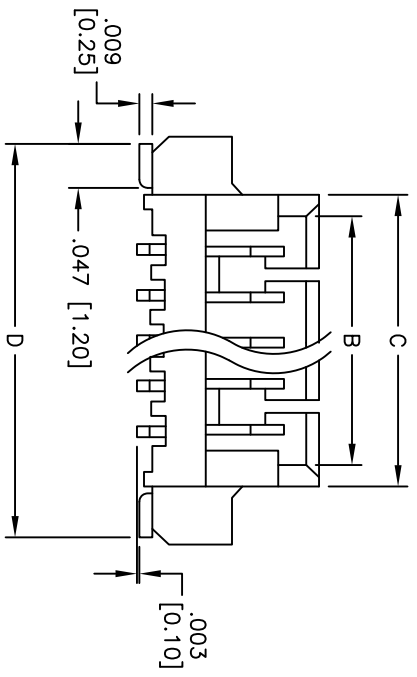

A = .049 [1.25] X NO. OF SPACES
 B = .049 [1.25] X NO. OF SPACES X + .070 [1.80]
 C = .049 [1.25] X NO. OF SPACES X + .118 [3.00]
 D = .049 [1.25] X NO. OF SPACES X + .259 [6.60]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

PACKAGING: SUPPLIED ON TAPE & REEL



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER 180° SMT
 TAPE AND REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	BW	01/17/07	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	SHEET 1 OF 1
X	125SH-B-XX-TS-SMT-T/R	NTS	
REV.			