

# Housing - HC-STA-B10-BWSC-ELC-AL - 1411321

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON panel mounting base, B10, with single locking latch, with plastic protective cover, with flat gasket, salt-water-resistant aluminum, conductive profile gasket.



## Key commercial data

Packing unit	1 pc
GTIN	 4 046356 927222
Weight per Piece (excluding packing)	22.22 g
Custom tariff number	85389099
Country of origin	China

## Technical data

### Dimensions

Height	30.5 mm
Width	53 mm
Length	93.5 mm
Length of the assembly cutout	65 mm
Width of the assembly cutout	35 mm

### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP69K (ISO 20653:2013-02)
Degree of protection of housing (NEMA)	4
	4X
	12
Ambient temperature (operation)	-40 °C ... 125 °C

### General

# Housing - HC-STA-B10-BWSC-ELC-AL - 1411321

## Technical data

### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Type	B10
Housing type	Panel mounting base
Locking type	With single locking latch
Torque	1.5 Nm ... 2 Nm (Mounting screw)
Screw connection	none
Protective cover	Yes
Housing material	Die-cast aluminum, corrosion resistant
Housing surface material	Uncoated
Material lock	Polyamide
Material, protective cover	Polyamide

## Classifications

### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202

### ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

## Approvals

### Approvals

---

Approvals

EAC / GL

---

Ex Approvals

---

Approvals submitted

---

### Approval details

EAC
-----


# Housing - HC-STA-B10-BWSC-ELC-AL - 1411321

## Approvals

GL


## Drawings

Dimensioned drawing

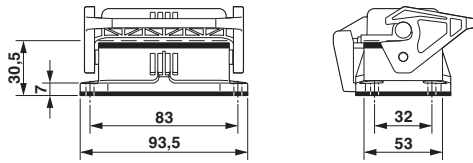

Dimensional drawing

Dimensioned drawing



Panel cutout