
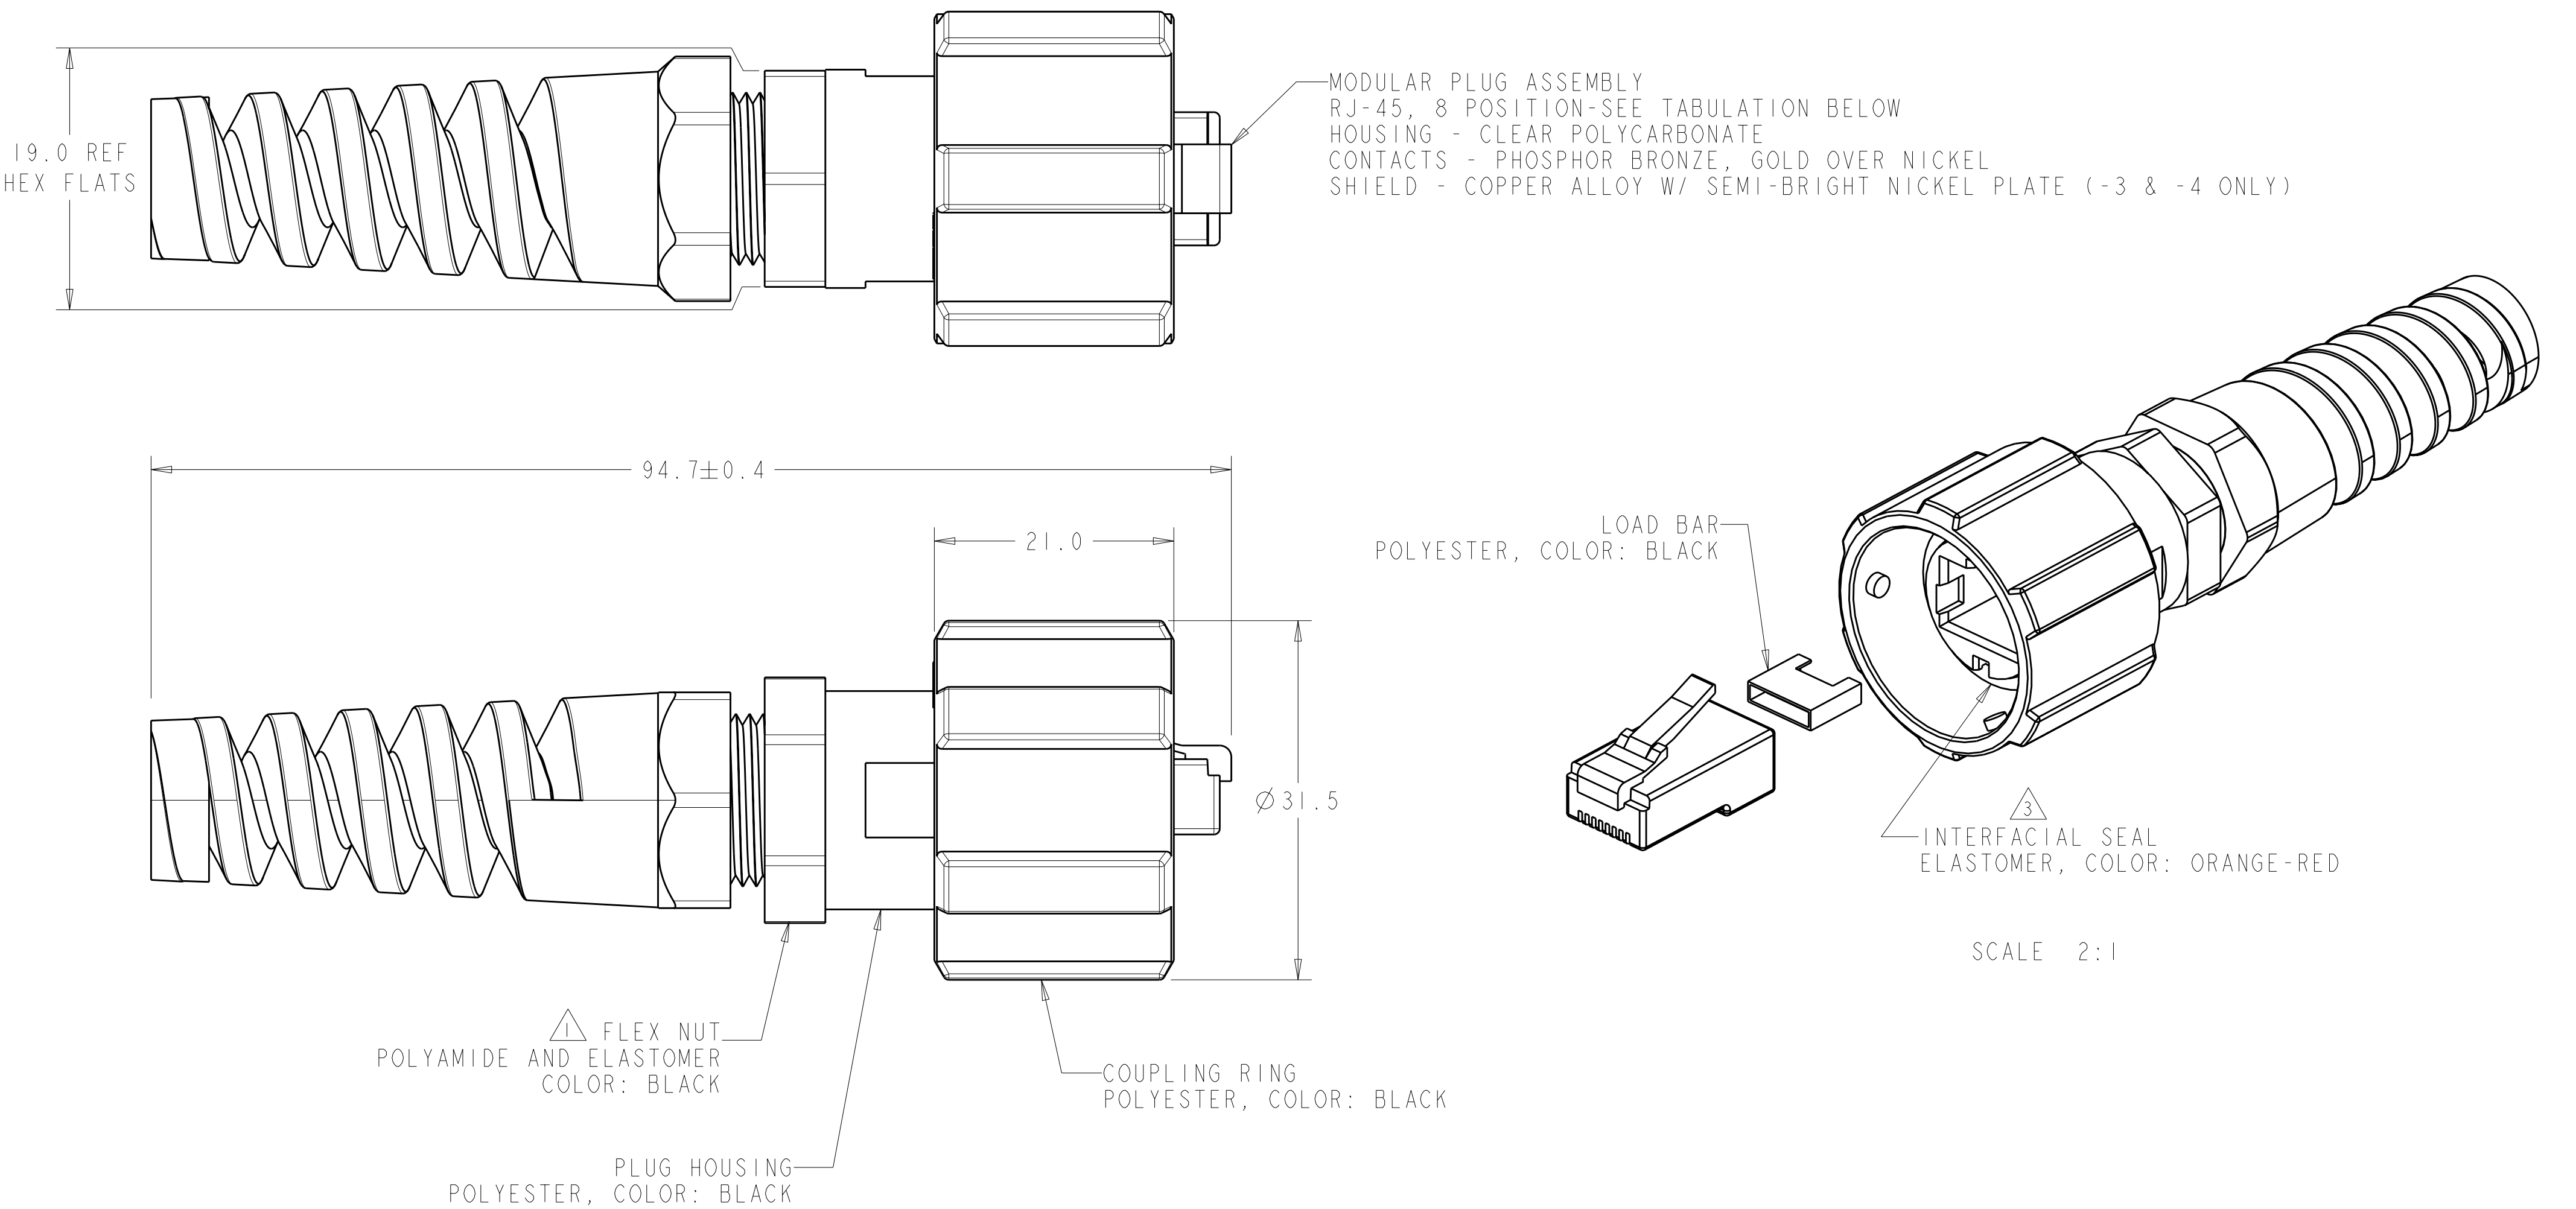




- 1 CABLE DIAMETER RANGE, 4.9 mm TO 7.9 mm, CABLE FITTING ONLY, SEE APPLICATION SPECIFICATION FOR PLUG TERMINATION INFORMATION
2. PARTS PACKAGED UNASSEMBLED IN POLYBAG.
- 3 ELASTOMER SEAL IS SECURED TO HOUSING WITH ADHESIVE.

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

UNSHIELDED		24 AWG STRANDED		1986456-2	
		24 AWG SOLID		1986456-1	
DESCRIPTION		CONDUCTOR TYPE		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.						DWN S. SCHLEGEL 25JUL2008		Tyco Electronics Harrisburg, PA 17105-3608			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.2 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		CHK M. STRECKEWALD 25JUL2008		NAME PLUG ASSEMBLY, FLEX NUT INDUSTRIAL CIRCULAR ETHERNET CONNECTOR					
				APVD M. STRECKEWALD 25JUL2008							
		PRODUCT SPEC 108-2198		SIZE A2		CAGE CODE 00779		DRAWING NO 1986456		RESTRICTED TO -	
		APPLICATION SPEC 114-13136									
		WEIGHT -									
MATERIAL -		CUSTOMER DRAWING		SCALE 5:2		SHEET 1		OF 1		REV -	