
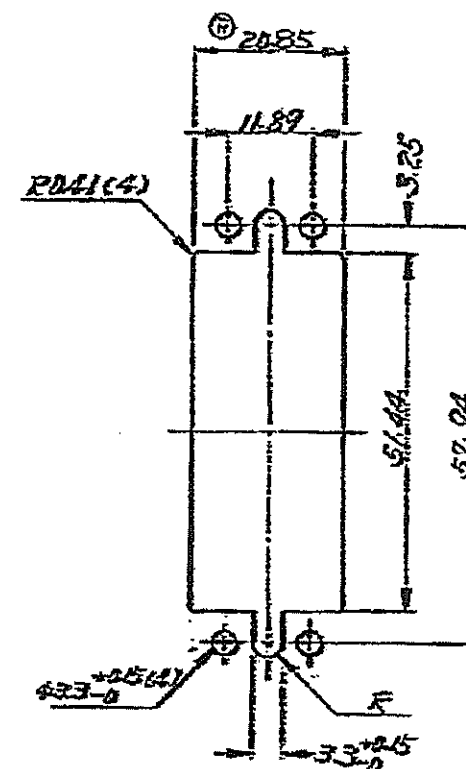
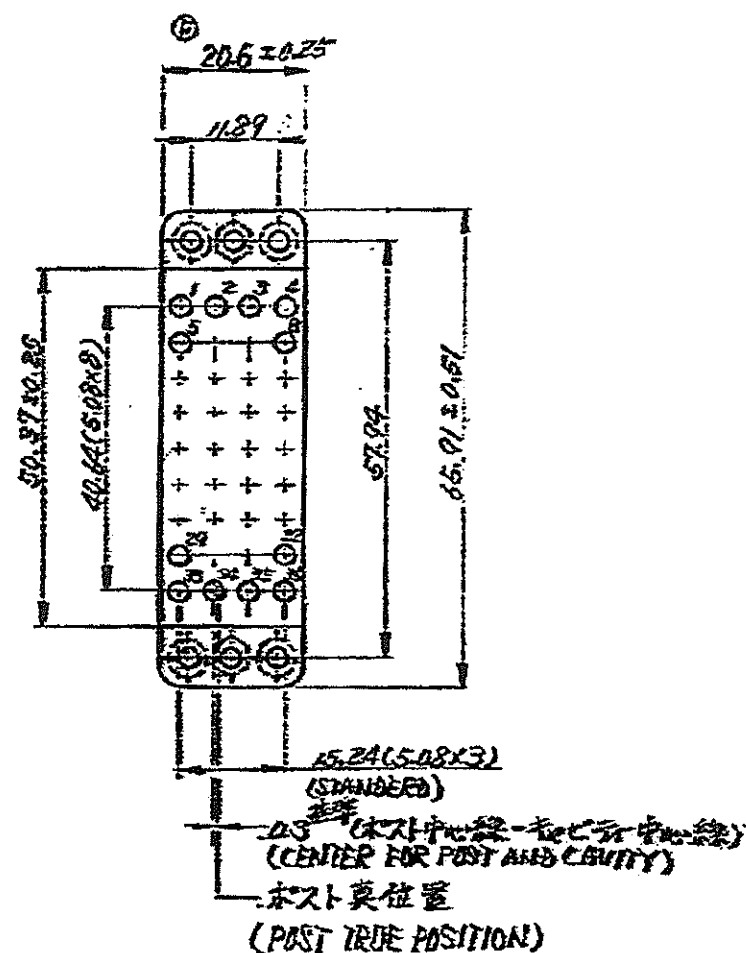


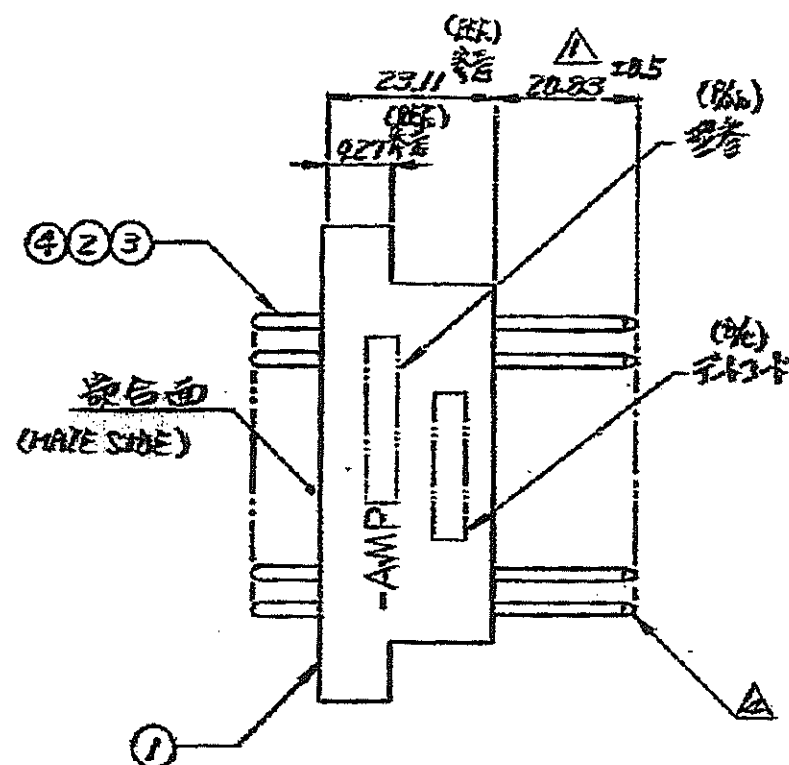

早期文明圖
(PANEL CUT ORIENTATION)

注:

- ① ポスト長さは子機のラッピング(給線)可能 (POST LENGTH HOSTはWRAPPING)
2. 嵌合相手ロット番号 203956-2 (EACH OTHER P/N 203956-2)
⑤ P/F ③④: ニッケル下地部分金めっき残金 プラッシュ
(NICKEL ALL OVER FINISH AFTER PL)
P/F ②: 光沢磨き
(BRIGHT TURN-PL)
④. アンテナポストの中心線はポスト真位置を中心
とする30mmの円内に入ること
(FAST CENTER HOST POST TRUE POSITION 50mm MAX)
5. ラッピング給線 — 1本2本最大
(CABLE FOR WRAPPING: 1本2本 MAX)

F1	P/N OBSOLETE	ECR-07-002693	Y.Y	D.M	1Feb 2007
F	改定 (FJ00-A246-93)	Y.T	SM	1/28	
E	ADDED: -3 J-12127	SHANE	1/26		
D	CORRECTED (REV C) ^{FILE}	SHANE	1/27		
C	REVISED (REV C) ^{FILE}	1/28	1/28		
B	REVISED (REV C) ^{FILE}	1/28	1/28		
A	REVISED (REV C) ^{FILE}	1/28	1/28		
O	REMOVED	1/28	1/28		

OBSOLETE		OBSOLETE													
36	4	4	171804-3	0.8	POST PIN CONT.										
4	36	36	171804-1	0.8	POST PIN CONT.										
4	36	4	171804-2	0.8	POST PIN CONT.										
1	1	1	205076-3	36	POST PIN CONT.										
3	2	1	型番 (P/N)	名	称 (NAME)	材料	及	仕	上 (MATERIAL & FINISH)	ITEM	AND				
MATERIALS (SEE TABLE) 表参照				TOLERANCE EXCEPT AS NOTED		tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan							
FINISH (SEE TABLE) 表参照				GR C DE CPR		SIZE A3		TYPE H 36 PIN CONNECTOR M31-2 36 極 コネクター 0.8 POST 94 (P) = 97 (T) プラチニウム C-171744							
				SCALE 1-1		REL F1		SHEET 1-1							

(CUSTOMER DRAWING)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[171744-3](#)