
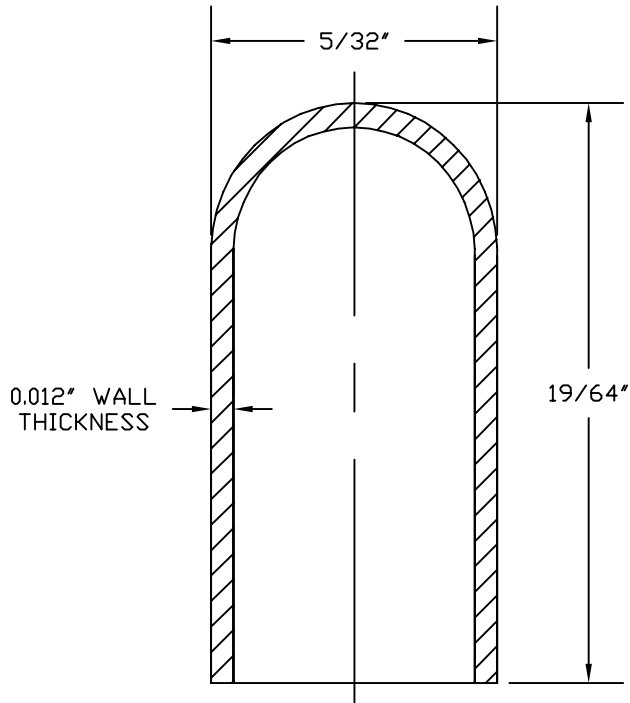


SPECIFICATIONS		
	GRADE	
SILIKROME®	COMMERCIAL	MILITARY
Material	Silicone Rubber ASTM D 1418	Silicone Rubber conforming to A-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

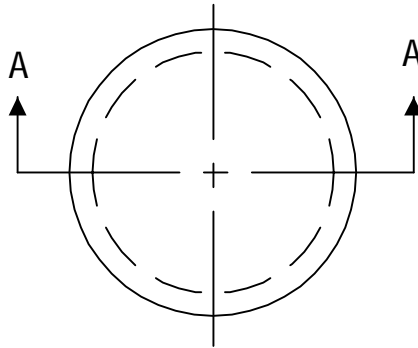

SECTION AA

B	REDRAWN and MAT'L CHANGED	S. GOK	05.28.09
A	CAD COMPUTER GENERATED		01.10.03
REV.	DESCRIPTION	ENG.	DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-1 LAMPS	S. GOK	05.28.09
		DWN. N.K.S.	06.04.65
		CHKD. J. CELLA	05.28.09
MAT'L: SEE ABOVE	APM-HEXSEAL CORPORATION	SCALE	1813/22
COLOR: SPECIFY		10 : 1	
		DWG. NO.	

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

APM HEXSEAL:

[1813/22](#) [1813/22R5](#) [1813/22LW19-4](#) [1813/22 A2 C](#) [1813/22 B1 C](#) [1813/22 G1 C](#) [1813/22 G1-12 C](#) [1813/22 LW1](#)
[C](#) [1813/22 R2 C](#) [1813/22 Y1 C](#)