


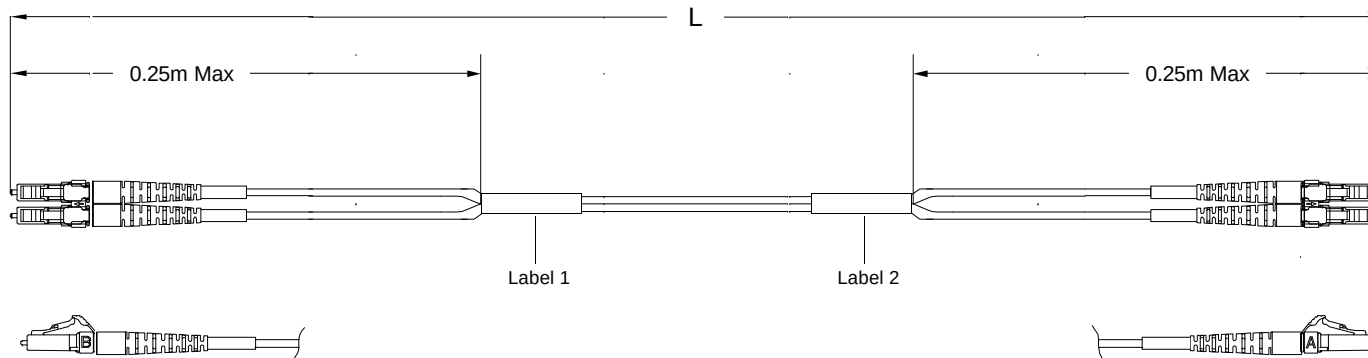

Left Side
Connector(s): LC-Duplex Secure
Mode: MM
Housing Color: Aqua
Geom. Spec: N/A

Fiber Path

A - _____ - B
B - _____ - A

Right Side
Connector(s): LC-Duplex
Mode: MM
Housing Color: Beige
Geom. Spec: N/A

Notes:

- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
- 2 Includes dust caps (not shown on print).
- 3 IL tested at 1300nm.
- 4 Label 2 will not be present on any cable assembly less than 5 meters long.

	A	Rev Per EC#	RELEASE	12/7/2007	-	JD			
P	LTR	REVISION	RECORD	DATE	DN	APVD			

DIMENSIONS:
meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P.L.C. ± .
1 P.L.C. ± .
2 P.L.C. ± .
3 P.L.C. ± .
4 P.L.C. ± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT
OK	Jeremy Duncan		
APVD	Jeremy Duncan		
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1906098	1 of 4
			REV A

AMP Tyco Electronics, Inc.
Harrisburg, PA 17105-3608

LOC
CE
DIST
16

CAC Customer Layout Rev: D

	A	Rev Per EC#	RELEASE	12/7/2007	-	JL	
P	LTR		REVISION RECORD	DATE	DIN	AP	

Qty	U of M	Description	Item No
2	piece	Trace Label	7
4	piece	Eyelet/Shrink tube assembly - White	6
AR	meter	2 Fiber, XG-50/125, 2.0mm, Twinzip, Aqua, OFNR (Riser)	5
2	piece	LC Connector Assy, 1.6mm-2.0mm, MM	4
2	piece	LC Connector Assy, MM	3
2	piece	LC Duplex clip, black	2
4	piece	LC. SC. FC Straight Boot. Beige	1

DIMENSIONS;
meters



TOLERANCES UNLESS OTHERWISE SPECIFIED		
0 PLC	$\pm$	-
1 PLC	$\pm$	-
2 PLC	$\pm$	-
3 PLC	$\pm$	-
4 PLC	$\pm$	-

Restricted To:

WIN Cable Assy Configurator OK Jeremy Duncan		MATERIAL - HEAT TREAT -
APVD Jeremy Duncan		 Tyco Electronics, Inc. Harrisburg, PA 17105-3608
NAME FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE NTS SIZE A2	DRAWING NO. C- 1906098	SHEET 2 of 4 REV A

THIS DRAWING IS A CONTROLLED DOCUMENT

DWG NO

CAC Customer Layout Rev: D

	A	Rev Per EC#	RELEASE	12/7/2007	-
P	LTR	REVISION RECORD		DATE	DIN

DIMENSIONS; meters		TOLERANCES UNLESS OTHERWISE SPECIFIED	
	0 PLC	±	-
	1 PLC	±	-
	2 PLC	±	-
	3 PLC	±	-
	4 PLC	±	-

USED ON	
---------	--

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT MAY NOT BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

THIS DRAWING IS A CONTROLLED DOCUMENT.

LOC
CE
DIST
16

CAC Customer Layout Rev: D

8

7

6

5

4

3

2

1

Label 1

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code

Trace # - Human Readable

Part Number

Country of Origin

This label is used on all lengths on this drawing.

DIMENSIONS:	
meters	

TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 P.L.C.	± .
1 P.L.C.	± .
2 P.L.C.	± .
3 P.L.C.	± .
4 P.L.C.	± .

Restricted To:

DIN Cable Assy Configurator		MATERIAL	HEAT TREAT	
CHK	Jeremy Duncan	-	-	
APVD	Jeremy Duncan	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex			
SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1906098	4 of 4	A

D

C

B

A