


Restricted to: General Release


USED ON

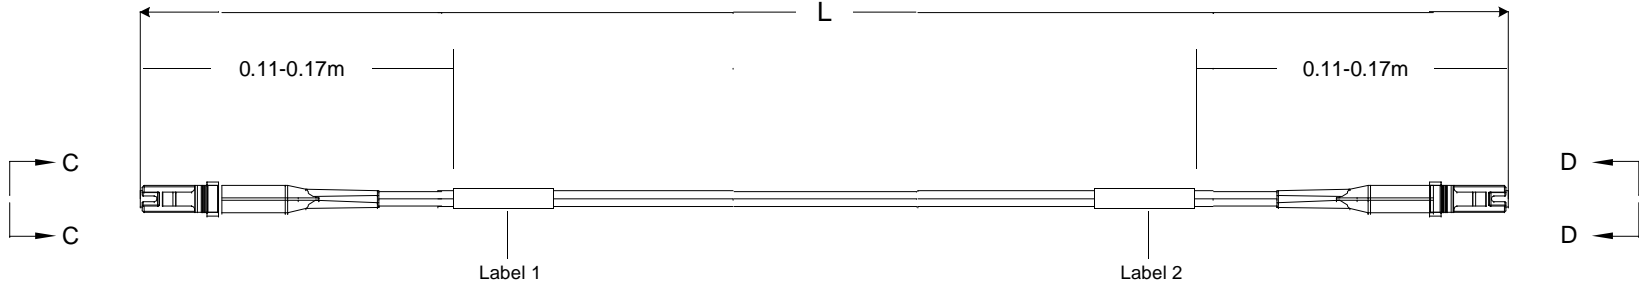

THIS DRAWING IS A CONTROLLED DOCUMENT
928281

Left Side

Connector(s): MT-RJ (No Pins)
Mode: MM
Housing Color: Black
Geom. Spec: 115-1215



Fiber Path


Fiber A - - Fiber B
Fiber B - - Fiber A

Notes:

- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
- 2 Label 2 will not be present on any cable assembly less than 5 meters long.
- 3 Includes dust caps (not shown on print).

Right Side

Connector(s): MT-RJ SECURE (No Pins)
Mode: MM
Housing Color: Brown
Geom. Spec: 115-1215



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS TO BE USED ONLY BY THOSE EMPLOYEES OF TYCO ELECTRONICS, INC. WHO HAVE BEEN GRANTED ACCESS TO THIS INFORMATION. IT IS NOT TO BE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

B	Rev Per EC#	ECR-06-020123	8/21/2006	-	MK		
P	LTR	REVISION RECORD	DATE	DN	APVD		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
meters	0 PLC ± .
	1 PLC ± .
	2 PLC ± .
	3 PLC ± .
	4 PLC ± .

Customer Print

DWG	Cable Assy Configurator	MATERIAL	HEAT TREAT
CHK	Michael Kepko		
APVD	Michael Kepko	Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, MT-RJ (No Pins) to MT-RJ SECURE (No Pins)		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1828264	1 of 3
			REV B

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

Restricted to: General Release

USED ON

THIS DRAWING IS A CONTROLLED DOCUMENT.


Part #	L (meters)	L (feet)	MT-RJ (No Pins), Black		MT-RJ SECURE (No Pins), Brown	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-1828264-1	0.950 - 1.050	3.11 - 3.44	0.5	20	0.5	20
0-1828264-2	1.950 - 2.050	6.39 - 6.72	0.5	20	0.5	20
0-1828264-3	2.950 - 3.050	9.67 - 10.00	0.5	20	0.5	20
0-1828264-4	3.920 - 4.080	12.86 - 13.38	0.51	20	0.51	20
0-1828264-5	4.920 - 5.080	16.14 - 16.66	0.51	20	0.51	20
0-1828264-6	5.920 - 6.080	19.42 - 19.94	0.51	20	0.51	20
0-1828264-7	6.920 - 7.080	22.70 - 23.22	0.51	20	0.51	20
0-1828264-8	7.920 - 8.080	25.98 - 26.50	0.51	20	0.51	20
0-1828264-9	8.850 - 9.150	29.03 - 30.01	0.51	20	0.51	20
1-1828264-0	9.850 - 10.150	32.31 - 33.30	0.52	20	0.52	20
1-1828264-1	10.850 - 11.150	35.59 - 36.58	0.52	20	0.52	20
1-1828264-2	11.850 - 12.150	38.87 - 39.86	0.52	20	0.52	20
1-1828264-3	12.850 - 13.150	42.15 - 43.14	0.52	20	0.52	20
1-1828264-4	13.850 - 14.150	45.43 - 46.42	0.52	20	0.52	20
1-1828264-5	14.850 - 15.150	48.72 - 49.70	0.52	20	0.52	20
1-1828264-6	15.840 - 16.160	51.96 - 53.01	0.52	20	0.52	20
1-1828264-7	16.830 - 17.170	55.21 - 56.33	0.53	20	0.53	20
1-1828264-8	17.820 - 18.180	58.46 - 59.64	0.53	20	0.53	20
1-1828264-9	18.810 - 19.190	61.71 - 62.95	0.53	20	0.53	20
2-1828264-0	19.800 - 20.200	64.96 - 66.27	0.53	20	0.53	20
2-1828264-1	20.790 - 21.210	68.20 - 69.58	0.53	20	0.53	20
2-1828264-2	21.780 - 22.220	71.45 - 72.90	0.53	20	0.53	20
2-1828264-3	22.770 - 23.230	74.70 - 76.21	0.53	20	0.53	20
2-1828264-4	23.760 - 24.240	77.95 - 79.52	0.54	20	0.54	20
2-1828264-5	24.750 - 25.250	81.20 - 82.84	0.54	20	0.54	20
2-1828264-6	25.740 - 26.260	84.44 - 86.15	0.54	20	0.54	20
2-1828264-7	26.730 - 27.270	87.69 - 89.46	0.54	20	0.54	20
2-1828264-8	27.720 - 28.280	90.94 - 92.78	0.54	20	0.54	20
2-1828264-9	28.710 - 29.290	94.19 - 96.09	0.54	20	0.54	20
3-1828264-0	29.700 - 30.300	97.44 - 99.40	0.55	20	0.55	20
3-1828264-1	30.690 - 31.310	100.68 - 102.72	0.55	20	0.55	20
3-1828264-2	31.680 - 32.320	103.93 - 106.03	0.55	20	0.55	20
3-1828264-3	32.670 - 33.330	107.18 - 109.35	0.55	20	0.55	20
3-1828264-4	33.660 - 34.340	110.43 - 112.66	0.55	20	0.55	20
3-1828264-5	34.650 - 35.350	113.68 - 115.97	0.55	20	0.55	20
3-1828264-6	35.640 - 36.360	116.92 - 119.29	0.55	20	0.55	20
3-1828264-7	36.630 - 37.370	120.17 - 122.60	0.56	20	0.56	20
3-1828264-8	37.620 - 38.380	123.42 - 125.91	0.56	20	0.56	20
3-1828264-9	38.610 - 39.390	126.67 - 129.23	0.56	20	0.56	20
4-1828264-0	39.600 - 40.400	129.92 - 132.54	0.56	20	0.56	20
5-1828264-0	49.500 - 50.500	162.40 - 165.68	0.58	20	0.58	20

Qty	U of M	Description	Item No.
1	piece	HOUSING, CONN, MT-RJ.BLACK	1
2	piece	DUST COVER, MT-RJ	2
2	piece	SPRING, MT-RJ, 3.8 DESIGN	3
2	piece	PIN KEEPER, 3.8MM	4
2	piece	MT-RJ, SPRING PUSH, UNIVERSAL	5
2	piece	CRIMP EYELET, MT-RJ	6
1	piece	MT-RJ Keyed Connector Housing - Brown	7
2	piece	MT-RJ FERRULE, THERMOPLAST,MM	8
AR	meter	2 fiber, 50/125, 1.8 mm, Twinzip, Orange, OFNR (Riser)	9
2	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	10
2	piece	Trace Label	11

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
CE
DIST
16

Rev Per	EC#	ECR-06-020123	8/21/2006	-	MK
P	LTR	REVISION RECORD	DATE	DN	APVD

DIMENSIONS: meters
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 9 P.L.C. ± .
 1 P.L.C. ± .
 2 P.L.C. ± .
 3 P.L.C. ± .
 4 P.L.C. ± .


DWN Cable Assy Configurator OK Michael Kepko APVD Michael Kepko	MATERIAL - HEAT TREAT - AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608
NAME FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, MT-RJ (No Pins) to MT-RJ SECURE (No Pins)	
SCALE NTS SIZE A2 DRAWING NO C- 1828264	SHEET 2 of 3 REV B

8 7 6 5 4 3 2 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity Divested:](#)

[1490017-1](#)