

Cable connector - CA-17F1N8A8502S - 1619464

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable connector, straight, shielded: yes, SPEEDCON locking, M23, Number of positions: 17, Type of contact: Socket, Crimp connection, Cable diameter: 4 mm ... 6 mm


The figure shows the 12-pos. product version

Why buy this product

- ✓ Safe use in the field, thanks to high degree of protection
- ✓ Connector for flexible on-site assembly
- ✓ Consistent EMC protection for reliable connection solutions in the industrial environment
- ✓ Reduced connection time with SPEEDCON fast locking system
- ✓ Crimping connection: vibration- and temperature-resistant assembly



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 823838
GTIN	4046356823838
Weight per Piece (excluding packing)	100.000 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Temperature range

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Data of the insulating body

Note	Order information: Order crimp contacts Ø 1 mm separately
------	---

Cable connector - CA-17F1N8A8502S - 1619464

Technical data

Data of the insulating body

Coding	N
Insulator material	PA 66
Contact connection method	Crimp connection
Type of contacts	Socket
Number of positions	17
Contact diameter of power contacts	1 mm
Nominal current per power contact at 25°C	8 A
Nominal voltage, power contact	100 V
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing data

Housing material	Metal
Type of locking	SPEEDCON locking
Degree of protection (when plugged in)	IP67
Thread type	M23

Cable seal data

Min. cable diameter	4 mm
Max. cable diameter	6 mm
Sealing material	FPM

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Schematic diagram



Contact chamber numbering (view of plug-in side), standard socket

Dimensional drawing

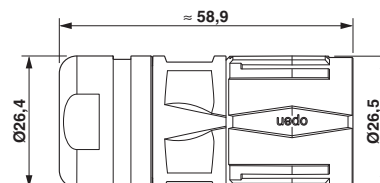

Cable connector - CA-17F1N8A8502S - 1619464

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	272607xx
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440103

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002635
ETIM 5.0	EC002635
ETIM 6.0	EC002635

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	39121413

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Cable connector - CA-17F1N8A8502S - 1619464

Accessories

Accessories

Crimp contact

Crimp contact - SF-6CS2000 - 1605562



Crimp contact, turned, Single contact, Contact diameter: 1 mm, Crimp range: 0.06 mm²...0.25 mm²

Crimp contact - SF-10KS004 - 1607356



Crimp contact, turned, Single contact, Contact diameter: 1 mm, Crimp range: 0.14 mm²...0.5 mm²

Crimp contact - SF-6AS2000 - 1605557



Crimp contact, turned, Single contact, Contact diameter: 1 mm, Crimp range: 0.25 mm²...1 mm²

Crimp contact - SF-10KS320 - 1607031



Crimp contact, Rolled, Taped articles, Number of pieces per reel: 2500, Contact diameter: 1 mm, Crimp range: 0.06 mm²...0.25 mm²

Crimp contact - SF-10KS350 - 1607032



Crimp contact, Rolled, Taped articles, Number of pieces per reel: 2500, Contact diameter: 1 mm, Crimp range: 0.2 mm²...0.56 mm²

Cable connector - CA-17F1N8A8502S - 1619464

Accessories

Crimp contact - SF-10KS330 - 1607358



Crimp contact, Rolled, Taped articles, Number of pieces per reel: 10000, Contact diameter: 1 mm, Crimp range: 0.06 mm²...0.25 mm²

Crimp contact - SF-10KS360 - 1607361



Crimp contact, Rolled, Taped articles, Number of pieces per reel: 10000, Contact diameter: 1 mm, Crimp range: 0.2 mm²...0.56 mm²

Mounting material

Color-coding - RF-Z0014 - 1620588



Color-coding, Color: green

Color-coding - RF-Z0015 - 1620592



Color-coding, Color: orange

Color-coding - RF-Z0016 - 1620593



Color-coding, Color: black

Cable connector - CA-17F1N8A8502S - 1619464

Accessories

Torque screwdriver - SF-Z0028 - 1607456



Torque screwdriver

Hook wrench - SF-Z0027 - 1607455



Hook wrench

Square mounting flange - RF-Z0003 - 1607905



Square mounting flange, Seal, axial, 4xM3, Flange dimensions: 35 mm x 35 mm

Protective cover

Plastic dust protection cap - RC-Z2058 - 1604223



Plastic dust protection cap for connectors with M23 knurled nuts

Plastic anti-static dust protection cap - RC-Z2468 - 1611796



Plastic dust protection cap, anti-static, for connectors with M23 knurled nuts
