

# High Frequency Ceramic Solutions

2.45 GHz Balun / Matching Network : Optimized for TI Chipset CC2520

P/N 2450BM15B0002

Detail Specification: 3/7/2013

Page 1 of 3

## General Specifications

Part Number	2450BM15B0002
Frequency (MHz)	2400 - 2500
Unbalanced Impedance	50 $\Omega$
Differential Balanced Impedance	Conjugate match to TI Chipset 2520
Insertion Loss	1.5 dB max. (-40°C to +85°C)
Insertion Loss	1.7 dB max. (-40°C to +125°C)
Return Loss (-40°C to 125°C)	9.5 dB min.

Differential Mode Attenuation (dB) -40°C to 125°C	12 min. @ 1GHz 18 min. @ 4800~5000MHz 20 min. @ 7200~7500MHz
Phase Diff. (-40°C to 125°C)	180° $\pm$ 15
Input Power	2W max.
Reel Quantity	4,000
Operating Temperature	-40°C to +125°C
Storage Temperature Range	+5 ~ +35 °C, Humidity 45~75%RH, 12 mos. max

## Part Number Explanation



P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BM15B0002S
		T & R	Suffix = E	Eg. 2450BM15B0002E
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 2450BM15B0002(E or S)
		Tin / Lead	Please consult Factory	

## Terminal Configuration

No.	Function
1	Unbalanced Port (2.2nH Ind)*
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND

## Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.028 $\pm$ 0.004	0.70 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 +.004/-.008	0.30 +0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

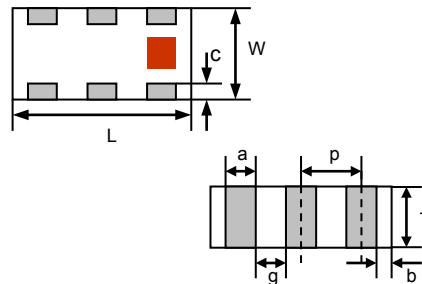

\*2.2 nH Ceramic Chip inductor required on unbalanced port. See page 2 for details

## Mounting Considerations

Mount these devices with brown mark facing up. Units: mm

\* Line width should be designed to provide 50  $\Omega$  impedance matching characteristics.

- Solder Resist
- Land
- Through-hole ( $\phi$ 0.3)

Note: No DC Blocking Capacitor required (internal)

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.1

2012 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

2.45 GHz Balun / Matching Network : Optimized for TI Chipset CC2520

P/N 2450BM15B0002

Detail Specification: 3/7/2013

Page 2 of 3


## Mounting Considerations

Mounting layout for reference only.


Mount device with colored mark facing up.

For detailed dimensions, please contact Johanson Technology or visit TI's CC2520 website:

<http://focus.ti.com/docs/prod/folders/print/cc2520.html>

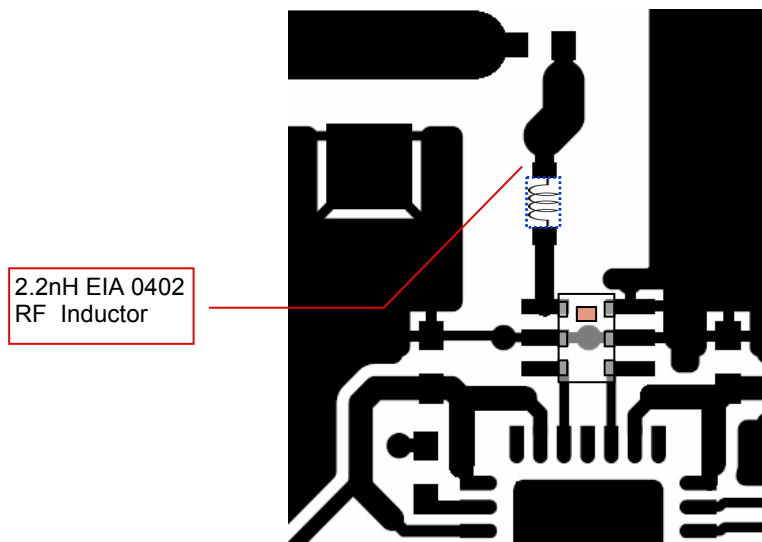

Matching Component P/N:  
2.2nH Inductor: L-07C2N2SV6T  
(Click for Datasheet)

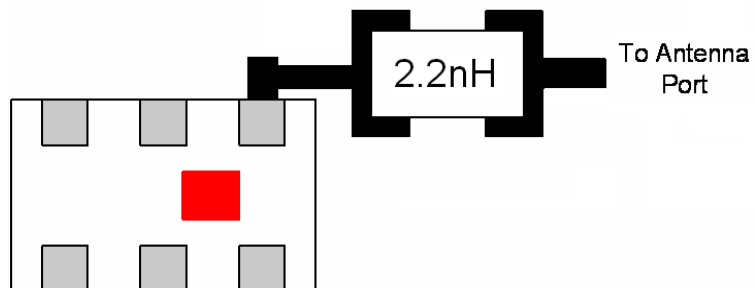

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.

# High Frequency Ceramic Solutions


2.45 GHz Balun / Matching Network : Optimized for TI Chipset CC2520

P/N 2450BM15B0002

Detail Specification: 3/7/2013

Page 3 of 3

## Typical Electrical Performance (T=25°C)

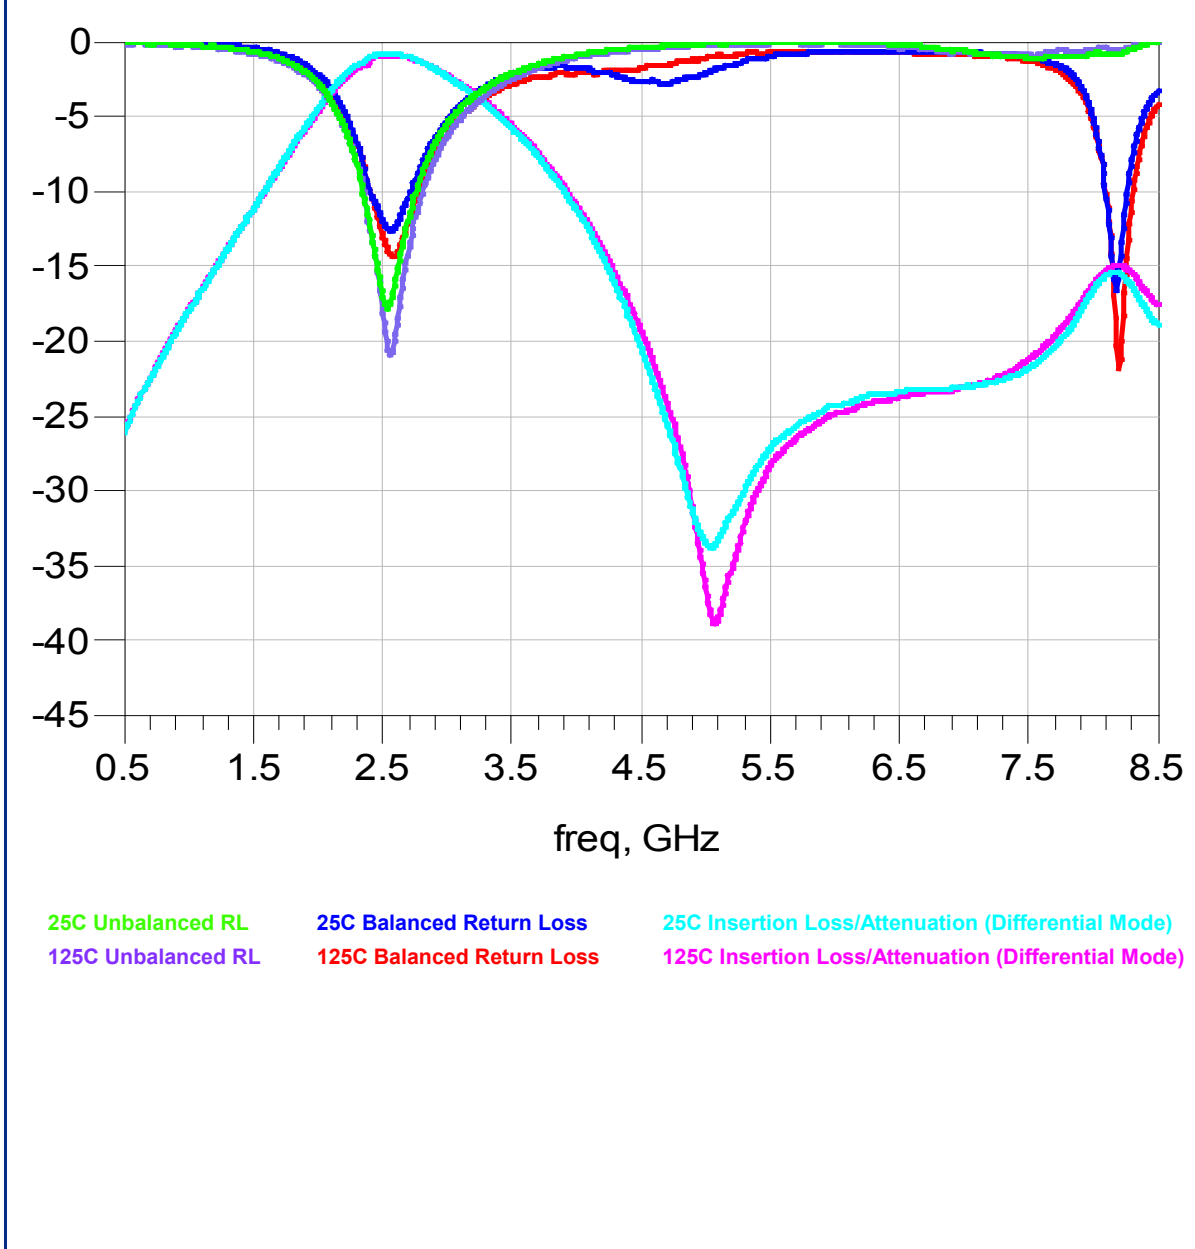

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.1

2012 Johanson Technology, Inc. All Rights Reserved