

HONEYWELL
PART NUMBER
2MN24-N5

PRODUCT CODE:





ANZ8446

NEWHOUSE P/N:

NG11890

REV	DOCUMENT	CHANGED BY	CHECK
3	0087771	SJK 20MAR12	CMH

4X M4 X 6MM BINDING HEAD
TERMINAL SCREWS

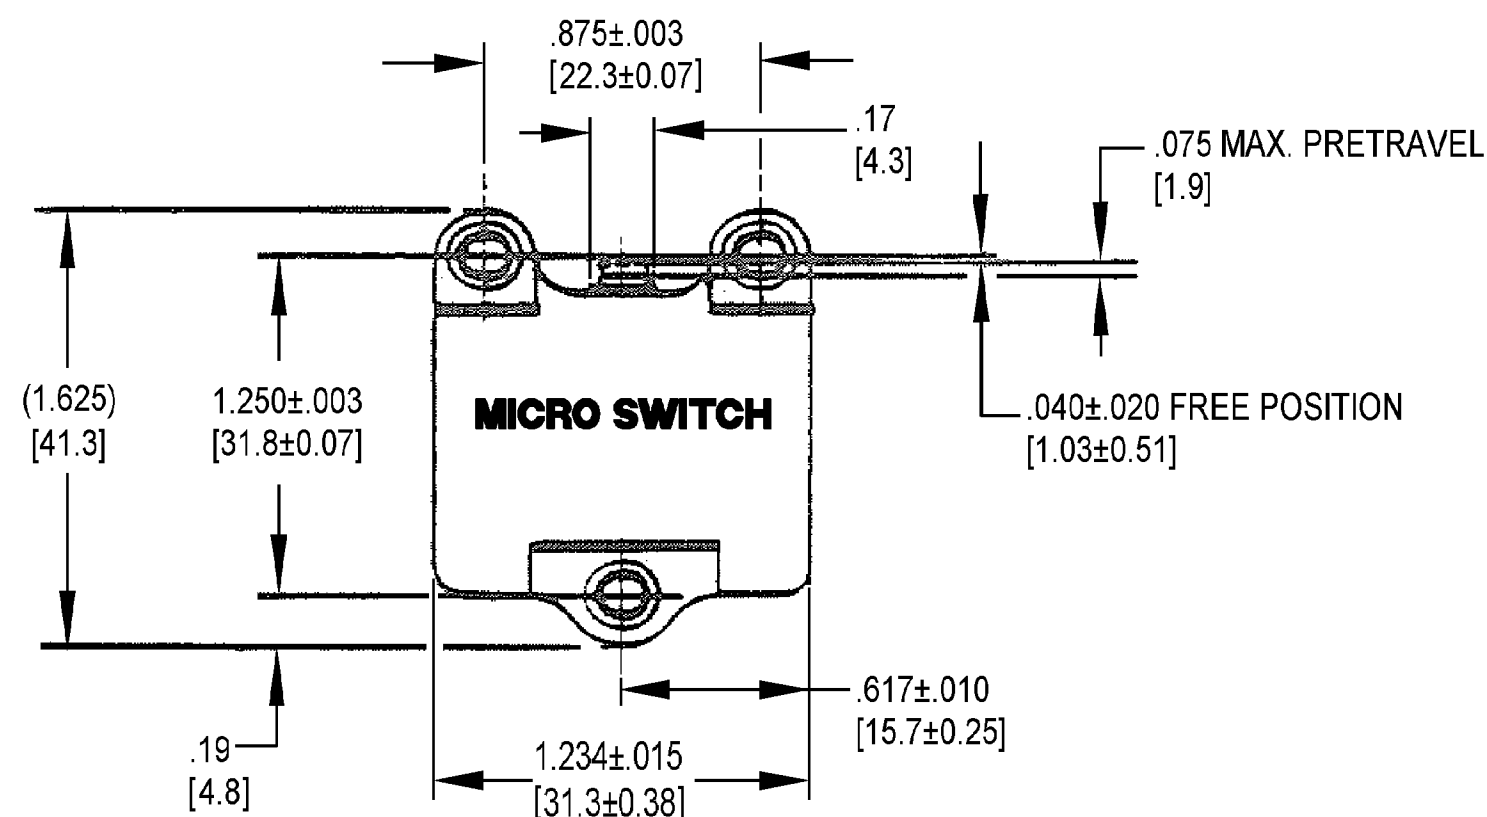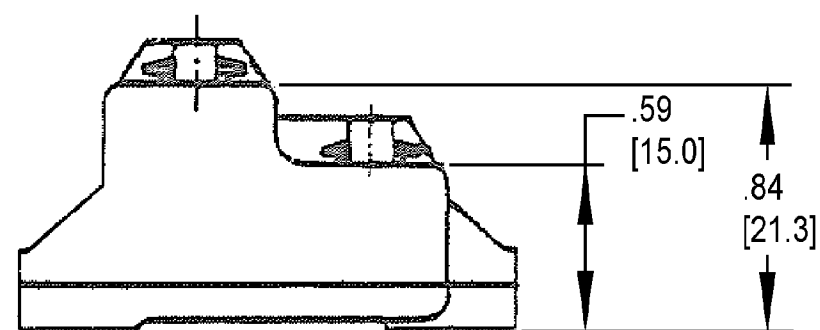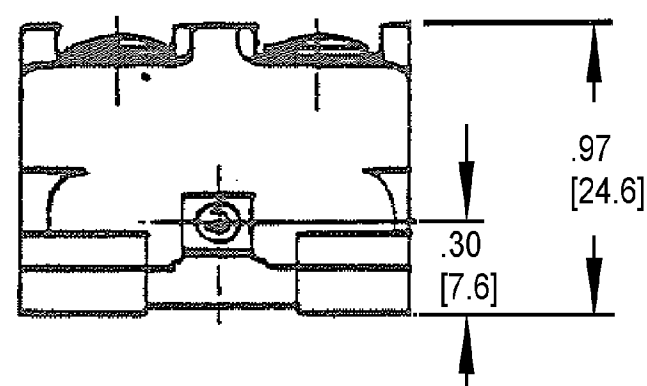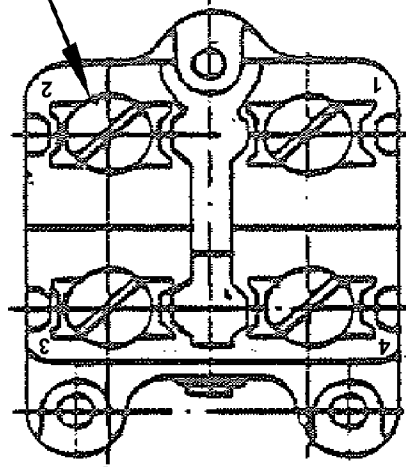


NOTE:

1. MOUNTING HOLES WILL ACCEPT No. 4 SCREWS ON .875±.003 AND 1.250±.003 CENTERS [22.3±0.07] [31.8±0.07]

2. GOLD PLATED CONTACTS.

CHARACTERISTICS		ELECTRICAL DATA
OPERATING FORCE:	24 OZ MAX. (0.680 Kgf)	CONTACT ARRANGEMENT SEE CIRCUIT DIAGRAM
RELEASE FORCE:	10 OZ MIN. (0.283 Kgf)	
DIFFERENTIAL TRAVEL:	.011 - .018 (0.28 - 0.45)	0.1A 60 VAC 0.1A 60 VDC
OVERTRAVEL:	.017 / (0.43) MIN.	
RELEASE TRAVEL:	.022 / (0.56) MIN.	

RELEASE NUMBER		
MS-10640		

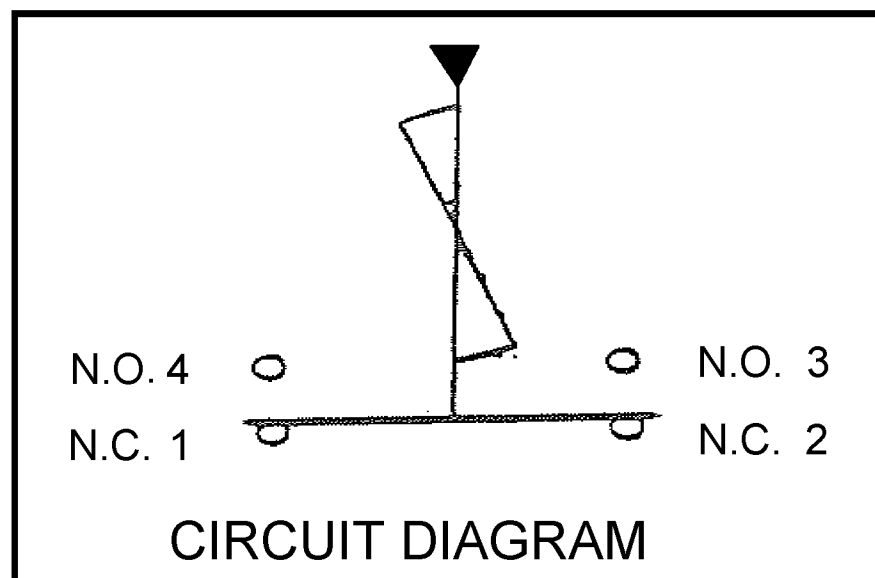

CIRCUIT DIAGRAM

DESIGN UNITS: INCH [MM]
TOLERANCES UNLESS NOTED:

NO PLACES	X	±	-
ONE PLACE	.X	±	.030
TWO PLACE	.XX	±	.015
THREE PLACE	.XXX	±	.005
ANGLES	X	±	-

THIRD ANGLE PROJECTION



DRAWN	PRS	26MAR10
CHECK	HME	26MAR10

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

HoneywellTITLE
SWITCH - BASIC

SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
C	I	-	2MN24-N5	3

SCALE	NONE	SHEET	1 OF 1
-------	------	-------	--------