



IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	116 Ω	261 Ω	561 Ω
Minimum	- Ω	209 Ω	- Ω

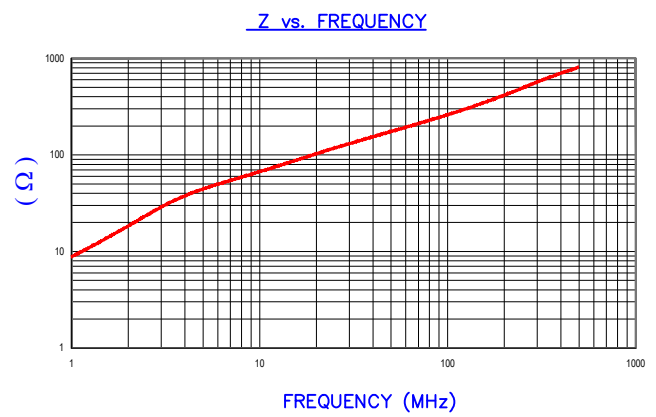

AGILENT E4991A Impedance/Material Analyzer
 HP 16092A-Test Fixture, REF # 4690



UNCONTROLLED DOCUMENT


FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	47.70 [1.878]	+0.50 [.020]	-0.70 [.028]
B	39.00 [1.535]	+0.60 [.024]	-0.50 [.020]
C	31.00 [1.220]	+ 0.70 [.028]	
D	15.00 [.590]	+ 0.45 [.018]	
E	3.00 [.118]	+ 0.25 [.010]	

WEIGHT/1000 91.41 kgs [201.52 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

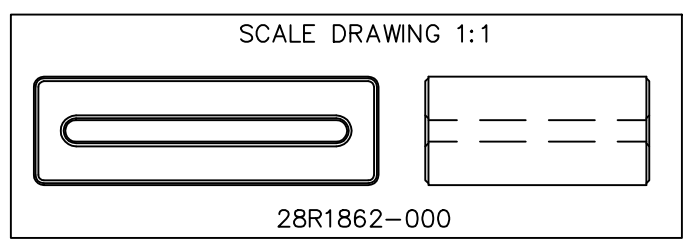

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
				PROJECT/PART NUMBER:	REV	DRAWN BY:	
C	UPDATE COMPANY LOGO	01/07/13	QIU	28R1862-000	C	JRK	
B	UPDATE MIN Z SPECS & COMPANY LOGO	07/27/07	TMB	DATE: 07/19/05	SCALE: 1.5 : 1	MATERIAL:	
A	ORIGINAL DRAFT	07/19/05	JRK	CAD # 28R1862-000-C	TOOL # R1862	FERRITE	
REV	DESCRIPTION	DATE	INT				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Technologies:](#)

[28R1862-000](#)