

Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Preassembled relay modules with spring-cage connection, consisting of: Relay socket, multi-layer contact relay, pluggable display or interference suppression module and retaining bracket. Input voltage: 24 V DC, two PDTs, 8 A

Why buy this product

- Safe isolation between coil and contact side
- Operational reliability thanks to sealed relay
- Logical contact arrangement thanks to 1/3-level relay base



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	5 STK
GTIN	 4 046356 044493
GTIN	4046356044493
Weight per Piece (excluding packing)	72.000 g
Custom tariff number	85364900
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	16 mm
Height	97 mm
Depth	72 mm

Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601

Technical data

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

Coil side

Nominal input voltage U_N	24 V DC
Typical input current at U_N	19 mA
Typical response time	8 ms
Typical release time	10 ms
Protective circuit	Damping diode
Operating voltage display	Yellow LED
Power dissipation for nominal condition	0.46 W

Contact side

Contact type	2 PDT
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	30 V AC
	36 V DC
Minimum switching voltage	100 mV (at 10 mA)
Min. switching current	1 mA (at 24 V)
Maximum inrush current	50 mA
Limiting continuous current	50 mA
Interrupting rating (ohmic load) max.	1.2 W (at 24 V DC)

General

Test voltage relay winding/relay contact	4 kV (50 Hz, 1 min.)
Test voltage relay contact/relay contact	2.5 kV (50 Hz, 1 min.)
Operating mode	100% operating factor
Mechanical service life	3×10^7 cycles
Mounting position	any
Assembly instructions	In rows with zero spacing

Connection data input side

Connection name	Coil side
Connection method	Spring-cage connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16

Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601


Technical data

Standards and Regulations


Standards/regulations	IEC 60664
	EN 50178
Degree of pollution	3
Overvoltage category	III

Drawings

Circuit diagram




Diagram

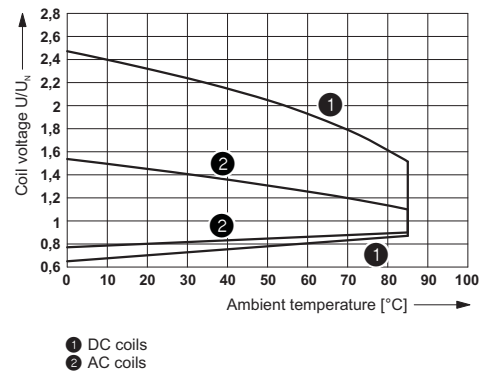


Operating voltage range of the relay

Diagram

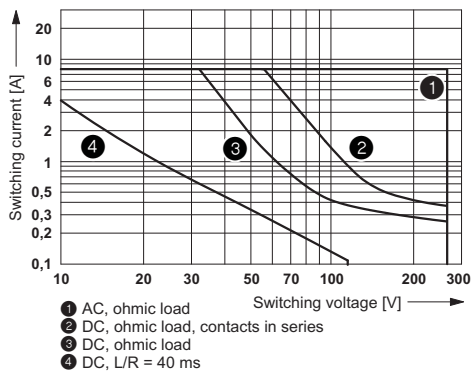

Diagram

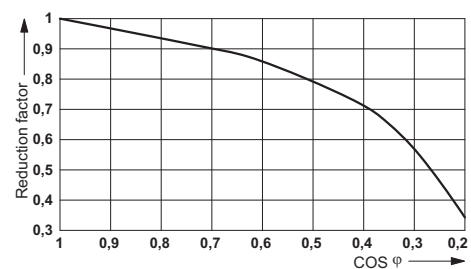


Interrupting rating

Service life reduction factor with various cos phi

Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601

Diagram

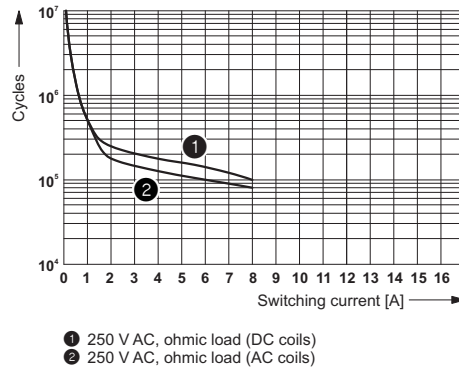

Electrical service life

Articles in set

Relay socket - PR1-BSP3/2X21 - 2833534



Relay socket PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, spring-cage connections, connection facility for input/interference suppression modules

Single relay - REL-MR- 24DC/21-21AU - 2961215



Plug-in miniature power relay, with multi-layer gold contact, 2 PDTs, input voltage 24 V DC

Plug-in module - LDP- 12- 24DC - 2833657



Plug-in module, for mounting on PR1 and PR2, with damping diode and yellow LED, polarity: A1+, A2-, input voltage: 12 ... 24 V DC $\pm 20\%$

Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601

Articles in set

Retaining bracket - EL1-P16 - 2833547



Relay retaining bracket, with eject function and integrated equipment marking area (7.5 x 15 mm), to suit relay socket PR1, for 16 mm high miniature power relay and solid-state relay

Classifications

eCl@ss

eCl@ss 5.0	27371601
eCl@ss 5.1	27371601
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334

Approvals

Approvals

Approvals

EAC / EAC


Relay Module - PR1-RSP3-LDP-24DC/2X21AU - 2834601

Approvals

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01082
-----	---	--------------------------

EAC		EAC-Zulassung
-----	---	---------------