

FO-55111-A

4

3

2

1


HONEYWELL
PART NUMBER

21SX83-H340

PRODUCT CODE

VDM5750

REV	DOCUMENT	CHANGED BY	CHECK
6	0038450	PK 03JUN08	ASD

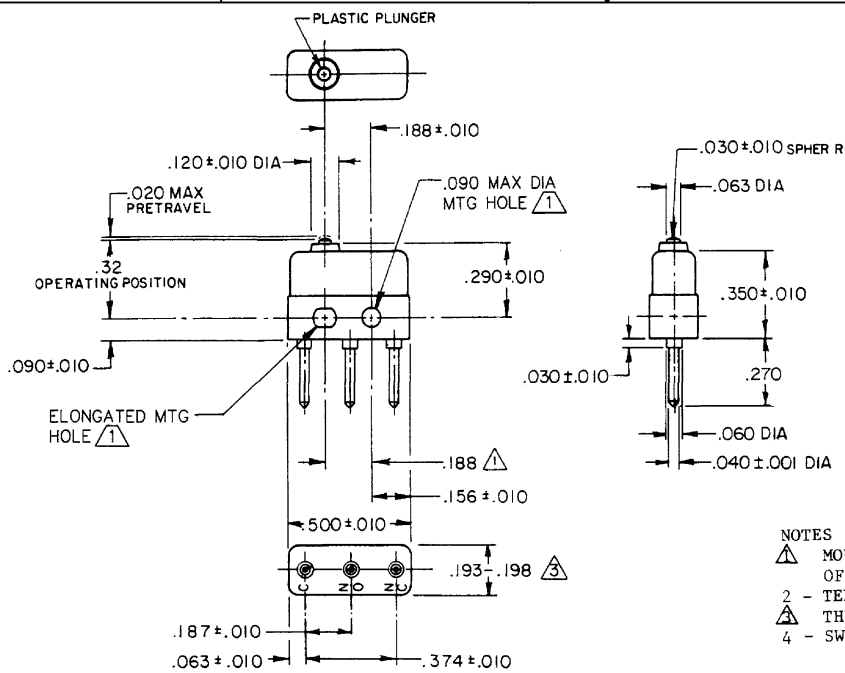

NOTES

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- △ THIS IS A CUSTOMER REQUIREMENT AND MUST BE MET
- 4 - SWITCH WILL WITHSTAND TEMPERATURE OF 185°F

RELEASE NO. PR-14290-T
REPLACES

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH	DRAWN	SPK	21FEB08	Honeywell		
OPERATING FORCE - - - 5 OZ MAX	CONTACT ARRANGEMENT S P D T	TOLERANCES UNLESS NOTED:	CHECK	RJ	21FEB08			
RELEASE FORCE - - - 1 OZ MIN	28 VOLTS DC RATING 115 VOLTS AC 60 CPS	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE		
DIFFERENTIAL TRAVEL - - .005 MAX	SEA LEVEL 50,000 FT SEA LEVEL	ONE PLACE .X ±				SWITCH - BASIC		
OVERTRAVEL - - - .004 MIN	INDUCTIVE 4 AMP 2.5 AMP 7 AMP	TWO PLACE .XX ±						
	RESISTIVE 7 AMP 4 AMP 7 AMP	THREE PLACE .XXX ±				SIZE TYPE DRAWING NAME		
	LAMP 2.5 AMP 2.5 AMP 2 AMP	FOUR PLACE .XXXX ±	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			B	I	21SX83-H340
	APPROVALS KEMA CE 7A 250 V - T125 5E4 CE UL CSA 7A 250 VAC	ANGLES ±				SCALE -	WEIGHT: .003 LB MAX	REV 6
		THIRD ANGLE PROJECTION	RASTER			SHEET 1 OF 1		

4

3

2

1