

2600 series

Power rocker switches

Distinctive features and specifications

UG1410A



- ☐ Three rocker shapes : plain, V-shaped or concave
- ☐ Various rocker colours
- ☐ Frame with protection guard on 2600LP models
- ☐ Illuminated or non-illuminated
- ☐ UL, CSA, VDE and NF (EN 61058-1) approved

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load and approved ratings : see table below.
- Initial contact resistance : 10mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength : 2.500 Vrms 50 Hz min. between terminals
3.000 Vrms 50 Hz min. between terminals and metal panel
- Electrical life : 10.000 cycles at full load

FUNCTIONS	APPROVED RATINGS				DIRECT CURRENT	
	CSA (double pole) CSA 22-2	UL (double pole) UL 1054	VDE EN 61058-1	NF EN 61058-1	24 VDC	12 VDC
ON - OFF ON - ON	1/6 HP 125VAC 16A 125VAC 16A 250VAC 1/3 HP 250VAC	1/6 HP 125VAC 16A 125VAC 16A 250VAC 1/3 HP 250VAC	10(4)A 250VAC T 85/55	-	10A	15A
ON - OFF - ON	10A 125VAC 10A 250VAC 1/6 HP 125/250VAC	10A 125VAC 10A 250VAC 1/6 HP 125/250VAC	LI option 10(4)A 250VAC	LI option 10(4)A 250VAC	8A	10A
ON - ON - ON	-	-	-	-	5A	8A
OTHERS	10A 125VAC 10A 250VAC 1/6 HP 250VAC	-	LI option 10(4)A 250VAC	LI option 10(4)A 250VAC	8A	10A

MATERIALS

- Case : melamine/polyester
- Frame : polyamide
- Actuator : polyamide
- Contacts :
A : silver
C : copper, silver plated

GENERAL SPECIFICATIONS

- Panel thickness : 0,8 mm to 4 mm (.031 to .157)
- Operating temperature :
- silver contacts (A) : -20°C to +85°C
- silver plated contacts (C) : -10°C to +55°C

AGENCY APPROVALS



EN 61058-1 EN 61058-1

Availability : consult factory for details of approved models.


Marking : approved models are standard marked.

The company reserves the right to change specifications without notice.

2600 series

Power rocker switches

Overview

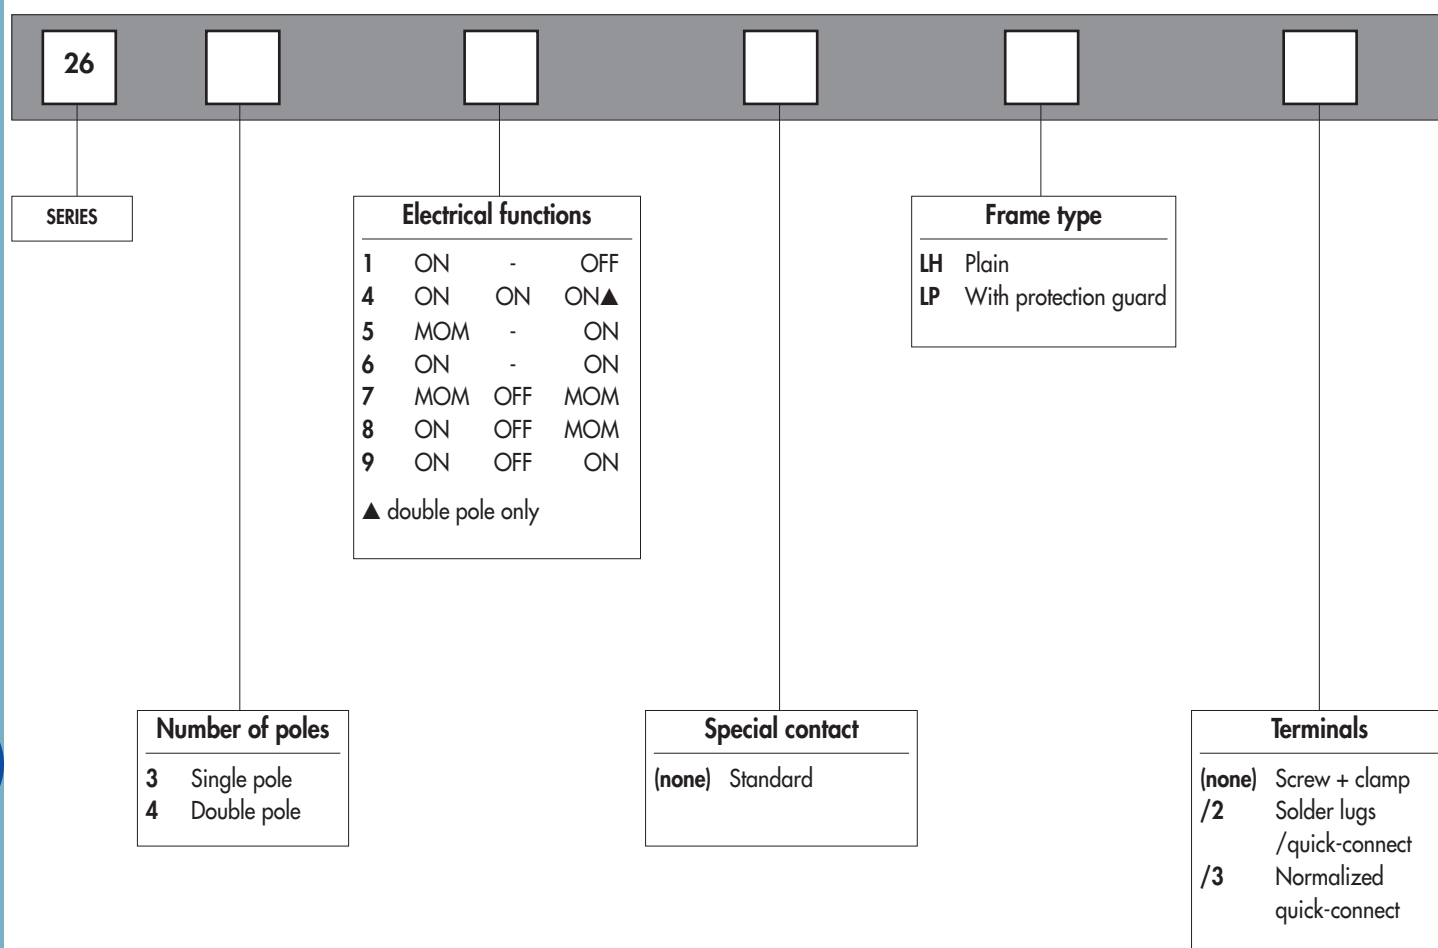

ABOUT THIS SERIES

On the following pages, you will find successively :

- model structure of switches
- options in the same order as in above chart

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



Sealing boot U2150 available to protect the switches against dust and water. See section H.




NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.



2600 series

Power rocker switches

Overview

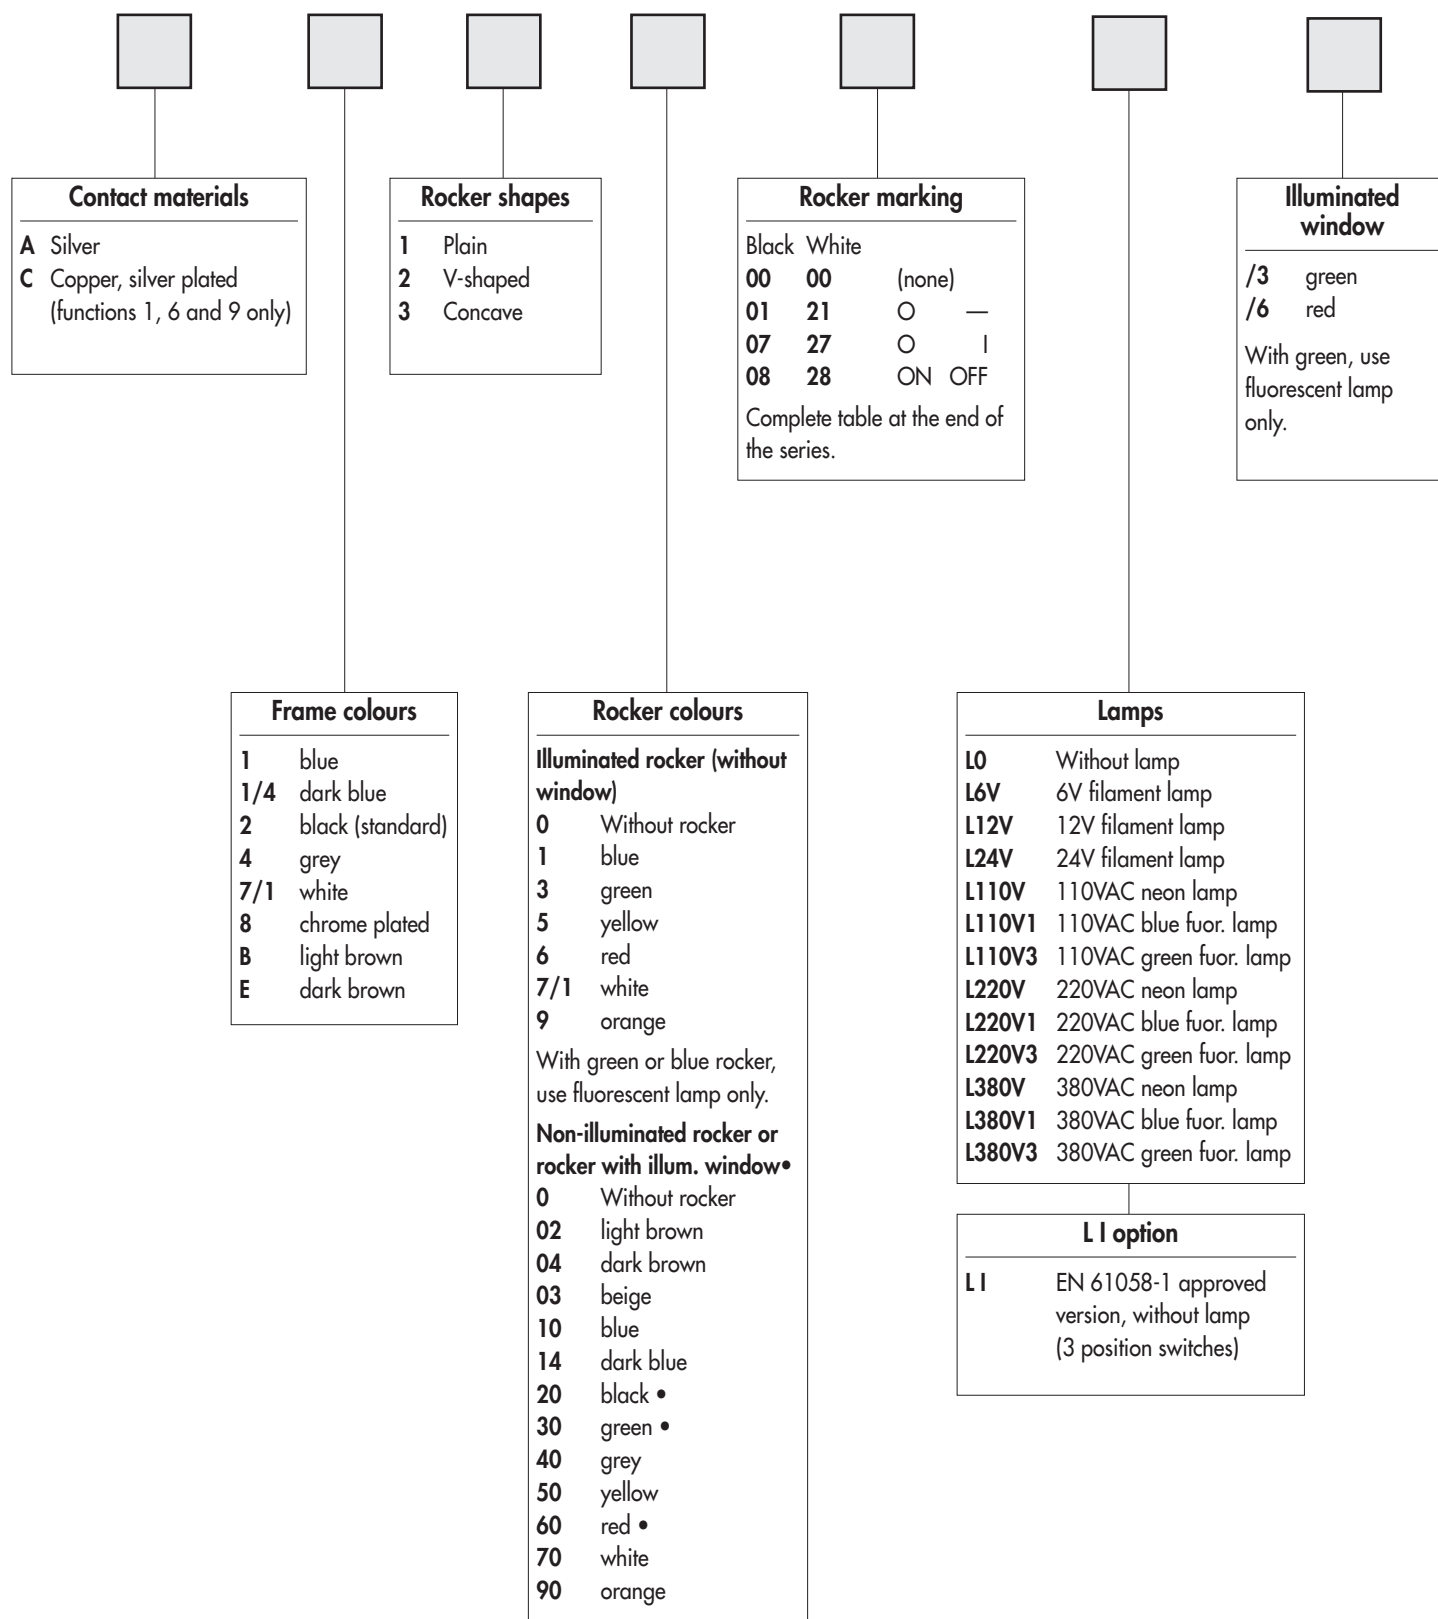


Packaging unit : 20 pieces per type and colour.

2600 series


Power rocker switches

MODEL
STRUCTURE




- Model 2600LP with protection guard
- 1 and 2 pole configurations


2640LH



2640LH/2



MODEL
STRUCTURE




2600LH - single pole



	Screw term. + clamp	Solder lug/ quick-connect
2631LH		2631LH/2
2635LH		2635LH/2
2636LH		2636LH/2
2637LH		2647LH/2
2638LH		2638LH/2
2639LH		2639LH/2

III	II	I
A2-A1	A2-A3	
ON	-	OFF
MOM	-	ON
ON	-	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	OFF	ON

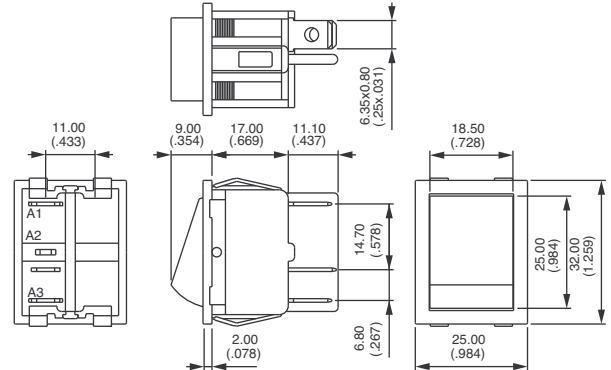


2600LH - double pole



	Screw term. + clamp	Solder lug/ quick-connect
2641LH		2641LH/2
2644LH*		2644LH/2*
2645LH		2645LH/2
2646LH		2646LH/2
2647LH		2647LH/2
2648LH		2648LH/2
2649LH		2649LH/2

III	II	I
A2-A1	A2-A3	
B5-B4	B5-B6	
ON	-	OFF
ON	ON	ON
MOM	-	ON
ON	-	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	OFF	ON

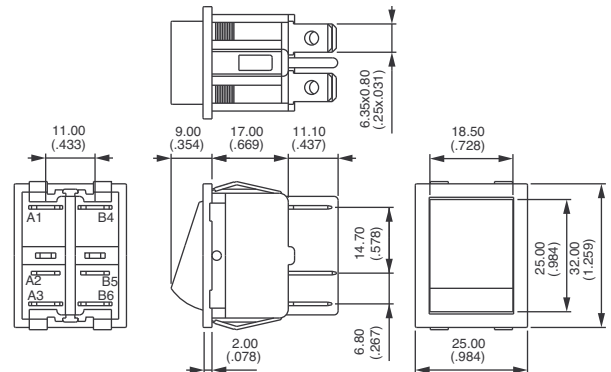


* Function 4 : SP in DP case, see end of catalogue.

2600LP - with protection guard - single pole



	Screw term. + clamp	Solder lug/ quick-connect
2631LP		2631LP/2
2635LP		2635LP/2
2636LP		2636LP/2
2637LP		2637LP/2
2638LP		2638LP/2
2639LP		2639LP/2

III	II	I
A2-A1	A2-A3	
ON	-	OFF
MOM	-	ON
ON	-	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	OFF	ON

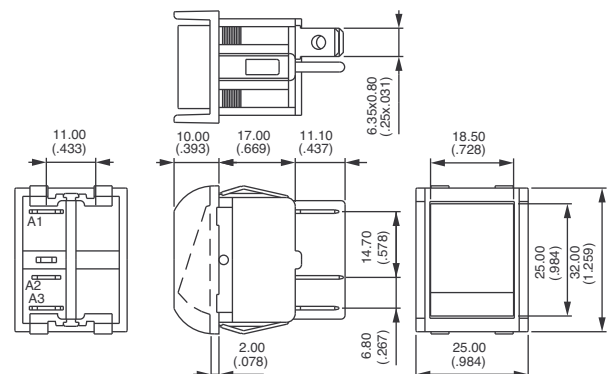


2600LP - with protection guard - double pole




		III	II	I
		A2-A1	A2-A3	
		B5-B4	B5-B6	
Screw term. + clamp	Solder lug/ quick-connect			
2641LP	2641LP/2	ON	-	OFF
2644LP*	2644LP/2*	ON	ON	ON
2645LP	2645LP/2	MOM	-	ON
2646LP	2646LP/2	ON	-	ON
2647LP	2647LP/2	MOM	OFF	MOM
2648LP	2648LP/2	ON	OFF	MOM
2649LP	2649LP/2	ON	OFF	ON

* Function 4 : SP in DP case, see end of catalogue.

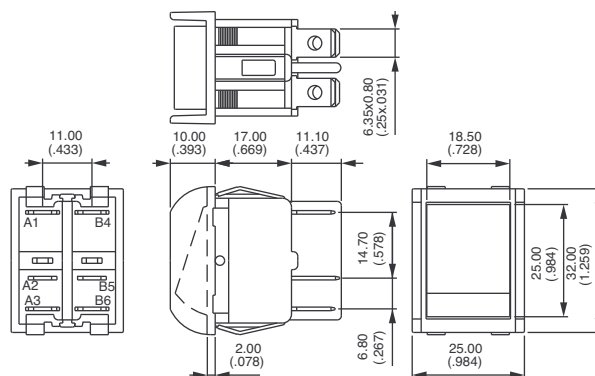


PANEL CUT-OUT



TERMINAL OPTION

Specify after LH or LP.

/3 Normalized quick-connect terminals 6,35 x 0,8 (.250 x .031)




2600 series

Power rocker switches


OPTIONS
● ● ●

CONTACT MATERIALS



- A** Silver
C Copper, silver plated (available with functions 1, 6 and 9 only)

FRAME COLOURS





- 1** Blue
1/4 Dark blue
2 Black (standard)
4 Grey
7/1 White
8 Chrome plated
B Light brown
E Dark brown




This option has UL approval only.

ROCKER SHAPES

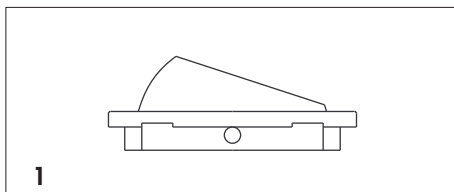


1

Plain

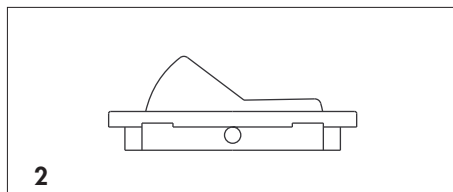

2

V-shaped

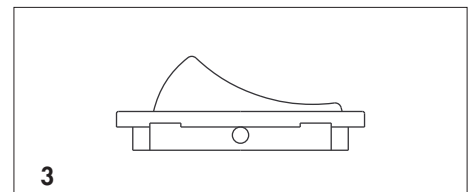

3

Concave



2600 series

Power rocker switches

ROCKER COLOURS



For illuminated switches

	Without rocker	Blue*	Green*	Yellow	Red	White	Orange
Plain rocker P/N	-	U881	U883	U885	U886	U887	U889
V-shaped rocker P/N	-	U861	U863	U865	U866	U867	U869
Concave rocker P/N	-	U871	U873	U875	U876	U877	U879
Colour code	0	1	3	5	6	7/1	9

* With green or blue rocker, use fluorescent lamp only.

For non-illuminated switches or switches with illuminated window (•)


	Without rocker	Light brown	Dark brown	Beige	Blue	Dark blue	Black	Green	Grey	Yellow	Red	White	Orange
Plain rocker P/N	-	U1250B	U1250BF	U1250	U1251	U1251/4	U1252	U1253	U1254	U1255	U1256	U1257	U1259
V-shaped rocker P/N	-	U1270B	U1270BF	U1270	U1271	U1271/4	U1272	U1273	U1274	U1275	U1276	U1277	U1279
Concave rocker P/N	-	U1260B	U1260BF	U1260	U1261	U1261/4	U1262	U1263	U1264	U1265	U1266	U1267	U1269
Colour code	0	02	04	03	10	14	20•	30•	40	50	60•	70	90

Complete box with one of above colour codes.

To order rockers separately, use their P/N (U.....) and complete box with code 0.

Rockers with illuminated windows (codes 20, 30, 60) : part numbers on request.

ROCKER MARKING



MARKING		4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3	3 6 1 4	4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3	4 1 5 2 6 3
COLOUR	-	6 3	6 3	6 3	6 3	6 3	6 3	1 4	6 3	6 3	6 3	6 3
Black	00	01	02	06	07	08	03	04	05*	40	43*	46
Red	00	11	12	16	17	18	13	14	15*	41	44*	47
White	00	21	22	26	27	28	23	24	25*	42	45*	48

* Not available on V-shaped rockers


Special markings and marking on rockers with illuminated window : consult factory.

2600 series


Power rocker switches

OPTIONS
● ● ●

LAMP



L0	Non-illuminated switch
L6V	Filament lamp 6V
L12V	Filament lamp 12V
L24V	Filament lamp 24V
L110V	Neon lamp 110VAC
L110V1	BLUE fluorescent lamp 110VAC
L110V3	Green fluorescent lamp 110VAC
L220V	Neon lamp 220VAC
L220V1	BLUE fluorescent lamp 220VAC
L220V3	Green fluorescent lamp 220VAC
L380V	Neon lamp 380VAC
L380V1	BLUE fluorescent lamp 380VAC
L380V3	Green fluorescent lamp 380VAC
LI	EN61058-1 approved version without lamp (3 position switches)




For illuminated models, the lamp is always connected between center terminals 2 and 5.



Lamps L380V, L380V1 and L380V3 are not UL/CSA approved.


ILLUMINATED WINDOW



For black, green and red rockers only

/3 Green
/6 Red

With green, use fluorescent lamp only.
No marking available on illuminated windows.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apem:

[2631LH/2A212000L0](#) [2641LH/2A212000L0](#) [2641LH/2A21300L110V3](#) [2641LH/2A216000L0](#) [2641LH/2A21600L110V](#)
[2641LHA212000L0](#) [2641LHA21900L110V](#) [2641LP/2A21600L110V](#) [2641LP/2A222021L0](#) [2641LP/2A222028L0](#)
[2641LPA21600L110V](#) [2641SLH/2A212000L0](#) [2641SLHA212028L0](#) [2646LH/2A212000L0](#) [2646LH/2A21300L110V3](#)
[2646LH/2A21600L110V](#) [2646LP/2A21600L110V](#) [2647LH/2A212000L0](#) [2647LHA212000L0](#) [2648LH/2A212000L0](#)
[2649LH/2A212000L0](#) [2649LH/2A21300L110V3](#) [2649LH/2A21600L110V](#) [2649LPA21600L110V](#) [2648LHA232000L0](#)
[2649LP/2A21600L110V](#) [104350108](#) [2636LHA232000L0](#) [2636LH/A232000L0](#) [2636LH/2A7/123000L0](#)
[2637LH/2A7/122048L0](#) [2638LH/2A7/127000L0](#) [2639LH/2A7/127000L0](#) [2641LH/2A21321L110V3](#)
[2641LH/2A21321L220V3](#) [2641LH/2A216021L0](#) [2641LH/2A21921L110V](#) [2641LH/2A21921L220V](#)
[2641LH/2A222000L0](#) [2641LH/2A22628L110V](#) [2641LH/2A232021L0](#) [2641LH/2A23601L220V](#) [2641LH/2A23621L220V](#)
[2641LH/2A23628L220V](#) [2641LH/2A832021L0](#) [2641LH/3A22300L220V3](#) [2641LHA21900L220V](#) [2641LP/2A222000L0](#)
[2641LP/2A22300L24V](#) [2641LP/2A23301L110V3](#) [2641LP/2A237/100L110V3](#) [2641LPA222000L220V/6](#)
[26442RLH/2A7/127000L0](#) [2644LP/2A222000L0](#) [2645LH/2A232000L0](#) [2646LP/2A212021L0](#) [2647LH/2A232000L0](#)
[2649LH/2A200000L0](#) [2649LH/2A212045L0](#) [2649LH/2A21900L220V](#) [2649LH/2A232000L0](#) [2649LH/2A7/123000L0](#)
[2649LH/2C21900L12V](#)