

2N4416  
2N4416A

SILICON  
N-CHANNEL JFETS



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N4416 and 2N4416A are silicon N-Channel Junction Field Effect Transistors designed for VHF amplifier and mixer applications.



TO-72 CASE

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ( $T_A=25^\circ\text{C}$ )

Gate-Drain Voltage  
Gate-Source Voltage  
Drain-Source Voltage  
Gate Current  
Power Dissipation  
Operating and Storage Junction Temperature

SYMBOL	2N4416	2N4416A	UNITS
$V_{GD}$	30	35	V
$V_{GS}$	30	35	V
$V_{DS}$	30	35	V
$I_G$		10	mA
$P_D$		300	mW
$T_J, T_{stg}$		-65 to +200	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	2N4416		2N4416A		UNITS
		MIN	MAX	MIN	MAX	
$I_{GSS}$	$V_{GS}=20\text{V}, V_{DS}=0$	-	100	-	100	pA
$I_{GSS}$	$V_{GS}=20\text{V}, V_{DS}=0, T_A=150^\circ\text{C}$	-	100	-	100	nA
$I_{DSS}$	$V_{DS}=15\text{V}, V_{GS}=0$	5.0	15	5.0	15	mA
$BV_{GSS}$	$I_G=1.0\mu\text{A}$	30	-	35	-	V
$V_{GS(off)}$	$V_{DS}=15\text{V}, I_D=1.0\text{nA}$	-	6.0	2.5	6.0	V
$g_{FS}$	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{kHz}$	4,500	7,500	4,500	7,500	$\mu\text{S}$
$g_{OS}$	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{kHz}$	-	50	-	50	$\mu\text{S}$
$C_{rss}$	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	1.0	-	1.0	pF
$C_{iss}$	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	4.0	-	4.0	pF
$C_{oss}$	$V_{DS}=15\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	2.0	-	2.0	pF

HIGH FREQUENCY CHARACTERISTICS:

SYMBOL	TEST CONDITIONS	100MHz		400MHz		UNITS
		MIN	MAX	MIN	MAX	
$g_{iss}$	$V_{DS}=15\text{V}, V_{GS}=0$	-	100	-	1,000	$\mu\text{S}$
$b_{iss}$	$V_{DS}=15\text{V}, V_{GS}=0$	-	2,500	-	10,000	$\mu\text{S}$
$g_{oss}$	$V_{DS}=15\text{V}, V_{GS}=0$	-	75	-	100	$\mu\text{S}$
$b_{oss}$	$V_{DS}=15\text{V}, V_{GS}=0$	-	1,000	-	4,000	$\mu\text{S}$
$g_{fs}$	$V_{DS}=15\text{V}, V_{GS}=0$	-	-	4,000	-	$\mu\text{S}$
$G_{ps}$	$V_{DS}=15\text{V}, I_D=5.0\text{mA}$	18	-	10	-	dB
NF	$V_{DS}=15\text{V}, I_D=5.0\text{mA}, R_G=1.0\text{k}\Omega$	-	2.0	-	4.0	dB

R2 (4-June 2013)



2N4416  
2N4416A


SILICON  
N-CHANNEL JFETS




www.centrasemi.com

TYPICAL ELECTRICAL CHARACTERISTICS


Output Characteristics

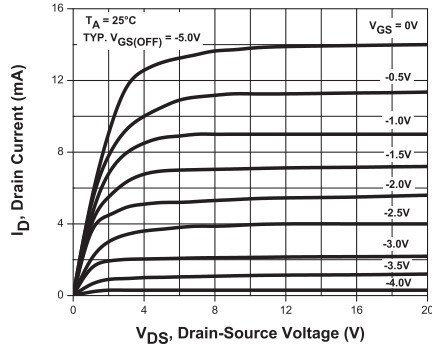


Output Characteristics

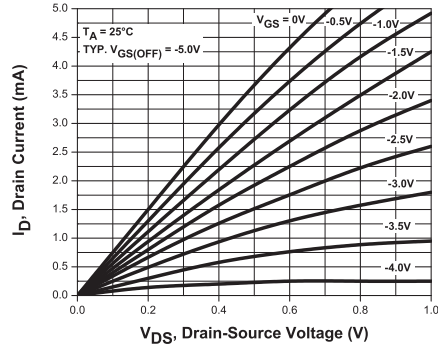


Output Characteristics

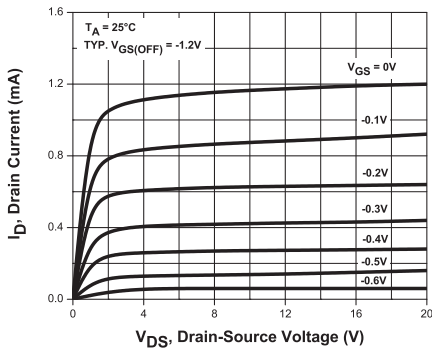


Output Characteristics

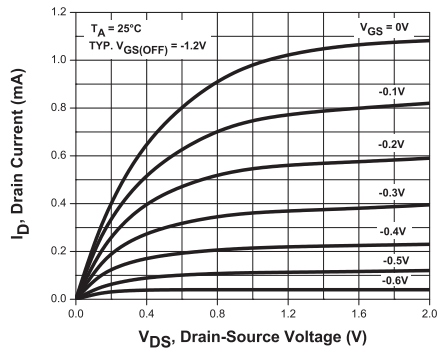

Forward Transconductance Characteristics

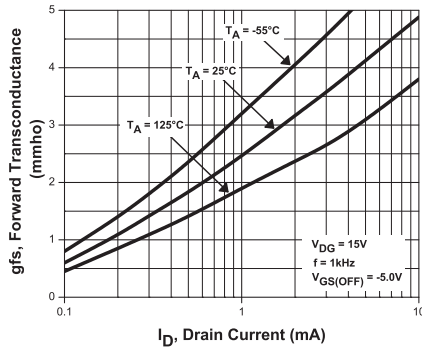

Forward Transconductance Characteristics




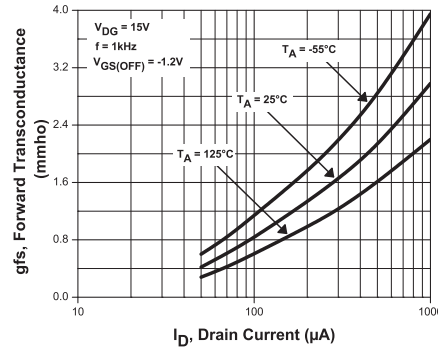


R2 (4-June 2013)

2N4416  
2N4416A  
  
SILICON  
N-CHANNEL JFETS



TYPICAL ELECTRICAL CHARACTERISTICS

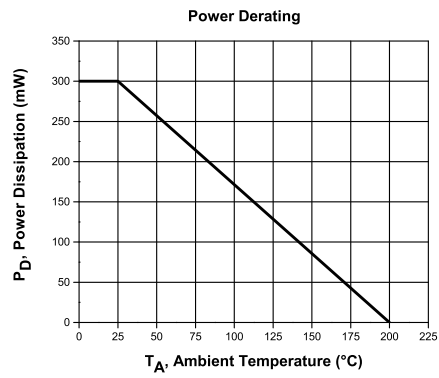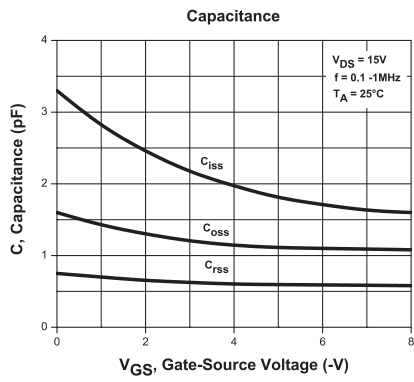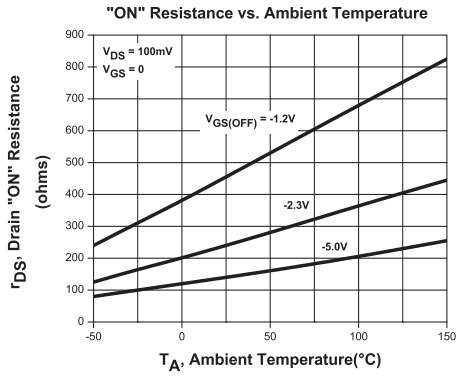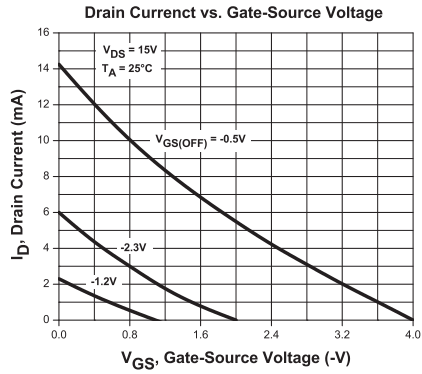

R2 (4-June 2013)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[2N4416A](#) [2N4416](#)