

Distributed by:



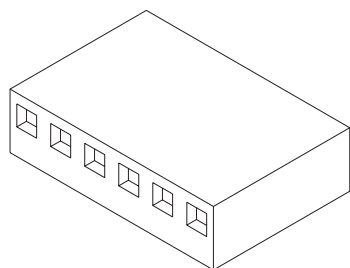
www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1965461

2.54mm (.100") Pitch KK® Crimp Terminal Housing

2695/6471



Features and Benefits

- Sizes 1 to 25 circuits
- 6471 is end-to-end stackable (2 housings only)
- 2695 version with or without locking ramp and polarizing ribs

Reference Information

Product Specification: PS-10-07

Packaging: Bag

UL File No.: E29179

CSA File No.: LR19980

Mates With: Molex KK 2.54mm (.100") pitch headers and 0.04mm (.025") pins

Use With: 2695—2759, 6459 or 41572 terminals

6471—4809 terminals

Designed In: Inches

Electrical*

Voltage: 250V

Current: Phosphor Bronze—4.0A max.

Brass—2.5A max.

Dielectric Withstanding Voltage: 1500V AC

Insulation Resistance: 50K Megohms min.

Mechanical*

Contact Insertion Force: 681g (1.5 lb) max.

Contact Retention to Housing: 3.63kg (8 lb) min.

Mating Force: 199g max.

Unmating Force: 57g min.

Normal Force: 200g min.

Physical

Housing: Nylon, UL 94V-0

Operating Temperature: 0 to +75°C

Circuits	Order No.			
	2695			6471
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†
1			22-01-2011	
2	22-01-2027	22-01-3027	22-01-2021	22-01-2025
3	22-01-2037	22-01-3037	22-01-2031	22-01-2035
4	22-01-2047	22-01-3047	22-01-2041	22-01-2045
5	22-01-2057	22-01-3057	22-01-2051	22-01-2055
6	22-01-2067	22-01-3067	22-01-2061	22-01-2065
7	22-01-2077	22-01-3077	22-01-2071	22-01-2075
8	22-01-2087	22-01-3087	22-01-2081	22-01-2085
9	22-01-2097	22-01-3097	22-01-2091	22-01-2095
10	22-01-2107	22-01-3107	22-01-2101	22-01-2105
11	22-01-2117	22-01-3117	22-01-2111	22-01-2115
12	22-01-2127	22-01-3127	22-01-2121	22-01-2125
13	22-01-2137	22-01-3137	22-01-2131	22-01-2135

Note: When mating polarizing rib version with breakaway friction lock header or polarizing wall series, the end friction lock or polarizing wall of header must be removed

* When mated with Molex product only


† For circuits 19-28, contact Molex

Circuits	Order No.			
	2695			6471
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†
14	22-01-2147	22-01-3147	22-01-2141	22-01-2145
15	22-01-2157	22-01-3157	22-01-2151	22-01-2155
16	22-01-2167	22-01-3167	22-01-2161	22-01-2165
17	22-01-2177	22-01-3177	22-01-2171	22-01-2175
18	22-01-2187	22-01-3187	22-01-2181	22-01-2185
19	22-01-2197	22-01-3197	22-01-2191	
20	22-01-2207	22-01-3207	22-01-2201	
21	22-01-2217	22-01-3217	22-01-2211	
22	22-01-2227	22-01-3227	22-01-2221	
23	22-01-2237	22-01-3237	22-01-2231	
24	22-01-2247	22-01-3247	22-01-2241	
25	22-01-2257	22-01-3257	22-01-2251	

	Order No.
Polarizing Key	15-04-9209
Polarizing Peg	15-04-9210

2.54mm (.100") Pitch KK® Crimp Terminal Housing

7880 High Pressure



Features and Benefits

- Sizes 1 to 28 circuits
- Standard with locking ramp
- Suitable for high vibration requirements

Reference Information

Product Specification: PS-7879

Packaging: Bag

UL File No.: E29179

CSA File No.: LR19980

Mates With: Molex KK 2.54mm (.100") pitch headers

Use With: 7879 terminals

Designed In: Inches

Electrical*

Voltage: 250V

Current: 2.5A

Dielectric Withstanding Voltage: 1500V AC

Insulation Resistance: 500K Megohms min.

Mechanical*

Contact Insertion Force: 1.5 lb max.

Contact Retention to Housing: 8 lb min.

Mating Force: 475g max.

Unmating Force: 100g min.

Normal Force: 430g min.

Physical

Housing: Nylon, UL 94V-0

Operating Temperature: -0 to +75°C

Circuits	Order No.
1	10-11-2013
2	10-11-2023
3	10-11-2033
4	10-11-2043
5	10-11-2053
6	10-11-2063
7	10-11-2073
8	10-11-2083
9	10-11-2093
10	10-11-2103

Circuits	Order No.
11	10-11-2113
12	10-11-2123
13	10-11-2133
14	10-11-2143
15	10-11-2153
16	10-11-2163
17	10-11-2173
18	10-11-2183
19	10-11-2193

Circuits	Order No.
20	10-11-2203
21	10-11-2213
22	10-11-2223
23	10-11-2233
24	10-11-2243
25	10-11-2253
26	10-11-2263
27	10-11-2273
28	10-11-2283

* When mated with Molex product only

Note: In the Far East this housing has a different Engineering Series No. and different Order No.



PRODUCT SPECIFICATION

1.0 SCOPE

This Product Specification covers the 2.54 mm (.100 inch) centerline (pitch) 0.64 mm (.025) square pin headers when mated with either printed circuit board (PCB) connectors or connectors terminated with 22 to 28 AWG wire using crimp technology.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBERS

Crimp Terminals: 2759, 41572, 6459

Crimp Housings: 2695

PCB Connectors: 4455, 42625

Headers: 4030, 4094, 6373, 7478, 42225, 42226, 42227, 42228, 42152, 42153, 42375, 42376, 42377, 42624.

Other products conforming to this specification are noted on the individual drawings.

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Terminal Material: Brass or Phos. Bronze (for Max performance use phos bronze material.)

Housing: Nylon or Polyester

Pins: Brass or Phos. Bronze

For more information on dimensions, materials, and plating see the individual drawings.

2.3 SAFETY AGENCY APPROVALS

UL File Number E29179

CSALR19980

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

None

4.0 RATINGS

4.1 VOLTAGE

250 Volts

4.2 CURRENT AND APPLICABLE WIRES (Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.)

AWG	Amps (Max)	Outside Insulation Diameter
22	4.00	See Drawings
24	3.75	See Drawings
26	3.50	See Drawings
28	3.00	See Drawings

4.3 TEMPERATURE (ambient + 30° temp rise)

Operating: 0°C to +75°C

Nonoperating: - 40°C to +105°C

REVISION: P3	ECR/ECN INFORMATION: EC No: UCP2008-0956 DATE: 11/6/2007	TITLE: PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	SHEET No. 1 of 5
DOCUMENT NUMBER: PS-10-07	CREATED / REVISED BY: ADERR	CHECKED BY: JBELL	APPROVED BY: FSMITH



PRODUCT SPECIFICATION

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA.	10 milliohms MAXIMUM [initial]
Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	2 milliohms MAXIMUM [initial]
Insulation Resistance	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
Dielectric Withstanding Voltage	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown
Capacitance	Measure between adjacent terminals at 1 MHz.	2 picofarads MAXIMUM
Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

REVISION: P3	ECR/ECN INFORMATION: EC No: UCP2008-0956 DATE: 11/6/2007	TITLE: PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	SHEET No. 2 of 5
DOCUMENT NUMBER: PS-10-07	CREATED / REVISED BY: ADERR	CHECKED BY: JBELL	APPROVED BY: FSMITH



PRODUCT SPECIFICATION

5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT		
Connector Mate and Unmate Forces	Per circuit when mated to an .025 Sq. pin. Mate and unmate connector (male to female) at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute.	1.95 N (0.438 lbf) MAXIMUM insertion force & 0.56 N (0.125 lbf) MINIMUM withdrawal force		
Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (Forces will change with platings and materials.)	17.8 N (4.0 lbf) MINIMUM withdrawal force		
Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (Forces will change with platings and materials.)	6.67 N (1.5 lbf) MAXIMUM insertion force		
Durability	Mate connectors up to 25 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	10 milliohms MAXIMUM (change from initial)		
Vibration (Random)	Mate connectors and vibrate per EIA 364-28, test condition VII.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond		
Shock (Mechanical)	Mate connectors and shock at 50 g's with $\frac{1}{2}$ sine wave (11 milliseconds) shocks in the $\pm X, \pm Y, \pm Z$ axes (18 shocks total).	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond		
Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (For maximum performance use Molex application tooling with stranded tinned copper wire)	22 awg = 44 N (10 lbf) 24 awg = 35 N (8 lbf) 26 awg = 26 N (6 lbf) 28 awg = 17 N (4 lbf) 30 awg = 13 N (3 lbf)		
Normal Force	Apply a perpendicular force.	2.94 N (300 grams) average		
Kinked PC Pin Insertion Force (into PCB Hole)	Apply an axial insertion force on pins at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute.	Number of kinked pins	Maximum Insertion force (per pin)	Average Insertion force (per pin)
		2	44.0 N (9.9 lbf)	15.1N (3.4 lbf)
		4	21.4 N (4.8 lbf)	9.8 N (2.2 lbf)
		6	18.2 N (4.1 lbf)	4.9 N (1.1 lbf)

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
P3	EC No: UCP2008-0956 DATE: 11/6/2007	PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	3 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-10-07	ADERR	JBELL	FSMITH



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT										
Shock (Thermal)	Mate connectors; expose to 5 cycles of: <table><tr><th>Temperature °C</th><th>Duration (Minutes)</th></tr><tr><td>-40 +0/-3</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr><tr><td>+105 +3/-0</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr></table>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)											
-40 +0/-3	30											
+25 ±10	5 MAXIMUM											
+105 +3/-0	30											
+25 ±10	5 MAXIMUM											
Thermal Aging	Mate connectors; expose to: 96 hours at 105 ± 2°C	10 milliohms MAXIMUM (change from initial]) & Visual: No Damage										
Humidity (Steady State)	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours. Note: Remove surface moisture and air dry for 1 hour prior to measurements.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Humidity (Cyclic)	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours. {Note: Remove surface moisture and air dry for 1 hour prior to measurements.}	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)										

REVISION: P3	ECR/ECN INFORMATION: EC No: UCP2008-0956 DATE: 11/6/2007	TITLE: PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	SHEET No. 4 of 5
DOCUMENT NUMBER: PS-10-07	CREATED / REVISED BY: ADERR	CHECKED BY: JBELL	APPROVED BY: FSMITH



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Solder Resistance	Dip connector terminal tails in solder: Solder Duration: 5 ± 0.5 seconds; Solder Temperature: $230 \pm 5^{\circ}\text{C}$	Visual: No Damage to insulator material
Cold Resistance	Mate connectors: Duration: 96 hours; Temperature: $-40 \pm 3^{\circ}\text{C}$	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Corrosive Atmosphere: Flowing Mixed Gas (FMG)	Test per EIA-364-65, Class II, Exposure to gasses for 4 days, unmated.	10 milliohms MAXIMUM (change from initial) & Visual: No Damage






6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage.

7.0 GAGES AND FIXTURES

8.0 OTHER

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
P3	EC No: UCP2008-0956 DATE: 11/6/2007	PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	5 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-10-07	ADERR	JBELL	FSMITH

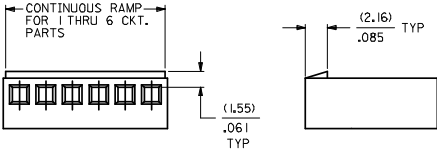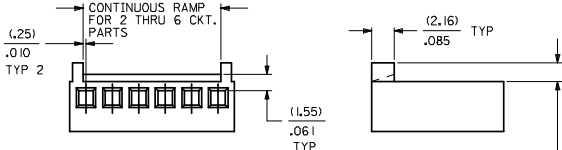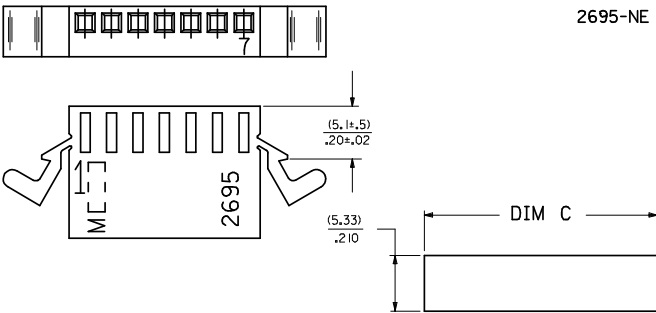
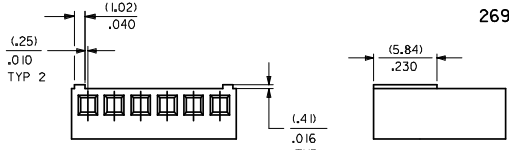
	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
M	NO. OF CKT'S.	DIM. A	DIM. B	DIM. C	2695-NR															
	1	N/A	(3.10) .122	(7.16) .282																
L	2	(2.54+.05) .100+.002	(5.64) .222	(9.70) .382																
	3	(5.08+.05) .200+.002	(8.18) .322	(12.24) .482																
	4	(7.62+.05) .300+.002	(10.72) .422	(14.78) .582																
	5	(10.16+.05) .400+.002	(13.26) .522	(17.32) .682																
K	6	(12.70+.08) .500+.003	(15.80) .622	(19.86) .782																
	7	(15.24+.08) .600+.003	(18.34) .722	(22.40) .882																
	8	(17.78+.08) .700+.003	(20.88) .822	(24.94) .982																
J	9	(20.32+.10) .800+.004	(23.42) .922	(27.48) 1.082																
	10	(22.86+.10) .900+.004	(25.96) 1.022	(30.02) 1.182																
	11	(25.4+.10) 1.000+.004	(28.50) 1.122	(32.56) 1.282																
I	12	(27.94+.13) 1.100+.005	(31.04) 1.222	(35.10) 1.382	2695-NRP															
	13	(30.48+.13) 1.200+.005	(33.58) 1.322	(37.64) 1.482																
H	14	(33.02+.13) 1.300+.005	(36.12) 1.422	(40.18) 1.582																
	15	(35.56+.13) 1.400+.005	(38.66) 1.522	(42.72) 1.682																
	16	(38.10+.15) 1.500+.006	(41.20) 1.622	(45.26) 1.782																
	17	(40.64+.15) 1.600+.006	(43.74) 1.722	(47.80) 1.882																
	18	(43.18+.15) 1.700+.006	(46.28) 1.822	(50.34) 1.982																
G	19	(45.72+.15) 1.800+.006	(48.82) 1.922	(52.88) 2.082																
	20	(48.26+.15) 1.900+.006	(51.36) 2.022	(55.42) 2.182																
	21	(50.80+.18) 2.000+.007	(53.90) 2.122	(57.96) 2.282																
F	22	(53.34+.18) 2.100+.007	(56.44) 2.222	(60.50) 2.382																
	23	(55.88+.18) 2.200+.007	(58.98) 2.322	(63.04) 2.482	2695-NE															
	24	(58.42+.18) 2.300+.007	(61.52) 2.422	(65.58) 2.582																
E	25	(60.96+.20) 2.400+.008	(64.06) 2.522	(68.12) 2.682																
	26	(63.50+.20) 2.500+.008	(66.60) 2.622	(70.66) 2.782																
	27	(66.04+.20) 2.600+.008	(69.14) 2.722	(73.20) 2.882																
	28	(68.58+.20) 2.700+.008	(71.68) 2.822	(75.74) 2.982																
D	29	(71.12+.23) 2.800+.009	(74.22) 2.922	(78.28) 3.082																
	30	(73.66+.23) 2.900+.009	(76.76) 3.022	(80.82) 3.182																
	31	(76.20+.23) 3.000+.009	(79.30) 3.122	(83.36) 3.282																
C	32	(78.74+.23) 3.100+.009	(81.84) 3.222	(85.90) 3.382																
	33	(81.28+.25) 3.200+.010	(84.38) 3.322	(88.44) 3.482																
	34	(83.82+.25) 3.300+.010	(86.92) 3.422	(90.98) 3.582																
	35	(86.36+.25) 3.400+.010	(89.46) 3.522	(93.52) 3.682	RECOMMENDED PANEL OPENING (.157)/.062 THICK															
B	36	(88.90+.25) 3.500+.010	(92.00) 3.622	(96.06) 3.782	2695-NC*															
	37	(91.44+.28) 3.600+.011	(94.54) 3.722	(98.60) 3.882																
	38	(93.98+.28) 3.700+.011	(97.08) 3.822	(101.14) 3.982																
A	39	(96.52+.28) 3.800+.011	(99.62) 3.922	(103.68) 4.082																
	40	(99.06+.28) 3.900+.011	(102.16) 4.022	(106.22) 4.182																

2695 - N *
NO. OF. CIRCUITS

VOID LOCATION
SEE CHART

OPTION CODE

	MOUNTING EARS	RAMP	POLARIZING RIBS	DYED	MAT'L	RETENTION PEG
BLANK	NO	NO	NO	NO	NOTE 1A	NO
E	YES	NO	NO	NO	NOTE 1A	NO
R	NO	YES	NO	NO	NOTE 1A	NO
RP	NO	YES	YES	NO	NOTE 1A	NO
RPD	NO	YES	YES	YES	NOTE 1A	NO
C	NO	NO	NO	NO	NOTE 1A	YES
RP-BK	NO	YES	YES	NO	NOTE 1B	NO

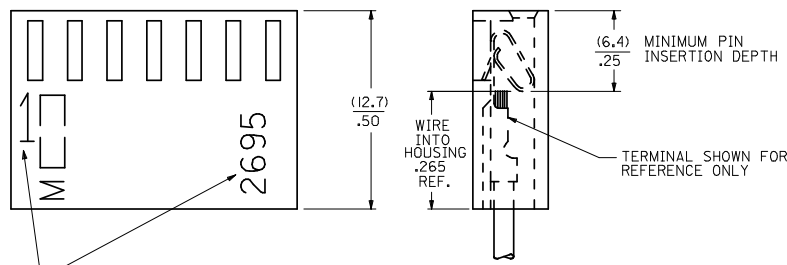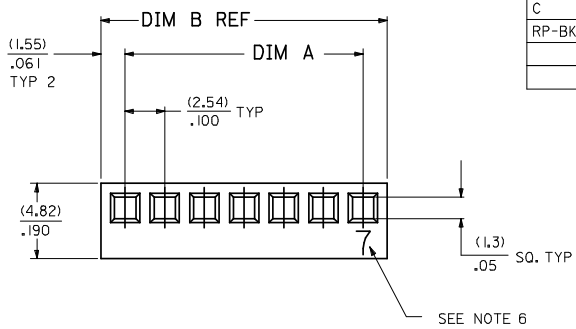

- NOTES
1. MATERIAL: A - NYLON, UL94V-0, COLOR: WHITE
B - NYLON, UL94V-0, COLOR: BLACK
 2. FINISH: SEE TERMINAL DRAWING
 3. THIS HOUSING CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-10-07.
 4. PACKAGING: N/A
 5. HOUSING TO BE USED WITH CRIMP TYPE TERMINAL NUMBER 2759, 22-30 GAUGE WIRE WITH (.157)/.062 DIAMETER MAXIMUM WIRE INSULATION.
 6. LAST CIRCUIT NUMBER TO BE DESIGNATED ON 7 CKTS. AND HIGHER, EXCEPT WHEN "MXI" APPEARS.
 7. CIRCUIT NUMBER "1" AND ENGINEERING NUMBER TO APPEAR ON PARTS 3 CKTS. AND HIGHER.

REVISE CAVITY BOX
REV NO: UCP2008-2953
DRAWN: C. STEWART 2008/06/24
CHKD: F. SMITH 2008/07/01
APPR: F. SMITH 2008/07/02

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	±.005	±.0005
3 PLACES ±	±.013	±.01
2 PLACES ±	±.025	±.005
1 PLACE ±	±.050	±.010

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

SCALE

INCH

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

DRAWN BY
PEREZ-ARGUET 1988/02/25

CHECKED BY
PATEL 1988/02/25

APPROVED BY
LENZ 1988/02/25

TITLE
(2.54)/.100 HOUSING FOR
KK CRIMP TYPE TERMINALS
2695 SERIES DRAWING

MATERIAL NO.
SD-2695

DOCUMENT NO.

SHEET NO.
1 OF 3

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1		
	2695-NC*																					
	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	
M	N/A	2695-1C																				M
		2695-2C																				
		2695-3C																				
		2695-4C																				
		2695-5C																				
		2695-6C																				
L		2695-7C																				L
		2695-8C																				
		2695-9C																				
		2695-10C																				
		2695-11C																				
		2695-12C																				
K		2695-13C																				K
		2695-14C																				
		2695-15C																				
		2695-16C																				
		2695-17C																				
		2695-18C																				
		2695-19C																				
J		2695-20C																				J
		2695-21C																				
		2695-22C																				
		2695-23C																				
		2695-24C																				
		2695-25C																				
I		2695-26C																				I
		2695-27C																				
		2695-28C																				
		2695-29C																				
		2695-30C																				
		2695-31C																				
H		2695-32C																				H
		2695-33C																				
		2695-34C																				
		2695-35C																				
		2695-36C																				
		2695-37C																				
		2695-38C																				
G		2695-39C																				G
		2695-40C																				
F																						F
E																						E
D																						D
C																						C
B																						B
A																						A

UPDATE TITLE BLOCK
EC NO: UCP-2006-1024
DRAWN BY: 2005/11/04
CHKD: SCHMIDT 2005/11/02
APPROVED: TH 2005/11/02
REV

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

SIZE
D

DRMENSION STYLE
MM/IN

DRAWN BY: DATE
SAMI EC 1989/10/30
CHECKED BY: DATE
PATEL 1989/10/30
APPROVED BY: DATE
LENZ 1989/10/30

MATERIAL NO.
SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE
--- INCH

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
(2.54)/.100 HOUSING FOR
KK CRIMP TYPE TERMINALS
2695 SERIES DRAWING
MOLEX INCORPORATED

DOCUMENT NO.
SD-2695

SHEET NO.
3 OF 3

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

UPDATE TITLE BLOCK

REC NO: UCP2006-1024

DESIGNER: KIRWNAUER

CHKDLSCHMIT

APPROVED: H

REV

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± ---

2 PLACES ± --- ± ---

1 PLACE ± --- ± ---

ANGULAR ±1/2°

DIMENSION STYLE

MM/IN

DRAWN BY: DATE

CHECKED BY: DATE

APPROVED BY: DATE

MATERIAL NO.

DOCUMENT NO.

SIZE D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

(2.54)/100 HOUSING FOR KK CRIMP TYPE TERMINALS 2695 SERIES DRAWING

MOLEX MOLEX INCORPORATED

SD-2695

SHEET NO. 3 OF 3