



**Bestückungsplan / contact layout**

■ bestückt / assemble

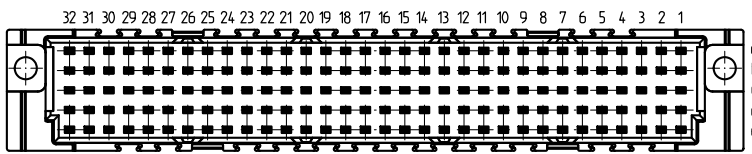

**Leiterplatten-Lochbild / PCB drillhole pattern**

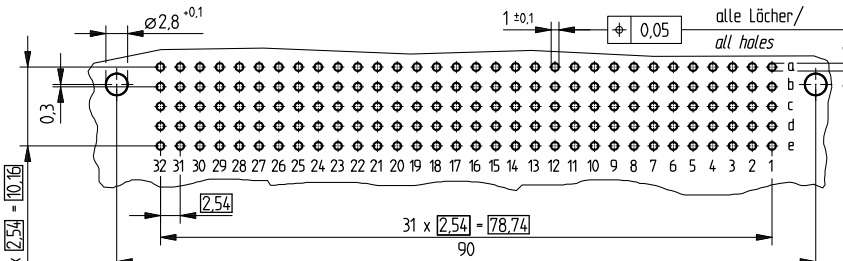

Tauchtöttschluf 0,65 x 0,3 mm / solder terminal 0,65 x 0,3 mm

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

|   |  |                          |   |   |
|---|--|--------------------------|---|---|
| Information:<br>Halteise auf Pos. a1, a2, e31, e32<br>retaining loop at pos. a1, a2, e31, e32 | Tolerances   | <br>All Dimensions in mm | Scale   | 2:1   |
|   | All rights reserved.<br>Only for information.<br>To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using. |                          | Subject to modification without prior notice.<br>Drawing will not be updated. | Designation<br><b>Federleiste E 160 Löt</b><br><b>Fem. Connector E 160 Solder</b> |
| b<br>Index  | 21.09.2009<br>Date   | www.ERNI.com             | 284313  | I<br>STVE   |
| Consider protection memo from DIN 54  |  | H00068425.SZA            |   |   |