



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
EH			D	REV ECO-06-019788	19SEP06	GG	CC
			E	REV ECO-07-022327	04OCT07	LH	JG

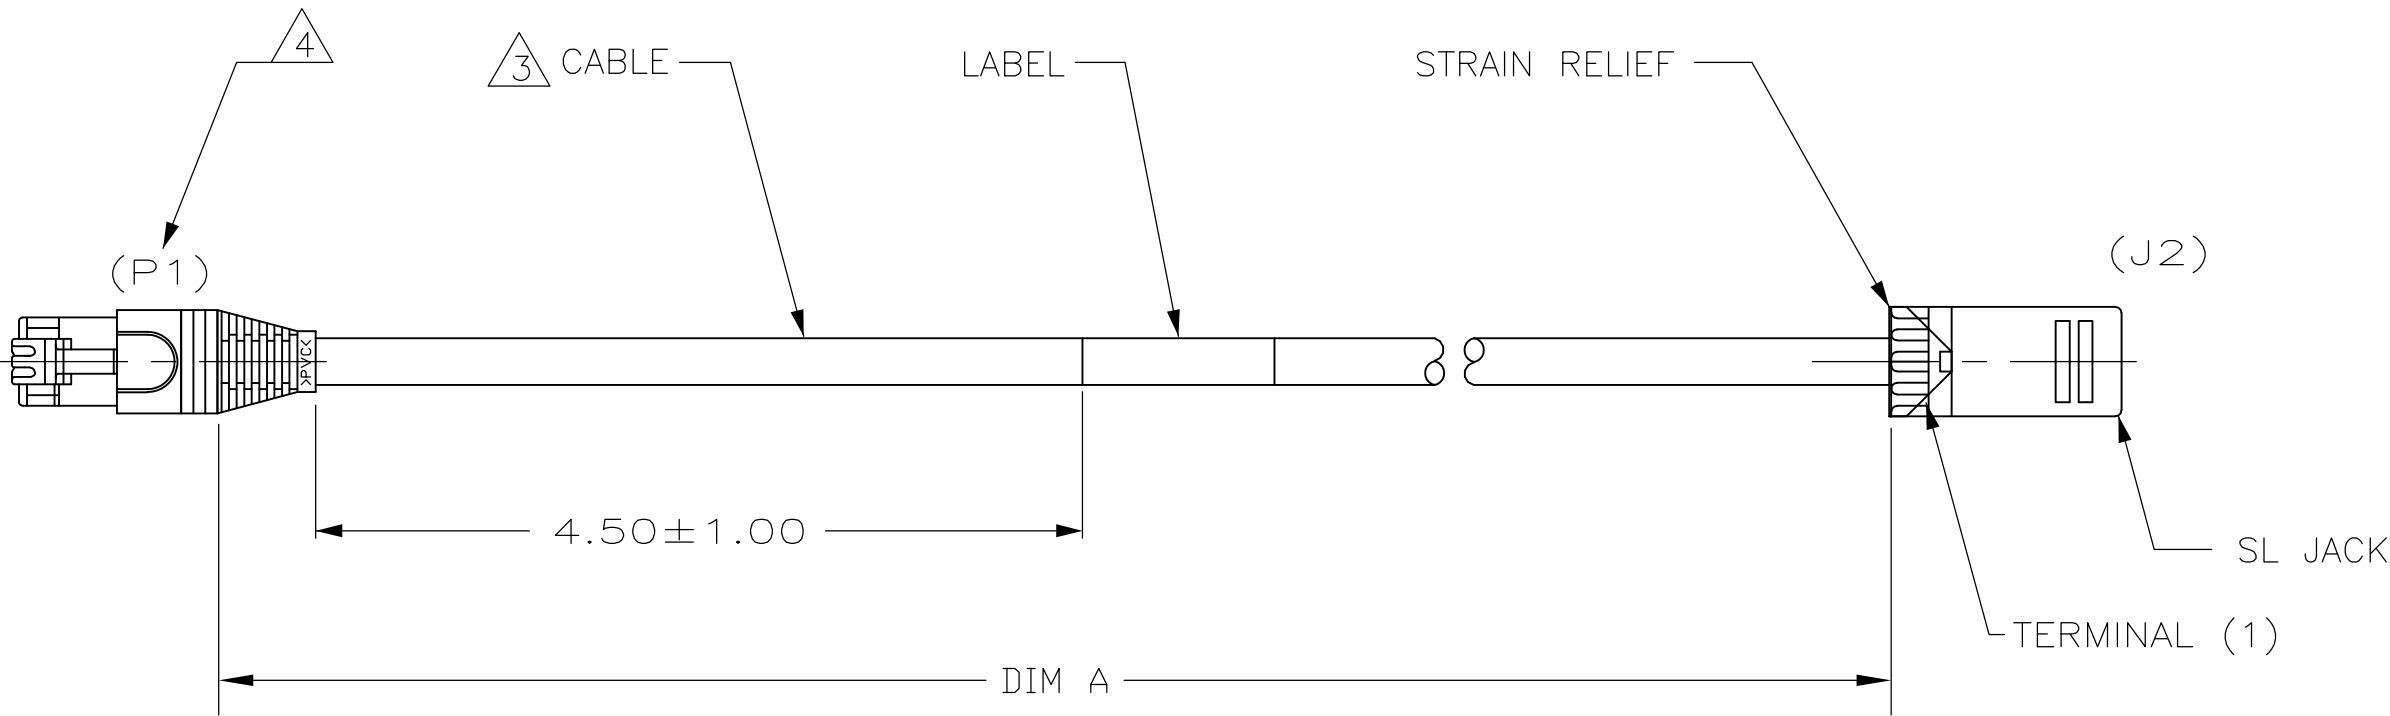

1. ONE CABLE PACKAGED IN A CLEAR POLY BAG.
2. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. CABLE: UNSHIELDED 23 AWG, 4 TWISTED PAIRS, SOLID CONDUCTORS, 100 OHMS, CAT 6, RISER RATED.
4. DESIGNATIONS IN PARENTHESES () ARE FOR REFERENCE ONLY.
5. FOR LENGTHS LESS THAN 40 FEET TIA/EIA 568-B.2 CHANNEL LIMITS SHALL BE USED FOR TESTING SYSTEM PERFORMANCE.

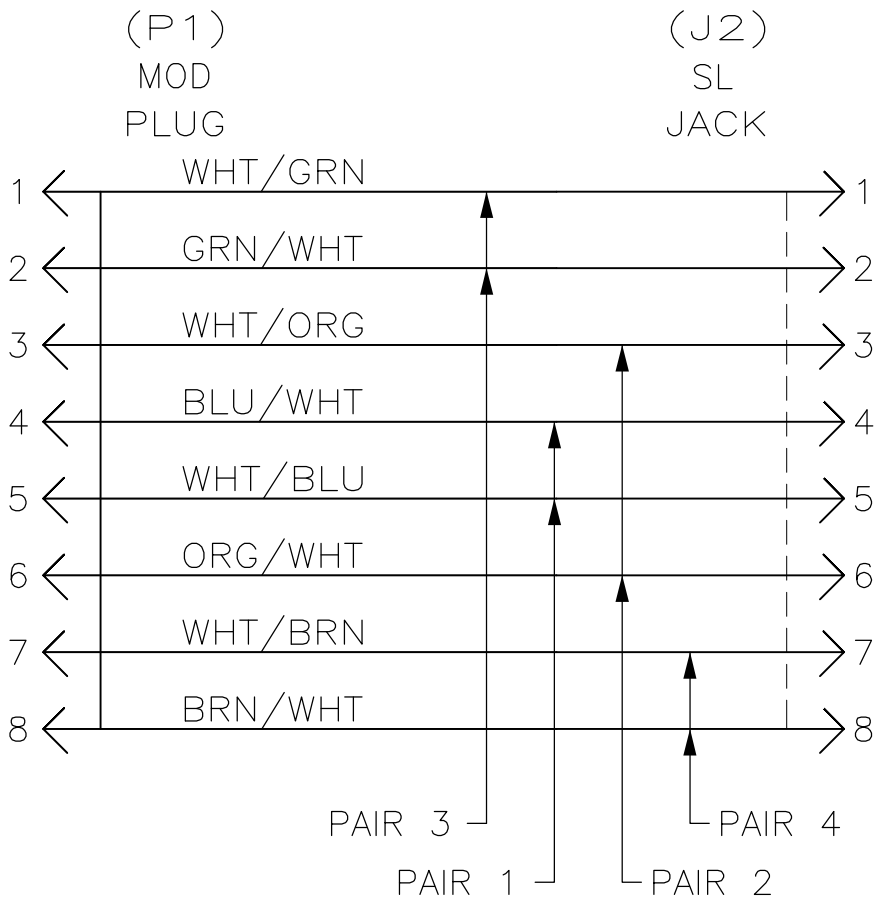

WIRING DIAGRAM
T568A

OBSOLETE	10	120.00–124.00	219596–5
	50	600.00–604.00	219596–4
	40	480.00–484.00	219596–3
	30	360.00–364.00	219596–2
	20	240.00–244.00	219596–1
	FEET, REF	DIM A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	29MAR01	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA., 17105–3608			
		CHK	29MAR01				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ±		CABLE ASSY, MOD PLUG/SL JACK, GRAY, 568A			
MATERIAL		FINISH		APVD	29MAR01	SIZE	RESTRICTED TO
				PRODUCT SPEC		CAGE CODE	
				APPLICATION SPEC		DRAWING NO	
				WEIGHT		219596	
				CUSTOMER DRAWING		SCALE	REV
						NTS	E