

## Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Preassembled relay modules with spring-cage connection, consisting of: relay base, power contact relay, pluggable display or interference suppression module and retaining bracket. Input voltage: 24 V DC, 1 PDT, 10 A

### Why buy this product

- Safe isolation between coil and contact side
- Logical contact arrangement thanks to 1/3-level relay base
- Operational reliability thanks to sealed relay



### Key Commercial Data

Packing unit	1 STK
Minimum order quantity	5 STK
GTIN	 4 046356 044295
GTIN	4046356044295
Weight per Piece (excluding packing)	66.060 g
Custom tariff number	85364900
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	16 mm
Height	97 mm
Depth	72 mm

# Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

## Technical data

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C

### Coil side

Nominal input voltage $U_N$	24 V DC
Typical input current at $U_N$	19 mA
Typical response time	8 ms
Typical release time	10 ms
Protective circuit	Damping diode
Operating voltage display	Yellow LED
Power dissipation for nominal condition	0.46 W

### Contact side

Contact type	1 PDT
Type of switch contact	Single contact
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 10 mA)
Min. switching current	10 mA (at 12 V)
Maximum inrush current	30 A (300 ms)
Limiting continuous current	10 A
Interrupting rating (ohmic load) max.	3000 W (for 250 V AC)
	50 W (at 110 V DC)
	80 W (at 220 V DC)
	288 W (at 24 V DC)
	at 440 V AC
	58 W (at 48 V DC)
	48 W (at 60 V DC)
Switching capacity in acc. with DIN VDE 0660/IEC 60947	2 A (at 24 V, DC13)
	0.2 A (at 110 V, DC13)
	0.2 A (at 250 V, DC13)
	6 A (at 24 V, AC15)
	6 A (at 120 V, AC15)
	6 A (at 250 V, AC15)

### General

Test voltage relay winding/relay contact	4 kV (50 Hz, 1 min.)
Operating mode	100% operating factor
Mechanical service life	3 x 10 <sup>7</sup> cycles

# Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

## Technical data

### General

Mounting position	any
Assembly instructions	In rows with zero spacing

### Connection data input side

Connection name	Coil side
Connection method	Spring-cage connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16

### Standards and Regulations


Standards/regulations	IEC 60664
	EN 50178
Degree of pollution	3
Overvoltage category	III
Assembly instructions	In rows with zero spacing
Mounting position	any

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings

Circuit diagram



DC coils


Diagram

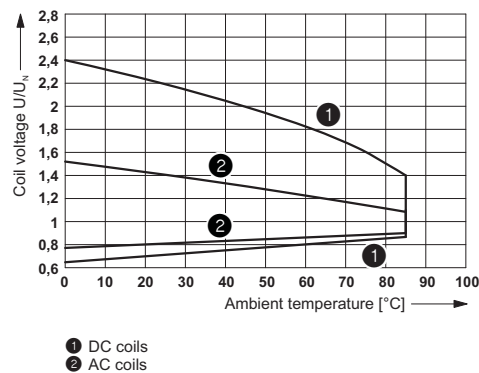


Operating voltage range of the relay

# Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

Diagram

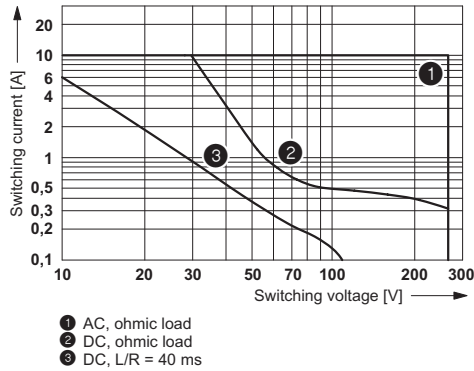


Diagram

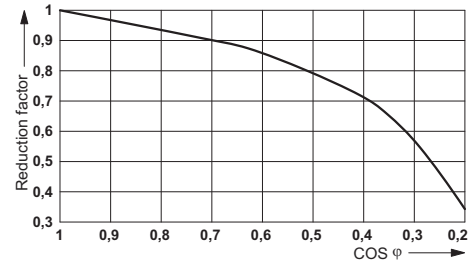

Interrupting rating

Service life reduction factor with various cos phi

Diagram

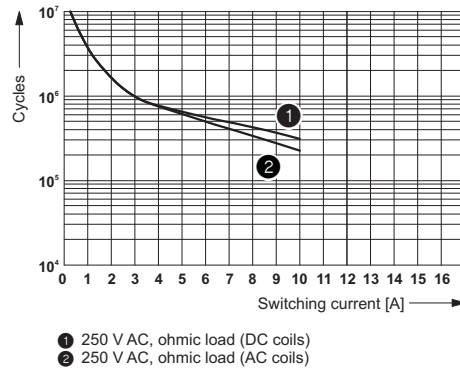

Electrical service life

Articles in set

Relay base - PR1-BSP3/2X21 - 2833534



Relay base PR1..., for miniature power relay or miniature switching relay with 1 or 2 PDT or solid-state relay of same construction, 1/3 level design, spring-cage connections, connection facility for input/interference suppression modules

# Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

## Articles in set

Single relay - REL-MR- 24DC/21HC - 2961312



Plug-in miniature power relay, with power contact for high continuous currents, 1 PDT, input voltage 24 V DC

Plug-in module - LDP- 12- 24DC - 2833657



Plug-in module, with freewheeling diode and yellow LED, polarity: A1+, A2-, input voltage: 12 ... 24 V DC  $\pm 20\%$

Retaining bracket - EL1-P16 - 2833547



Relay retaining bracket, with eject function and integrated equipment marking area (7.5 x 15 mm), to suit relay base PR1, for 16 mm high miniature power relay and solid-state relay

## Classifications

### eCl@ss

eCl@ss 5.0	27371601
eCl@ss 5.1	27371601
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601
eCl@ss 9.0	27371601

### ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437

# Relay Module - PR1-RSP3-LDP-24DC/21 - 2834407

## Classifications

### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334

## Approvals

### Approvals

---

#### Approvals

EAC

---

#### Ex Approvals

---

### Approval details

EAC		RU C- DE.A*30.B.01082
-----	---	--------------------------

---