
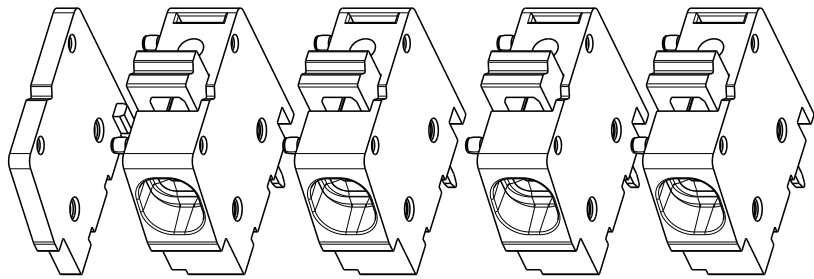
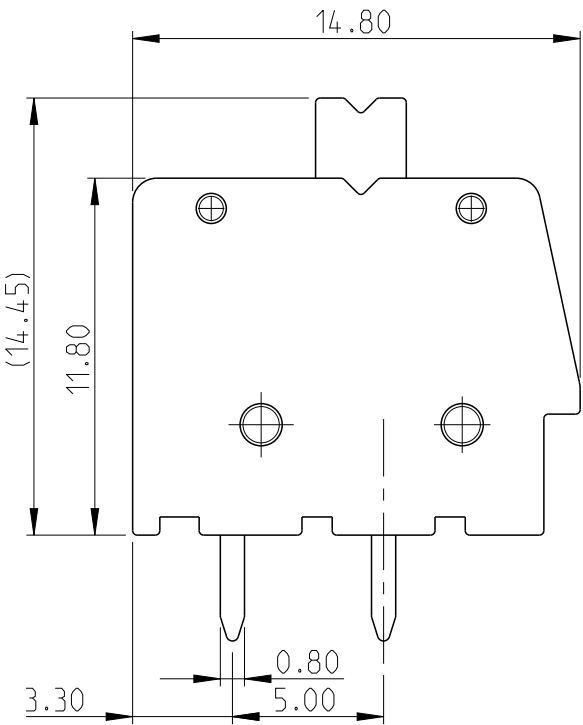


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		B1	HOUISNG MATERIAL DETAIL ADDED	05DEC 2014	PS	JK

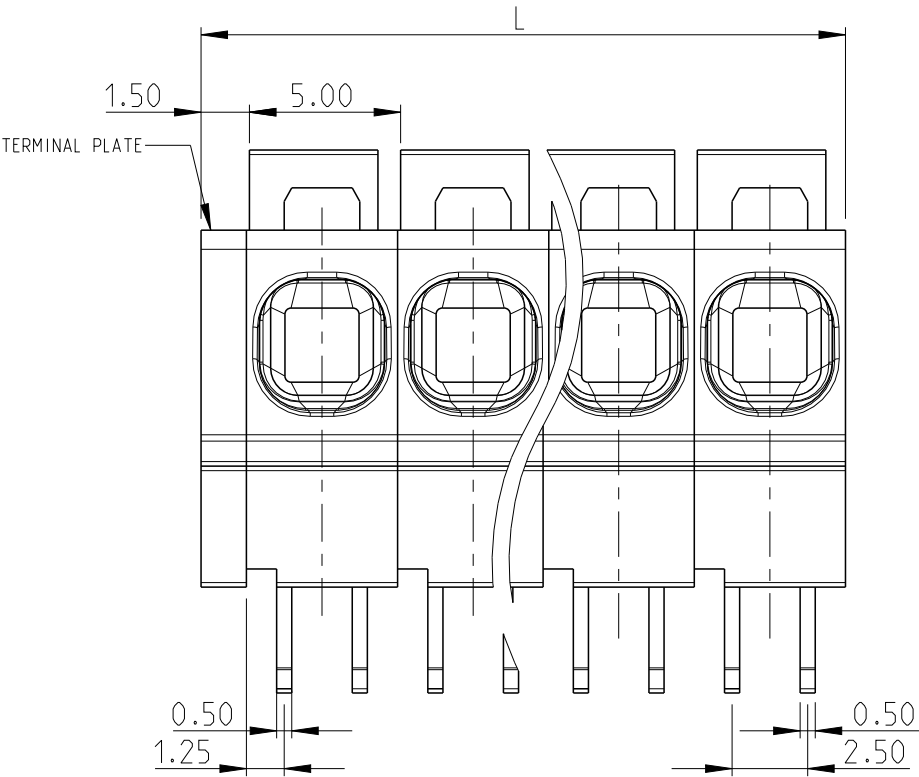

SCALE 2:1
-4 AS SHOWN



1	SEE FIG	46.50	9	2-1986711-6
		126.50	25	2-1986711-5
		121.50	24	2-1986711-4
		116.50	23	2-1986711-3
		111.50	22	2-1986711-2
		106.50	21	2-1986711-1
		101.50	20	2-1986711-0
		96.50	19	1-1986711-9
		91.50	18	1-1986711-8
		86.50	17	1-1986711-7
		81.50	16	1-1986711-6
		76.50	15	1-1986711-5
		71.50	14	1-1986711-4
		66.50	13	1-1986711-3
		61.50	12	1-1986711-2
		56.50	11	1-1986711-1
		51.50	10	1-1986711-0
		46.50	9	1986711-9
		41.50	8	1986711-8
		36.50	7	1986711-7
		31.50	6	1986711-6
		26.50	5	1986711-5
		21.50	4	1986711-4
		16.50	3	1986711-3
		11.50	2	1986711-2
		"L"	POLE	PART NO

1 PRELIMINARY PART

MATERIALS:
HOUSING - PA66-UL94 V0, COLOR - GREEN
CLAMPING SPRING - STEEL
PIN - COPPER ALLOY - TIN PLATED

MECHANICAL
PCB THICKNESS - 2.40 MAX
PCB HOLE DIAMETER - 1.20 MIN
STRIP LENGTH - 10-11 MM
OPERATING TEMPERATURE - -40 °C TO +110 °C


ELECTRICAL
WIRE RANGE- 30 TO 12 AWG
VOLTAGE RATING- 300 VOLTS
CURRENT RATING-16 AMP
CONTACT RESISTANCE-15 MILLOHM MAX
INSULATION RESISTANCE-10⁹ OHMS MIN (500V DC)

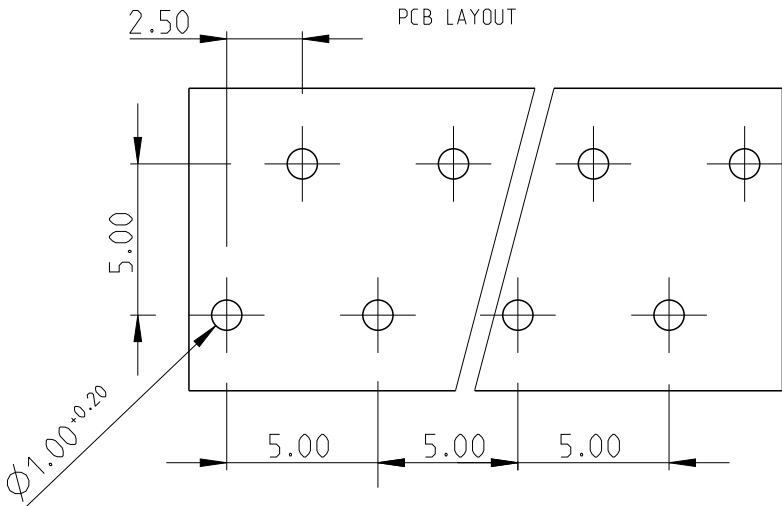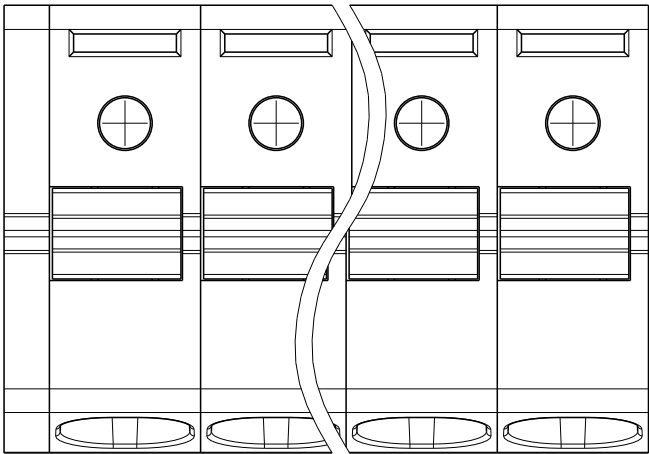


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08AUG2011 RAGHAVENDRA	TE Connectivity SPRING TYPE. SIDE WIRE ENTRY TERMINAL BLOCK SIDE STACKABLE STRAIGHT 02 - 25 POLES PITCH 5.00mm			
DIMENSIONS: mm		CHK 08AUG2011 SARVER MICHAEL				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 08AUG2011 SARVER MICHAEL	NAME			
0 PLC ±0.5		PRODUCT SPEC	SIZE			
1 PLC ±0.25		APPLICATION SPEC	CAGE CODE			
2 PLC ±0.25		WEIGHT	DRAWING NO			
3 PLC ±0.25		CUSTOMER DRAWING	RESTRICTED TO			
4 PLC ±0.25			SCALE			
ANGLES ±1°			SHEET			
FINISH			OF			
MATERIAL SEE NOTES			REV			
			B1			

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	2011
© COPYRIGHT 2011	-	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
FT	0		-	SEE SHEET 1	-	-

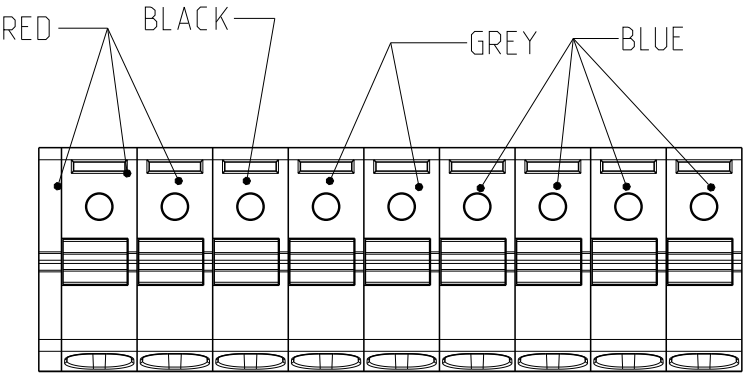

2-1986711-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA 08AUG2011	 TE Connectivity					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 	CHK SARVER MICHAEL 08AUG2011						
		APVD SARVER MICHAEL 08AUG2011	NAME SPRING TYPE. SIDE WIRE ENTRY TERMINAL BLOCK SIDE STACKABLE STRAIGHT 02 - 25 POLES PITCH 5.00mm					
	0 PLC ±-	PRODUCT SPEC	SIZE A3			CAGE CODE 00779	DRAWING NO C-1986711	RESTRICTED TO -
	1 PLC ±0.5	-						
	2 PLC ±0.25	APPLICATION SPEC						
	3 PLC ±-	-						
4 PLC ±-		WEIGHT						
ANGLES ±1°								
MATERIAL -	FINISH -							
CUSTOMER DRAWING			SCALE 4:1		SHEET 2		OF 2	REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1986711-5](#)