


# UMK- F32M/S-VS


Order No.: 2970138

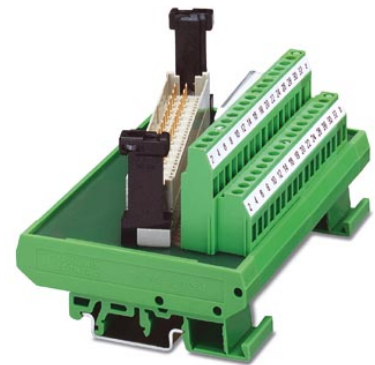

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2970138>

VARIOFACE module, for IEC 603/DIN 41612 plug connector, type F, 32-pos., angled, z, b components mounted, with male connector, cable housing with screw interlock



Commercial data	
GTIN (EAN)	 4 017918 087647
Note	Made-to-order
sales group	I021
Pack	1 pcs.
Customs tariff	85369010

#### Product notes

WEEE/RoHS-compliant since:  
07/17/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Nominal voltage $U_N$	250 V
Max. current carrying capacity per branch	4 A

Number of positions	32
Width	112.5 mm
Height	77 mm
Depth	62.5 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	2 kV (50 Hz, 1 min.)
Mounting position	Any
Standards/regulations	DIN VDE 0110

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	IEC 603/DIN 41612 connection
Connection method	Pluggable

#### Certificates / Approvals



Certification

GOST

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;