

S-PT-EX(I)-24DC-3/4"

Order No.: 2882585



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2882585>

Surge protection in the IP67 screw-on module for measuring sensors in intrinsically safe circuits, direct mounting with 3/4" NPT outer thread, cable gland for the signal cable, two-stage protective circuit. HART-compatible.



Commercial data

GTIN (EAN)	 4 046356 098076
Note	Made-to-order
sales group	J331
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 112 (TT-2009)

Product notes

WEEE/RoHS-compliant since:
05/24/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing material	Zinc die-cast
Color	silver

Standards for air and creepage distances	IEC 60664-1: 1992-10
	EN 60079-0
	EN 60079-11
Ambient temperature (operation)	-40 °C ... 50 °C
Mounting type	Direct screw connection
Design	Screw-in module
Number of positions	3
Degree of protection	IP67
Direction of action	Line-Line & Line-Earth Ground
Width	34.00 mm
Height	148.00 mm
Length	34.00 mm
Protective circuit	
IEC category	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_C	30 V DC
	21 V AC
Maximum continuous voltage U_C (wire-wire)	30 V DC
	21 V AC
Nominal current I_N	350 mA (50°C)
Operating effective current I_C at U_C	$\leq 10 \mu A$
Ground conductor current I_{PE}	$\leq 2 \mu A$
Nominal discharge surge current I_n (8/20) μs (Core-Core)	10 kA
Nominal discharge surge current I_n (8/20) μs (Core-Earth)	10 kA
Nominal discharge surge current I_n (8/20) μs (Shield-Earth)	10 kA (optional)
Max. discharge surge current I_{max} (8/20) μs maximum (Core-Core)	10 kA
Max. discharge surge current I_{max} (8/20) μs maximum (Core-Earth)	10 kA
Max. discharge surge current I_{max} (8/20) μs maximum (Shield-Earth)	10 kA

Nominal pulse current I_{an} (10/1000) μ s (Core-Core)	30 A
Nominal pulse current I_{an} (10/1000) μ s (Core-Earth)	100 A
Nominal pulse current I_{an} (10/1000) μ s (Shield-Earth)	100 A
Lightning test current (10/350) μ s, peak value I_{imp}	1 kA
Output voltage limitation at 1 kV/ μ s (Core-Core) spike	≤ 50 V
Output voltage limitation at 1 kV/ μ s (Core-Earth) spike	≤ 1.4 kV (Direct grounding)
Output voltage limitation at 1 kV/ μ s (Shield-Earth) spike	≤ 600 V (optional)
Output voltage limitation at 1 kV/ μ s (Core-Core) static	≤ 50 V
Output voltage limitation at 1 kV/ μ s (Core-Earth) static	≤ 1.4 kV (Direct grounding)
Residual voltage at I_n , (conductor-conductor)	≤ 50 V
Residual voltage with I_{an} (10/1000) μ s (conductor-conductor)	≤ 50 V
Protection level U_p (Core-Core)	≤ 55 V (C2 -5 kA)
	≤ 50 V (C1 - 250 A)
	≤ 50 V (C3 - 25 A)
	≤ 80 V (D1 - 1 kA)
Protection level U_p (Core-Earth)	≤ 1.4 kV (C2 -5 kA, direct grounding)
	≤ 1.4 kV (C1 - 500 A)
	≤ 1.4 kV (C3 - 100 A)
	≤ 1.4 kV (D1 - 1 kA)
Protection level U_p (Shield-Earth)	≤ 650 V (C2 -5 kA optional)
Response time t_A (Core-Core)	≤ 1 ns
Response time t_A (Core-Earth)	≤ 100 ns
Response time t_A (Shield-Earth)	≤ 100 ns
Input attenuation a_E , sym.	Typ. 0.5 dB (≤ 1 MHz / 50 Ω)
	Typ. 0.2 dB (Up to 400 kHz, 150 Ω)
Cut-off frequency f_g (3 dB), sym. in 50 Ohm system	Typ. 6 MHz
Cut-off frequency f_g (3 dB), sym. in 150 Ohm system	Typ. 2.5 MHz
Resistance in series	2.2 $\Omega \pm 10$ %

Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C2 (10 kV/5 kA)
	D1 (1 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
	D1 (1 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Shield-Earth)	C2 (10 kV/5 kA)
	D1 (1 kA)
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth)	10 A - 1 s
Alternating current carrying capacity in acc. with IEC 61643-21 (Shield-Earth)	10 A - 1 s

Connection data

Connection name	Input/output
Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Connection line
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.6 Nm
Stripping length	6 mm
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	16

Connection, protective circuit

Standards/regulations	DIN EN 61643-21
	EN 60079-0
	EN 60079-11
	EN 60079-26

General

Maximum inner capacitance C_i	2 nF
Maximum inner inductance L_i	1 μ H

Max. input current I_i	350 mA (T4, T5, T6/≤ 50°C)
Max. input voltage U_i	30 V
Maximum input power P_i	3 W

Conformity / approvals


ATEX	Ex II 1G Ex ia IIC T4...T6 Ga
IECEX	Ex ia IIC T4...T6 Ga

Certificates / Approvals


Certification	UCIEE
Certification Ex:	KEMA-EX

Diagrams/Drawings

Dimensioned drawing

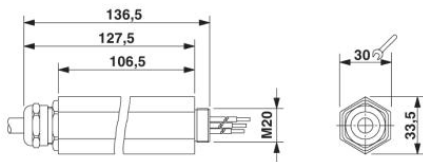

Circuit diagram

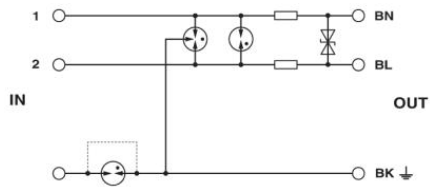

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;