


COIL: @ +25 °C
 RESISTANCE 600 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 15 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6.0 MS MAX.
RELEASE 3.0 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

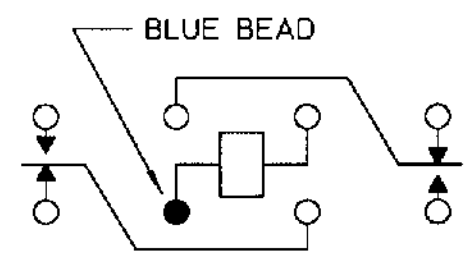

CONTACT RATING: LOW LEVEL TO 5A
30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 7/17/96 CK. 7/17/96



CUST. HI-G
 CUST. NO. 2BN-1D-126

TYPE FW5A RELAY

FW5A1167S01