




Extract from the online
catalog

REL-MR-G 24/1

Order No.: 2961037

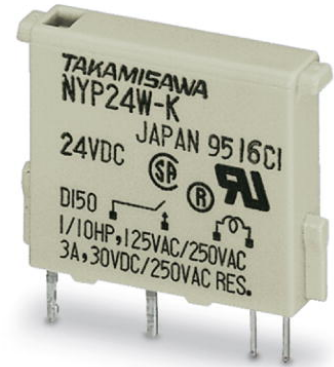

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961037>

Pluggable replacement miniature relay, 1 N/O contact, input voltage
24 V DC

Commercial data

EAN	4017918087074
Pack	8 pcs.
Customs tariff	85364190
Weight/Piece	0.00675 KG
Catalog page information	Page 246 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
07/25/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Nominal input current at U_{IN}	5 mA
Typical response time	5 ms
Typical release time	2 ms

REL-MR-G 24/1 Order No.: 2961037
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961037

Coil resistance	4800 $\Omega \pm 10\%$
-----------------	------------------------

Contact side

Contact type	Double contact, 1 N/O contact
Contact material	AgNi 90/10, + 5 μm hard gold-plated
Maximum switching voltage	250 V AC 125 V DC
Minimum switching voltage	5 V DC
Maximum inrush current	5 A
Min. switching current	1 mA
Limiting continuous current	3 A
Interrupting rating (ohmic load) max.	72 W (for 24 V DC) 60 W (for 48 V DC) 50 W (for 60 V DC) 50 W (for 110 V DC) 750 VA (for 230 V AC)

General data

Width	5 mm
Height	17 mm
Depth	23 mm
Test voltage relay winding/relay contact	2 kV AC (50 Hz, 1 min)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Operating mode	100% operating factor
Service life mechanical	Approx. 2×10^7 cycles
Standards/regulations	DIN VDE 0110 IEC 255/DIN VDE 0435 (in relevant parts)
Mounting position	Any

Certificates / Approvals




Certification

GOST

REL-MR-G 24/1 Order No.: 2961037
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961037>

Drawings

Circuit diagram

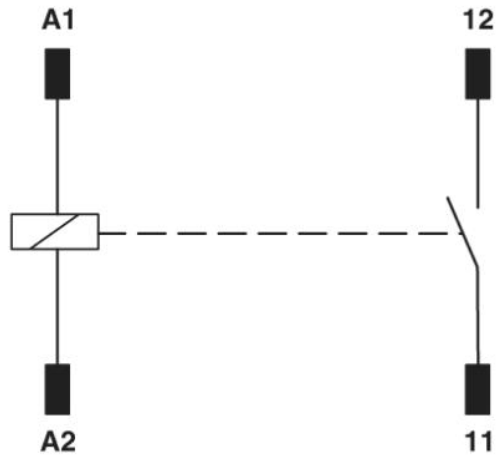

Schematic diagram



REL-MR-G 24/1 Order No.: 2961037
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961037>

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com