

REV. 0
DCO 17004


COIL: @ 25°C	320 OHMS ±10%
RESISTANCE	
NOMINAL VOLTAGE	12.0-15.0 VDC
MUST OPERATE	6.8 VDC
MUST RELEASE	0.68 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6 ±1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

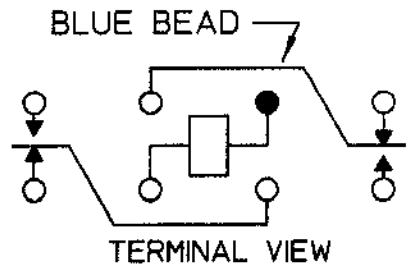

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 5/7/01 CK.TLG 05-08-01



CUST. C.II. STD.	'HFV' RELAY
CUST. NO. _____ REV. _____	

HFV1131B00