

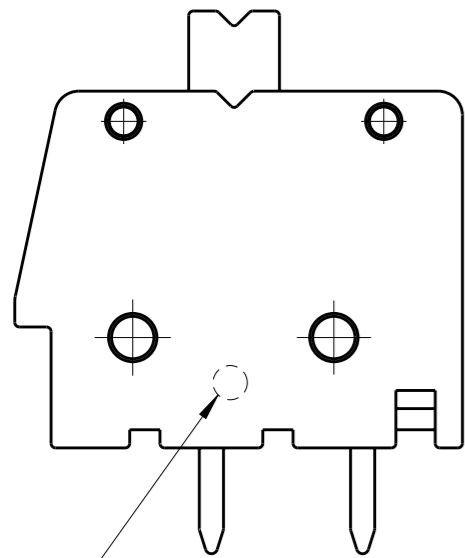
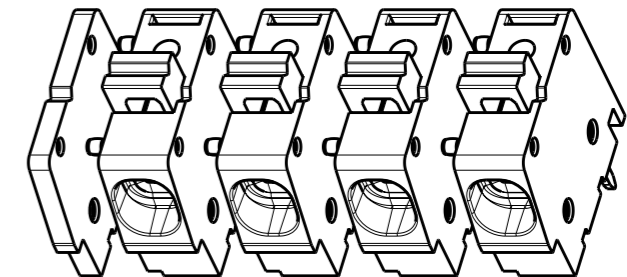



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-12-002880	14FEB12	KH	MS

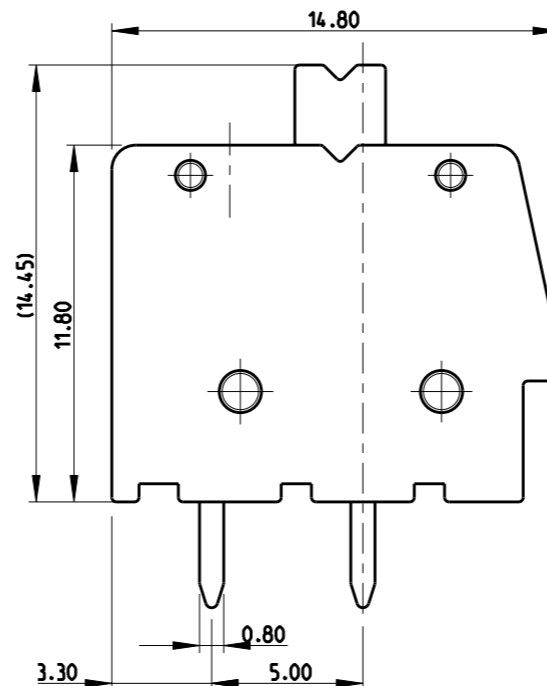

Identificazione passo imperiale

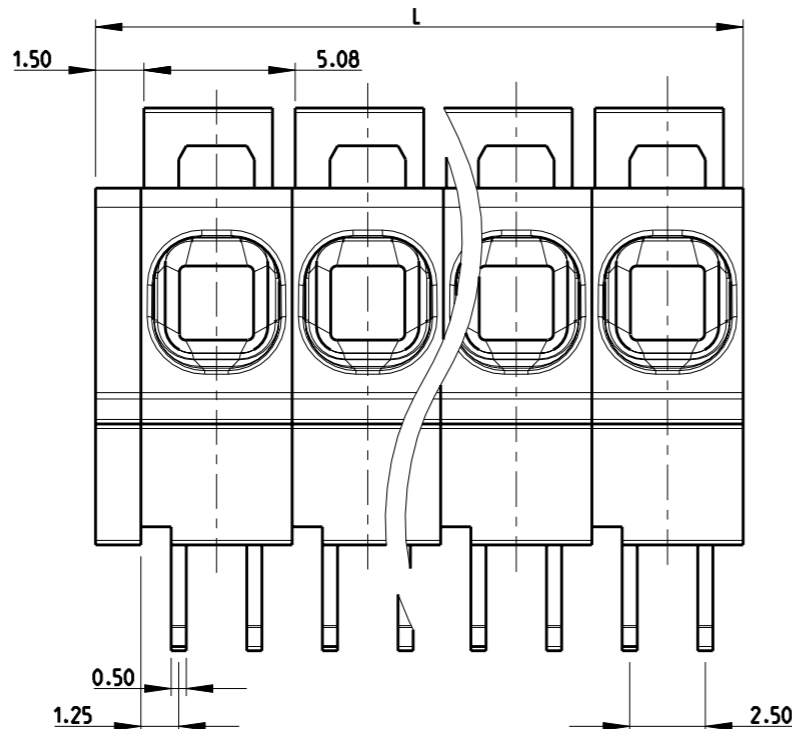

SCALE 2:1
-4 AS SHOWN

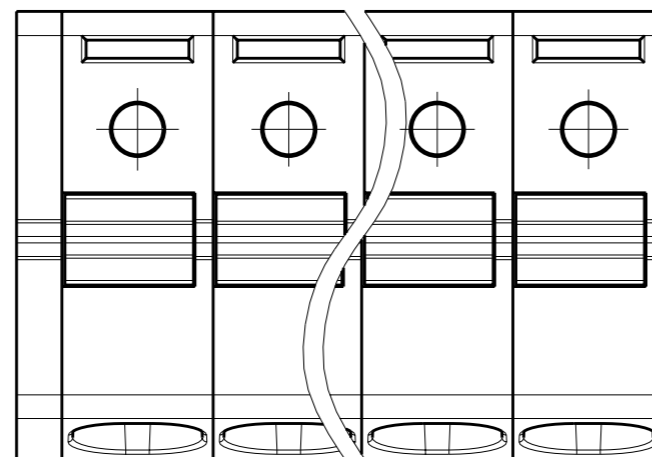


MATERIALS:
 HOUSING-POLYAMIDE, COLOR-GREEN
 CLAMPING SPRING-STEEL
 PIN-COPPER ALLOY-TIN PLATED

MECHANICAL
 PCB THICKNESS-2.40 MAX
 PCB HOLE DIAMETER-1.20 MIN
 STRIP LENGTH- 10-11 MM
 OPERATING TEMPERATURE--40 °C TO +110 °C

ELECTRICAL
 WIRE RANGE- 30 TO 12 AWG
 VOLTAGE RATING- 300 VOLTS
 CURRENT RATING-16 AMP
 CONTACT RESISTANCE-15 MILLOHM MAX
 INSULATION RESISTANCE-10⁹ OHMS MIN (500V DC)

128.50	25	2-1986712-5
123.42	24	2-1986712-4
118.34	23	2-1986712-3
113.26	22	2-1986712-2
108.18	21	2-1986712-1
103.10	20	2-1986712-0
98.02	19	1-1986712-9
92.94	18	1-1986712-8
87.86	17	1-1986712-7
82.78	16	1-1986712-6
77.70	15	1-1986712-5
72.62	14	1-1986712-4
67.54	13	1-1986712-3
62.46	12	1-1986712-2
57.38	11	1-1986712-1
52.30	10	1-1986712-0
47.22	9	1986712-9
42.14	8	1986712-8
37.06	7	1986712-7
31.98	6	1986712-6
26.90	5	1986712-5
21.82	4	1986712-4
16.74	3	1986712-3
11.66	2	1986712-2
DIM "L"	POLE	PART NO

PCB LAYOUT

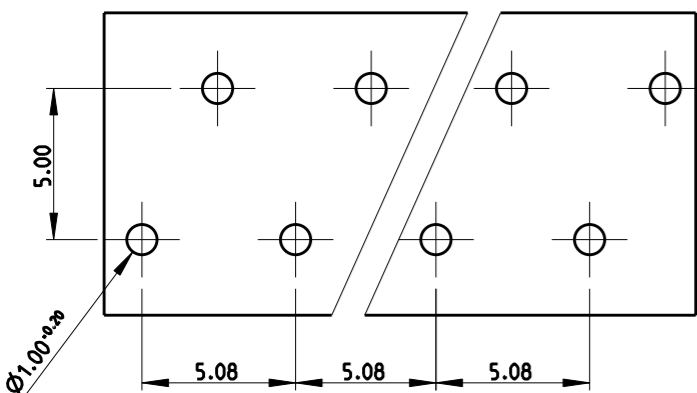

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08AUG2011	STE TE Connectivity
		CHK	08AUG2011	
		APVD	08AUG2011	
		NAME	SARVER, MICHAEL	
DIMENSIONS:		PRODUCT SPEC	SPRING TYPE, SIDE WIRE ENTRY TERMINAL	
mm		APPLICATION SPEC	SIDE STACKABLE STRAIGHT	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT	02 - 25 POLES PITCH 5.08mm	
0 PLC ±0.5			SIZE	RESTRICTED TO
1 PLC ±0.25			A3	
2 PLC ±			CAGE CODE	
3 PLC ±			00779	
4 PLC ±			DRAWING NO	
ANGLES ±1°			C-1986712	
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE	SHEET
-	-		2:1	1 OF 1
			REV	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1986712-4](#)