

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDERICK, ILLINOIS

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
2SE156-3

2SE156-3

M

DRAWING
NUMBER

X

ISSUE
4

REPLACES

RELEASE NO. SR 11485

CHECK

REVISIONS

A	03-34213	JAL	25 SEPT 74
B	CO 44646	MM	2 DEC 78
C	CO57041A	CJH	21 MAR 85

20 FEB 64

EB

CHECK

20 FEB 64


DAW

CHECK

JPH 19 FEB 64

DRAWN

FO-50378

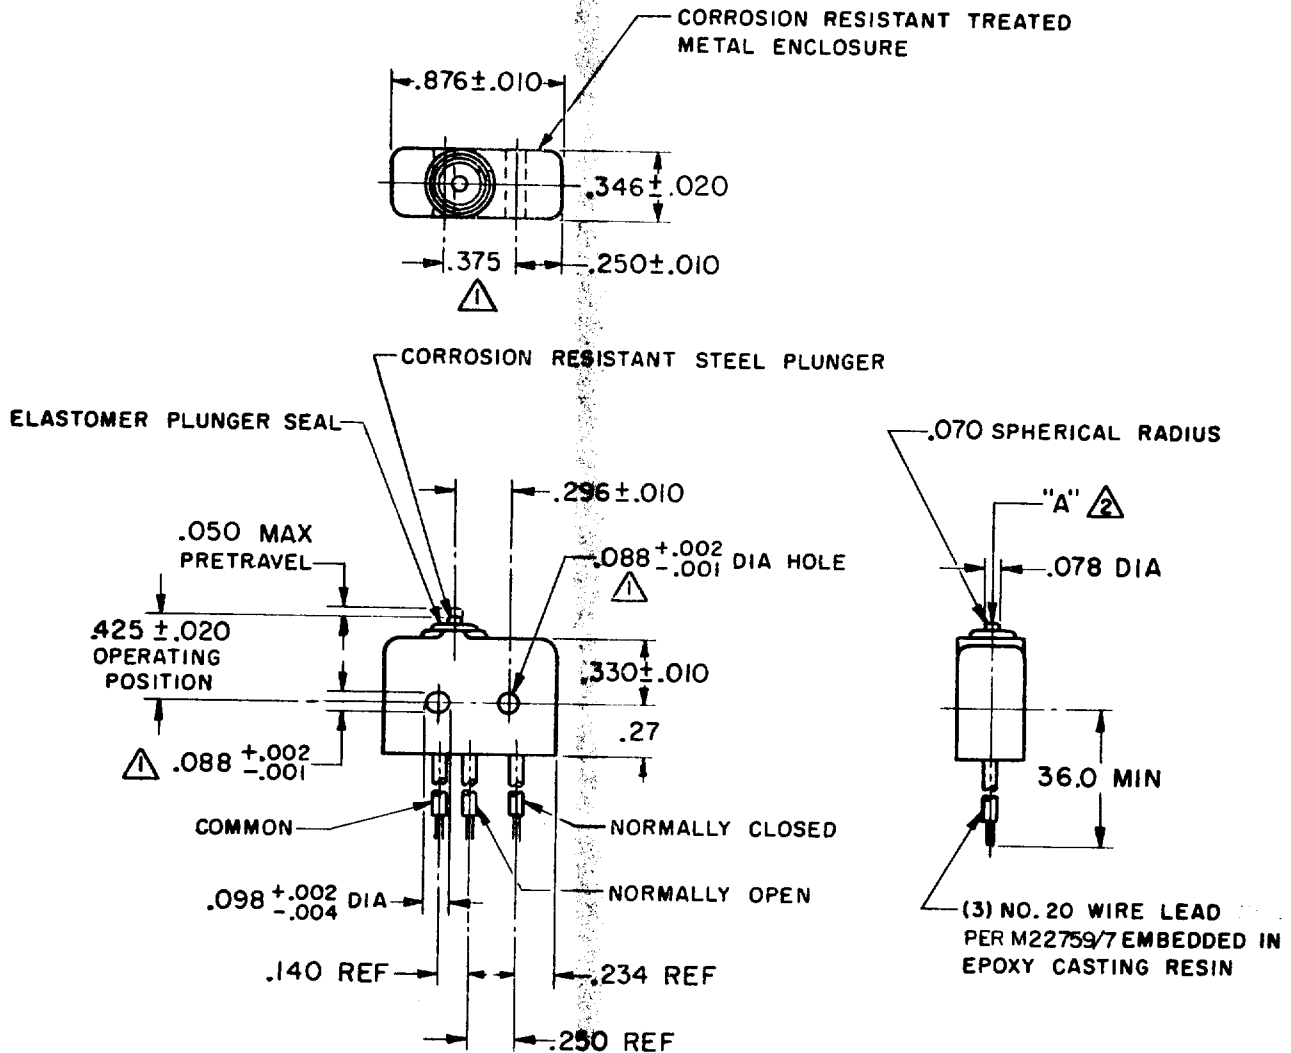

NOTE -

1. MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.375 \pm .002$ CENTERS
2. ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
3. WEIGHT OF SWITCH ONLY IS $.26$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 1.38 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	5 - 17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT	
S	P D T
250 VAC	5 AMP
30 VOLTS DC RATING	
INDUCTIVE	SEA LEVEL 3 AMP
	50,000 FT 2.5 AMP
RESISTIVE	SEA LEVEL 5 AMP
	50,000 FT 5 AMP
MAXIMUM INRUSH	24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT 3