

FO-55111-B

4

3



2

1

HONEYWELL PART NUMBER
23AC82
KC-RI634

REV	DOCUMENT	CHANGED BY	CHECK
3	0033368	BS 18JAN08	BLR

PUSH TO OPERATE-RETURNS
AUTOMATICALLY TO POSITION
SHOWN
PULL TO OPERATE-REMAINS IN
OPERATED POSITION UNTIL RESET
FOR AUTOMATIC RETURN BY NEXT
FULL STROKE "PUSH" OPERATION

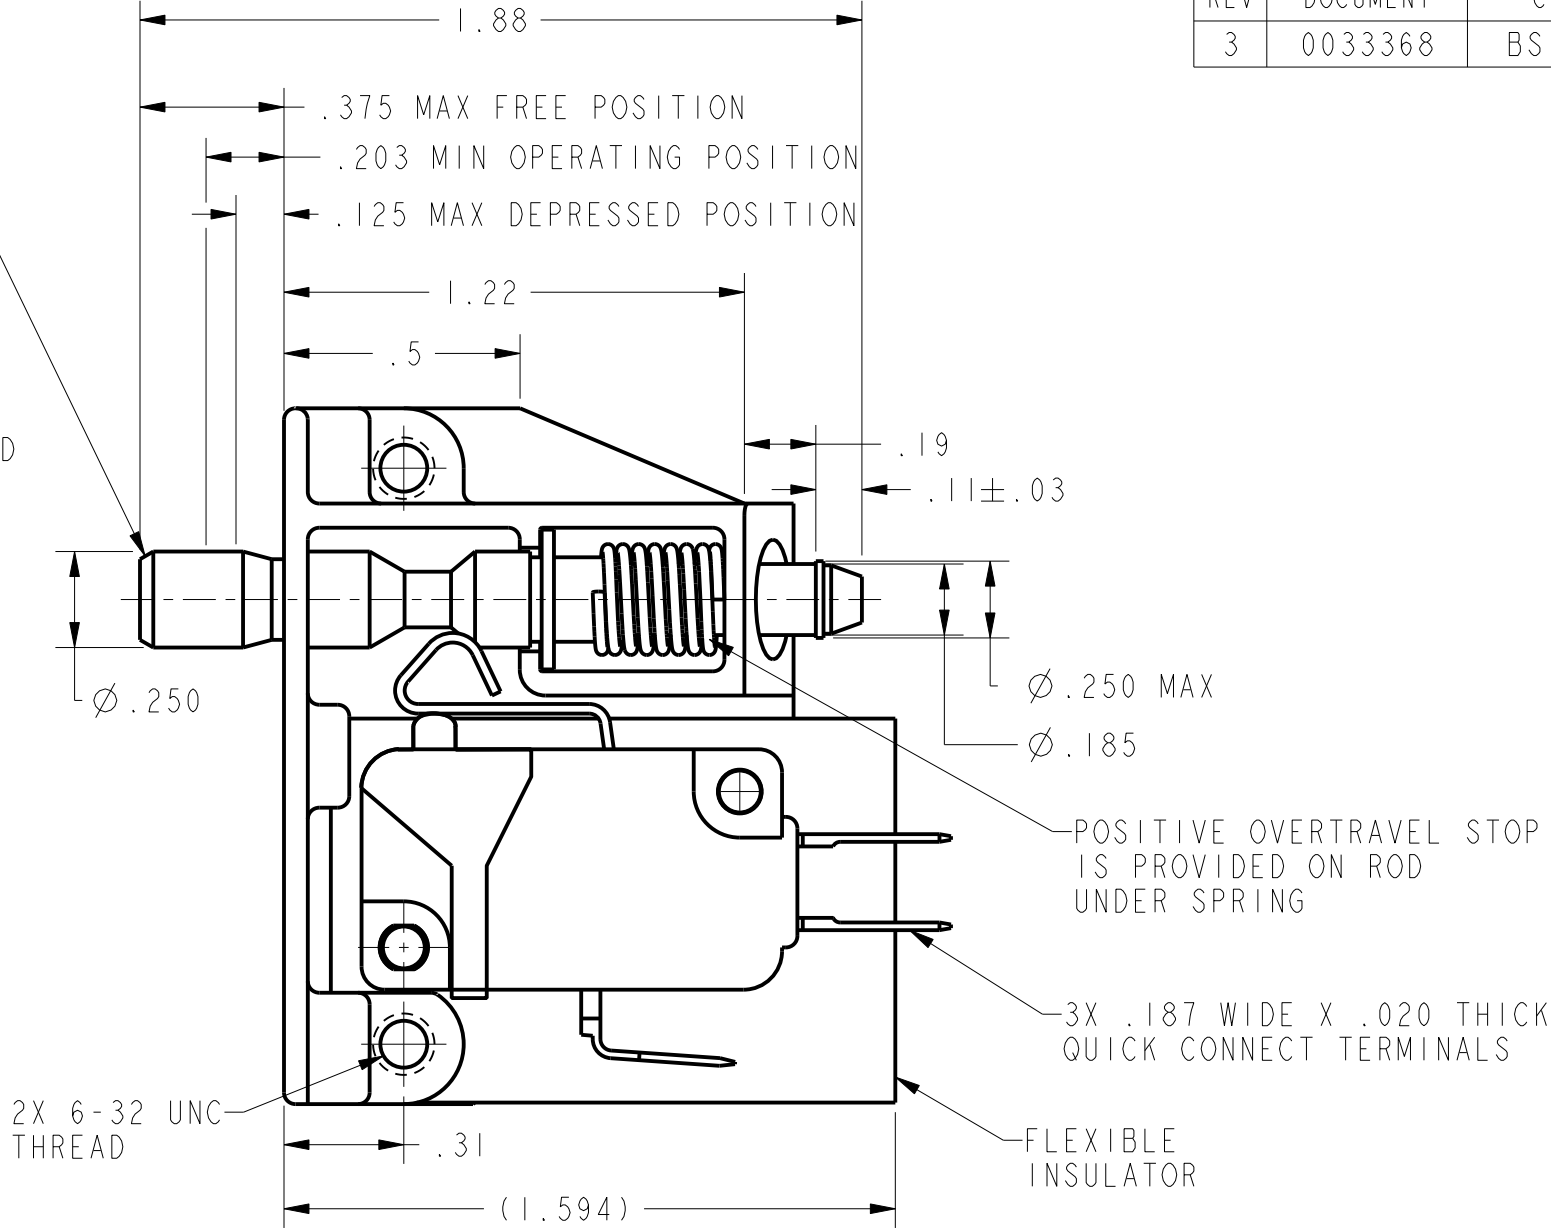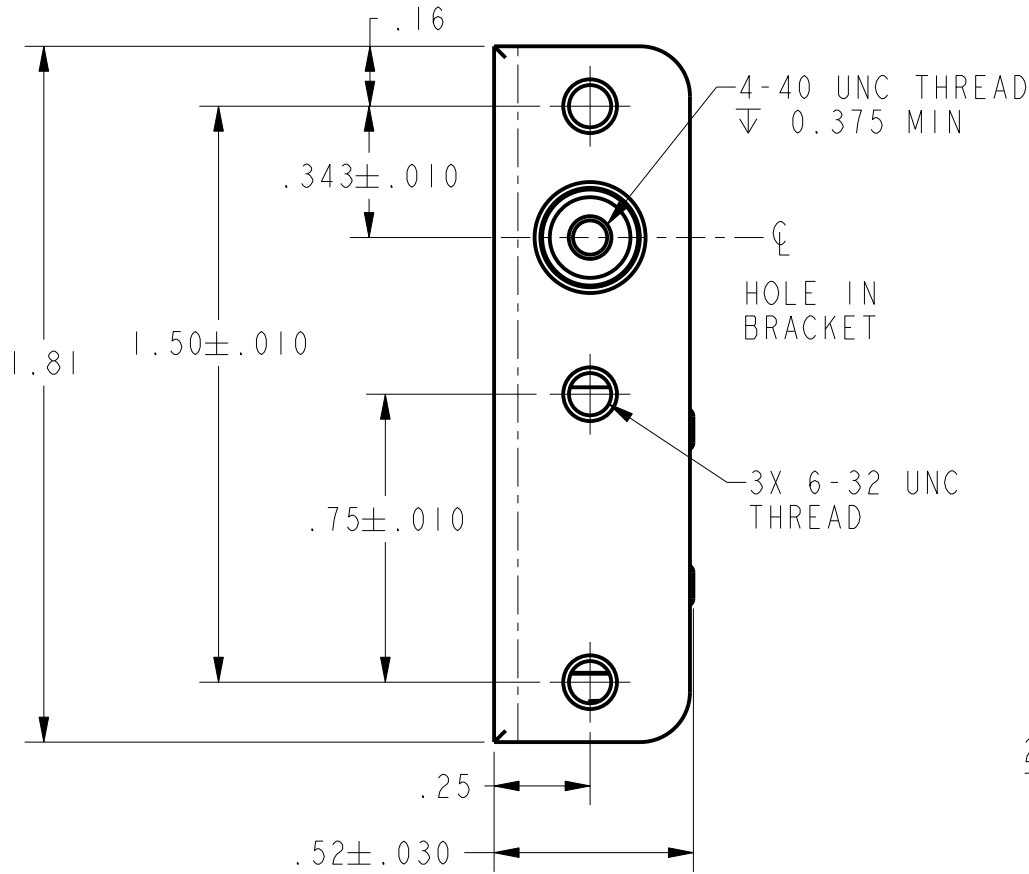

- NOTES
- 1. UNIT INCLUDES CATALOG LISTING "V7-6A17D8-296-S" BASIC SWITCH
 - 2. BASIC SWITCH PLASTIC PARTS ARE MADE OF GLASS FILLED PCT AND
TEFLON FILLED PHENOLIC
 - 3. ACTUATOR ROD MADE OF HIGH STRENGTH PLASTIC
 - 4. UL AND CSA APPROVALS APPLY TO BASIC SWITCH ONLY

CHARACTERISTICS	ELECTRICAL DATA
TOTAL TRAVEL:	CONTACT ARRANGEMENT
.250 APPROX PUSH DIRECTION	S P D T
.187 APPROX PULL DIRECTION	
FULLY DEPRESSED FORCE-- 4 LBS MAX	5A 125, <u>250</u> , 277 VAC 1/10HP <u>250</u> VAC

DESIGN UNITS: INCH		
TOLERANCES UNLESS NOTED:		
NO PLACES	X	±
ONE PLACE	.X	± 0.030
TWO PLACE	.XX	± 0.015
THREE PLACE	.XXX	± 0.005
ANGLES	X	± °
THIRD ANGLE PROJECTION		

DRAWN	BS	18JAN08
CHECK	BLR	18JAN08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
Pro/ENGINEER 3D		

Honeywell			
TITLE			
ASSEMBLY-SWITCH			
SIZE	TYPE	DRAWING NAME	REV
B	I	23AC82	3
SCALE	2:1	SHEET	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[23AC82](#)