

## Bus system cable - PSM-CABLE-PROFIB/FC - 2744652


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PROFIBUS cable, Fast Connect type, up to 12 Mbps (02YSY (ST)CY 1x2x22 AWG)



### Key Commercial Data

Packing unit	1 M
GTIN	 4 017918 836658
GTIN	4017918836658
Weight per Piece (excluding packing)	0.010 g
Custom tariff number	85444993
Country of origin	Germany

### Technical data

#### Dimensions

Length of cable	Free entry (1.0 ... 1000.0 m)
-----------------	-------------------------------

#### General data

Number of positions	2
Signal type/category	PROFIBUS, 12 Mbps
Alternative short product description	PROFIBUS cable

#### Cable

Product labeling	PHOENIX CONTACT PSM-CABLE PROFIBUS/ES 02YSY(ST)CY-1X2X22 AWG (SHIELDED) (UL) E119100 CMG FT4 75°C or CL3 SUN RES or AWM 21694 600V (Cable printing)
Cable type	PROFIBUS in acc. with IEC 61158, Type A
UL AWM style	21694 (60°C / 600 V)

## Bus system cable - PSM-CABLE-PROFIB/FC - 2744652

### Technical data

#### Cable

Signal type/category	PROFIBUS, 12 Mbps
Cable structure	1X2XAWG22/1
Conductor cross section	2x 0.34 mm <sup>2</sup>
AWG signal line	22
Conductor structure signal line	1x 0.65 mm
Core diameter including insulation	2.55 mm
Thickness, insulation	0.95 mm
Wire colors	Red, green
Overall twist	2 wires, twisted
Shielding	Aluminum-coated foil, tinned copper braided shield
Optical shield covering	55 %
External sheath, color	Violet
Outer sheath thickness	0.9 mm
External cable diameter D	8 mm ±0.4 mm
Smallest bending radius, fixed installation	≥ 150 mm
Tensile strength short-term/long-term	≤ 100 N
Cable weight	80 kg/km
Outer sheath, material	PVC FR VI
Material, inner sheath	PVC
Material conductor insulation	PE
Conductor material	Bare Cu wire
Standards/specifications	Conductor material DIN EN 13602 Cu-ETP-A... Shielding material DIN EN 13602 Cu-ETP-A...-B
Insulation resistance	≥ 16 GΩ*km
Loop resistance	≤ 110 Ω (per km)
Cable capacity	approx. 28.5 nF/km (at 1 kHz) ≤ 1500 pF/km (asymmetrical: Conductor to ground)
Signal speed	0.81 c
Shield attenuation	≤ 42 dB/km (at 16 MHz) ≤ 22 dB (at 4 MHz) ≤ 4 dB (at 38.4 kHz) ≤ 2.5 dB (at 9.6 kHz)
Cable impedance	150 Ω ±10 % (3 ... 20 MHz) 185 Ω ±10 % (31.25 ... 38.4 kHz) 270 Ω ±10 % (9.6 kHz)
Test voltage, cable	3600 V DC (3 s)
Flame resistance	according to IEC 60332-3-24 (Cat. C )

# Bus system cable - PSM-CABLE-PROFIB/FC - 2744652

## Technical data

### Cable


	according to CMG FT4
Resistance to oil	Limited resistance to mineral oils and greases
	according to IEC 60811-2-1, 4 h at 70°C
Other resistance	Cold bending resistance According to DIN VDE 0473 Part 811-1-4 (after 16 h at -40°C)
	UV resistant CL3 SUN RES
Ambient temperature (operation)	-40 °C ... 60 °C

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Schematic diagram

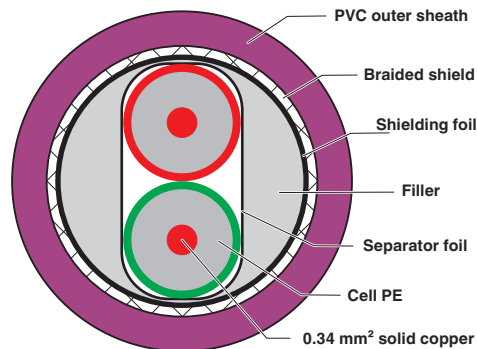

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27062011
eCl@ss 9.0	27062011

## Bus system cable - PSM-CABLE-PROFIB/FC - 2744652

### Classifications

#### ETIM

ETIM 2.0	EC001136
ETIM 3.0	EC001136
ETIM 4.0	EC001136
ETIM 5.0	EC001578
ETIM 6.0	EC001578

#### UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

### Approvals

#### Approvals

---

Approvals

EAC

---

Ex Approvals

---

#### Approval details

EAC		EAC-Zulassung
-----	---	---------------

### Accessories

Accessories

Data plug

## Bus system cable - PSM-CABLE-PROFIB/FC - 2744652

### Accessories

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/90/IDC - 2313672



D-SUB connector, 9-pos., male connector, cable entry < 90°, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; IDC terminal block connection

---

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/90/PG/IDC - 2313685



D-SUB connector, 9-pos., male connector, cable entry < 90°, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; IDC terminal block connection

---

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/90/SC - 2313698



D-SUB connector, 9-pos., male connector, cable entry < 90°, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

---

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/90/PG/SC - 2313708



D-SUB connector, 9-pos., male connector, cable entry < 90°, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

---

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/SC2 - 2708232



D-SUB connector, 9-pos., male connector, cable entry < 35°, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

## Bus system cable - PSM-CABLE-PROFIB/FC - 2744652

### Accessories

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/PG/SC2 - 2708245



D-SUB connector, 9-pos., male connector, cable entry < 35°, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

---

#### D-SUB bus connector - SUBCON-PLUS-PROFIB/AX/SC - 2744380



D-SUB connector, 9-pos., male connector, axial version with two cable entries, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

---

### Stripping tool

#### Stripping tool - PSM-STRIP-FC/PROFIB - 2744623

Quick stripping tool for PROFIBUS cable, type Fast Connect



---

#### Stripping pliers - QUICK WIREFOX 6 - 1204384



Stripping tool for cables with PVC insulation, stripping range: 0.08 to 6 mm<sup>2</sup>, wire cutting up to 6 mm<sup>2</sup> flexible or 4 mm<sup>2</sup> rigid