


MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PUEBLO, ILLINOIS
FED. MFR. CODE 91929

ASSEMBLY- PUSHBUTTON SWITCH

CATALOG LISTING
2PB273-T2

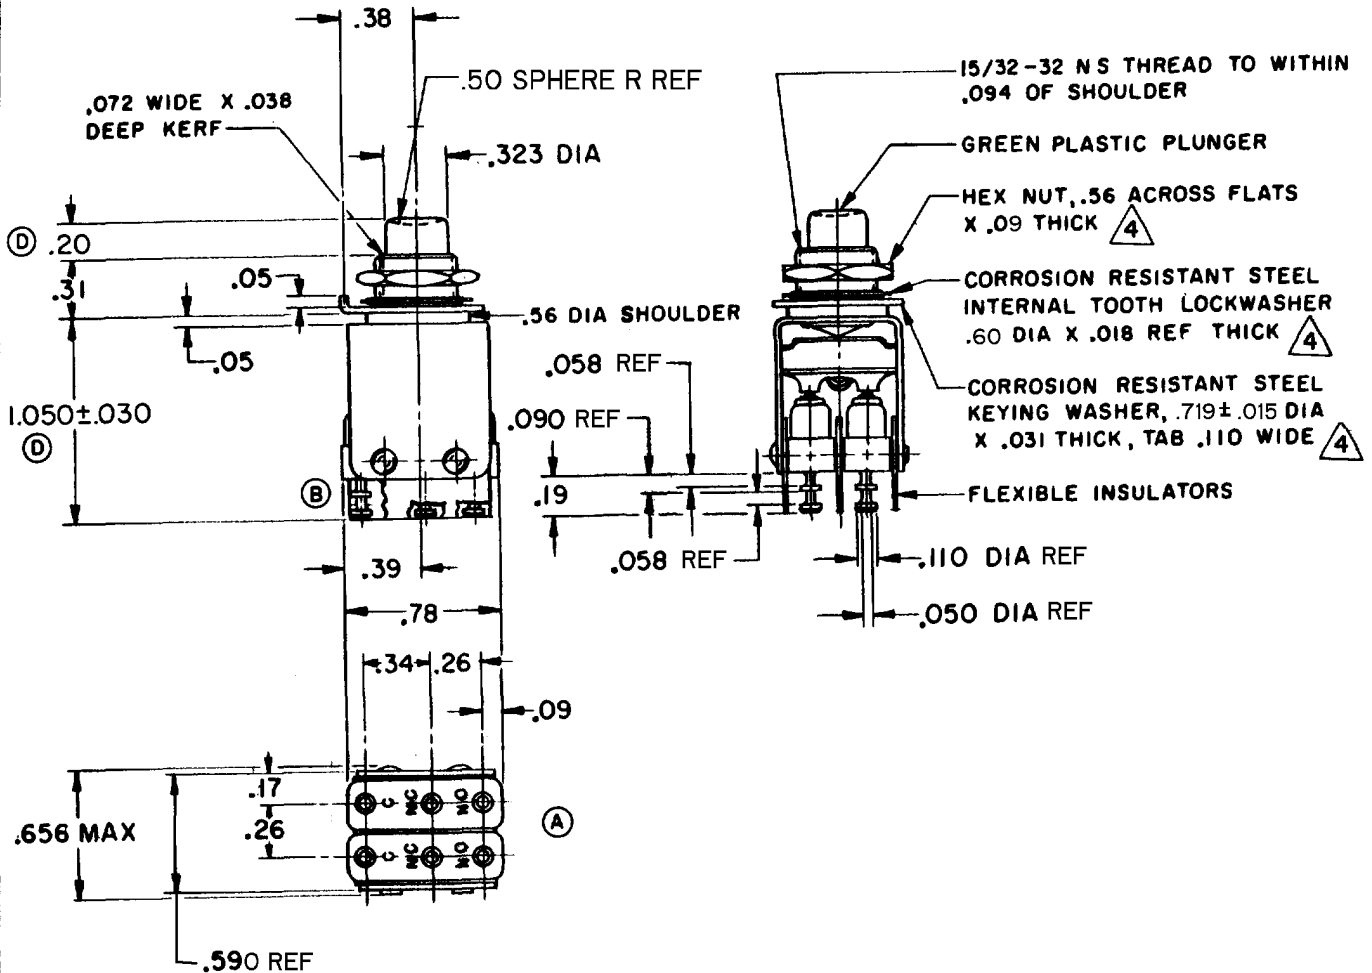

- NOTES
- ① - UNIT INCLUDES "IISM" TYPE BASIC SWITCH (2)
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - ④ MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE — 30 OZ APPROX	CONTACT ARRANGEMENT S P D T (2)	DO NOT SCALE PRINT
TOTAL TRAVEL — .100 APPROX	250 VAC — 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
	30 VOLTS DC RATING	TOLERANCES ARE:
	INDUCTIVE — SEA LEVEL — 3 AMP	ONE PLACE (.0) ±.030
	50,000 FT. — 2.5 AMP	TWO PLACE (.00) ±.015
	RESISTIVE — SEA LEVEL — 5 AMP	THREE PLACE (.000) ±.005
	50,000 FT. — 5 AMP	ANGLES ±
	MAXIMUM INRUSH — 24 AMP	WEIGHT

2PB273-T2

PAGE 1 OF 1

M

DRAWING
NUMBER

8

X

ISSUE

REPLACES

RELEASE NO. SR8747

CHECK

REVISIONS

A CO14941

MBF

1 JULY 60

B CO15520

MBF

15 JUNE 61

C CO17103

MBF

26 OCT 62

D CO19800

MBW

15 JAN 65

E CO31782

MBW

16 MAR 73

F CO-93593

PPF

26 OCT 98

G CO-94273

G J W

15 APR 99

CHECK

24 JAN 60

FORMTEK

FO-50378

DRAWN

L S D

25 JAN 60

CHECK

24 JAN 60