




# DUAL-IN-LINE SOCKETS

## Surface Mount, Auto Placement, Stub Tail Closed Frame

Series 214

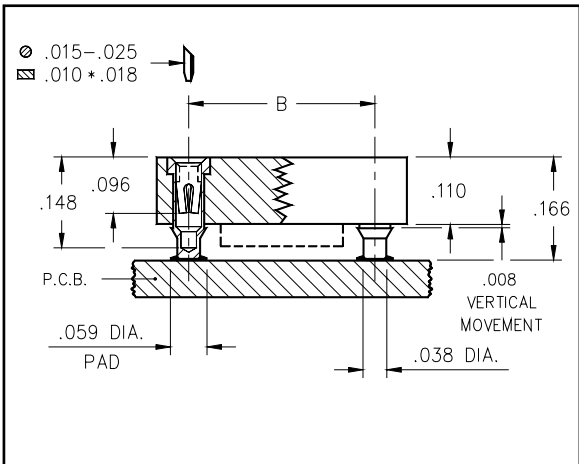

- Closed frame insulator is vision system compatible.
- High-temp Nylon 46 insulator, suitable for infra-red and vapor phase soldering.
- Unique floating contacts compensate for unevenly screened solder paste.
- Available packaged in tubes or on tape & reel per EIA-481.
- Uses Mill-Max #1434 pin.



Total number of pins				<b>Ordering Information</b>																			
	A	B	C	QTY PER TUBE	TUBE PACKAGING	TAPE & REEL PACKAGING	TAPE WIDTH (mm)	QTY PER REEL															
	<b>VACUUM PAD TOP SURFACE ONLY</b>																						
6	0.3	0.3	0.4	67	214-99-306-01-670800	214-99-306-01-670799	16	750															
8	0.4	0.3	0.4	50	214-99-308-01-670800	214-99-308-01-670799	16	1000															
14	0.7	0.3	0.4	28	214-99-314-01-670800	214-99-314-01-670799	32	750															
16	0.8	0.3	0.4	25	214-99-316-01-670800	214-99-316-01-670799	32	750															
18	0.9	0.3	0.4	22	214-99-318-01-670800	214-99-318-01-670799	44	750															
20	1.0	0.3	0.4	20	214-99-320-01-670800	214-99-320-01-670799	44	750															
<b>VACUUM PAD TOP AND BOTTOM</b>																							
24	1.2	0.6	0.7	16	214-99-624-01-670800	214-99-624-01-670799	44	400															
28	1.4	0.6	0.7	14	214-99-628-01-670800	214-99-628-01-670799	56	400															
32	1.6	0.6	0.7	12	214-99-632-01-670800	214-99-632-01-670799	56	400															
40	2.0	0.6	0.7	10	214-99-640-01-670800	NOT AVAILABLE																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>PLATING CODE =</td> <td></td> <td></td> <td></td> <td style="text-align: center;"><b>99</b></td> </tr> <tr> <td>Sleeve (Pin) </td> <td></td> <td></td> <td></td> <td>200µ" Sn/Pb</td> </tr> <tr> <td>Contact (Clip) </td> <td></td> <td></td> <td></td> <td>200µ" Sn/Pb</td> </tr> </table>									PLATING CODE =				<b>99</b>	Sleeve (Pin)				200µ" Sn/Pb	Contact (Clip)				200µ" Sn/Pb
PLATING CODE =				<b>99</b>																			
Sleeve (Pin)				200µ" Sn/Pb																			
Contact (Clip)				200µ" Sn/Pb																			