


System connectors - FLKM 50-PA/GE - 2290672

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter, for GE-FANUC series 90-70, 1 x 32 channels can be connected, digital input, digital output

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 058173
Weight per Piece (excluding packing)	156.1 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Nominal voltage U_N	< 50 V AC 60 V DC
Max. permissible current	1 A (per path)
Max. permissible total current	2 A (per Byte, for supply via connector)
Mounting position	any
Standards/regulations	IEC 60664 IEC 60664A DIN VDE 0110 DIN VDE 0160 (in parts)
Degree of pollution	2
Overvoltage category	II

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Connection data 1

System connectors - FLKM 50-PA/GE - 2290672

Technical data

Connection data 1

Connection name	Controller level
Channels which can be connected	32

Standards and Regulations

Standards/regulations	IEC 60664
	IEC 60664A
	DIN VDE 0110
	DIN VDE 0160 (in parts)
Degree of pollution	2
Overvoltage category	II

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC001423


UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

System connectors - FLKM 50-PA/GE - 2290672

Circuit diagram

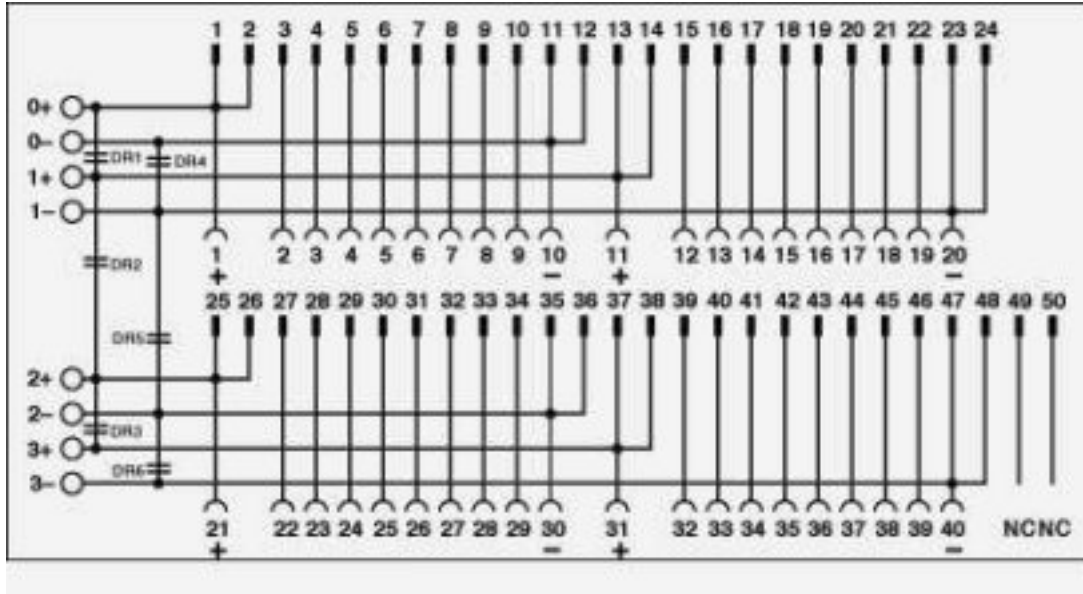

Connection scheme FLKM 50-PA/GE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2290672](#)