


Product Details for 2 - 603325 - 4

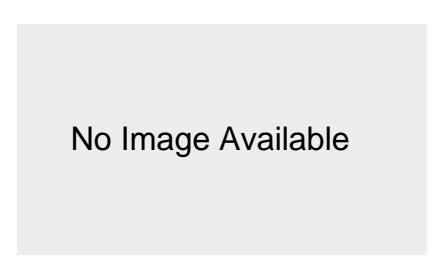

2 - 603325 - 4

[Active](#)

Heat Shrink Tubing

[RoHS Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Jacket Tubing
- ? General Purpose Application
- ? Operating Temperature = -30 - 125 °C
- ? Inside Diameter (Min -Max) = 2.38 - 4.76 mm
- ? Without Sealant

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [AMPSULATION VFP21 AND FP21, 3/16 IN. EXPANDED ID](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? [Heat Shrink Tubing](#) (PDF, English)

Instruction Sheets:

- ? None Available

CAD Files: ([CAD Format & Compression Information](#))

- ? [3D Model](#) (STEP, Version V)
- ? [3D Model](#) (IGES, Version V)
- ? [2D Drawing](#) (DXF, Version V)

[List all Documents](#)

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Jacket Tubing
- ? [Sealant](#) = Without
- ? Style = VFP21
- ? Size = 4.76 [.188]
- ? Color = Black
- ? Material = Polyolefin
- ? Proprietary Name = AMPSULATION

Body Related Features:

- ? [Marked](#) = Yes
- ? [Shrink Ratio](#) = 2:1
- ? [Wall Style](#) = Thin
- ? [Wall Thickness - Full Recovery \(Nominal\) \(mm \[in\]\)](#) = 0.51 [0.020]
- ? [Length \(M \[ft\]\)](#) = 76.20 [250.00]
- ? Marking Color = White

Housing Related Features:

- ? [Inside Diameter \(Min -Max\) \(mm \[in\]\)](#) = 2.38 - 4.76 [0.093 - 0.187]

Industry Standards:

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Not relevant for lead free process
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? Operating Temperature (°C) = -30 - +125

Operation/Application:

- ? Application = General Purpose

Packaging Related Features:

- ? Packaging Method = Reel
- ? Weight per Linear Foot (g [lb]) = 1.442 [0.0032]

Other:

- ? Brand = AMP